

specifications

Small form factor fiber optic modules and connectors shall be compliant with the TIA FOCIS-6 Fiber Jack (FJ) interface specification. RJ-45 style module and connector shall be field terminable in one module space with no adapter. The fibers shall terminate in 2.5mm ferrules with non-optical disconnect and typical insertion loss of 0.1dB per connector.



MINI-COM® OPTI-JACK® Fiber Optic Module — Multimode

technical information

Fiber cable types: 3.0mm jacketed or 900µm buffered, works with 62.5/125µm or 50/125µm multimode

Ferrule type: Ceramic (Zirconia)

Insertion loss: 0.1dB typical

Return loss: Greater than 20dB

key features and ...benefits

Small form factor connector	Double the port density in one module space at the outlet and in the telecommunications closet
Proven 2.5mm ferrules	Uses standard termination tools and procedures
Robust design	Protects fibers from mechanical and environmental stress
Non-optical disconnect	Maintains data transmission under tensile load
RJ-45 form factor	Familiar to end-users, snaps into all <i>MINI-COM</i> outlets and modular patch panels
Field terminable module and connector	Allows flexibility to assemble special length patch cords on site
Adapterless	Fewer components to order and inventory
Flush mount	Unused ports do not protrude from the wall; can be used with shuttered faceplates
TIA standardization	FOCIS-6 interface approved at the TIA, required for TIA/EIA-568-B.3
Keyed solution available	Provides network security; limits access to highly sensitive, classified and segregated networks

applications

Fiber-to-the-desk: The *OPTI-JACK* fiber optic module is the ultimate desktop fiber connector. The 2.5mm ferrule provides robustness required for this demanding environment. The FJ interface module and connector design is familiar to the end user and is polarized to prevent mismatch of transmit and receive cables. Because there is no adapter, unused ports remain flush with the wall and away from damage. Shuttered faceplates can be used for further protection of the unused ports. The modularity with copper connectors allows for the complete data-communications solution to every workstation in one outlet.

Keyed network security: Four color-coded, keyed configurations of the module and connector are available to provide mechanical and visual differentiation to prevent unintentional insertion into adjacent ports. Provides network security for military, government, financial and educational applications. Universal keyed connector available for testing purposes.

Telecommunications closet: The high port density of the *OPTI-JACK* module reduces the space requirements for fiber terminations in the closet. This allows the end user to use less rack space and purchase fewer fiber enclosures. The multiple color options allow color coding of different networks or areas of the building for easier troubleshooting.

OPTI-JACK Fiber Optic Module

Multimode: FJJGM5C**

OPTI-PLUG™ Fiber Optic Connector

Multimode: FJEPGM5C**

Plug to Plug Coupler

Plug to plug coupler: FJGCCEI
(primarily used in testing)

Termination Tooling

Termination kit: FJKITG
Consumables kit: FJKITG-RFB

Replacement Ferrules (Multimode)

OPTI-JACK module: FJJFRL-X
OPTI-PLUG connector: FJEPFRL-X

Multimode Duplex Patch Cords

OPTI-PLUG connector to OPTI-PLUG connector: F^D6P-6PM‡
OPTI-PLUG connector to OPTI-JACK module: F^D6P-6JM‡
OPTI-PLUG connector to SC: F^D6P-3M‡
OPTI-PLUG connector to ST: F^D6P-2M‡
OPTI-PLUG connector to FC: F^D6P-4M‡
OPTI-PLUG connector (Keyed W) to SC: F^D6PW-3M‡
OPTI-PLUG connector (Keyed W) to ST: F^D6PW-2M‡

All key type (W, X, Y, Z) patch cords available
^Available in 62.5/125µm (6) and 50/125µm (5)
‡Available in 1, 2, 3 and 10 meters

**Substitute for

Colors: EI = Electric Ivory
BL = Black
BU = Blue
IW = Off-White
OR = Orange
WH = White

Keyed Colors: WBL = Keyed W in Black
XRD = Keyed X in Red
YOR = Keyed Y in Orange
ZYL = Keyed Z in Yellow

"X" = Bag of 10 ferrules and crimp sleeves

installer tip


A-B polarity easily reversed by removing module cover.

MINI-COM® OPTI-JACK® Fiber Optic Module — Multimode


Standards Compliant Connector Performance

TIA 455	ISO/IEC 874-1	Description	Test Procedure and TIA/EIA-568-B.3 Required Performance	Performance After Test
1	--	Flex	100 cycles; -180 to 180 degrees; max. insertion loss 0.75dB, min. return loss 20dB	<0.2dB additional loss
2	4.5.11	Impact	8 drops from 1.8m; max. insertion loss 0.75dB, min. return loss 20dB	<0.1dB additional loss
4	4.5.18	High Temperature	4 days at 60°C followed by post-conditioning FOTP-6; max. insertion loss 0.75dB, min. return loss 20dB	<0.2dB additional loss
5	4.4.19	Humidity	4 days at 90-95% RH and 40°C; max. insertion loss 0.75dB, min. return loss 20dB max. change during test 0.4dB	<0.1dB additional loss
6	4.5.4	Cable Retention	11.24 lbs. at 0 degrees, 4.4 lbs. at 90 degrees; max. insertion loss 0.75dB, min. return loss 20dB max. change during test 0.5dB	<0.2dB additional loss
21	4.5.32	Durability	500 mate/unmate cycles; max. insertion loss 0.75dB, min. return loss 20dB	<0.1dB additional loss
34	4.4.7	Insertion Loss	max. insertion loss 0.75dB, min. return loss 20dB	0.1dB typical
36	4.5.5	Twist	10 cycles; 2.5 cw, 5 ccw, 2.5 cw; max. insertion loss 0.75dB, min. return loss 20dB	<0.1dB additional loss
107	--	Return Loss	20dB minimum return loss	>20dB
185	4.5.6	Coupling Strength	7.4 lbs. at 0 degrees; max. insertion loss 0.75dB, min. return loss 20dB	<0.1dB additional loss
188	4.5.17	Low Temperature	4 days at 0°C; max. insertion loss 0.75dB, min. return loss 20dB max. change during test 0.3dB	<0.1dB additional loss


NOTE: Above tests performed at 850 and 1300nm on 3.0mm jacketed fiber cable.

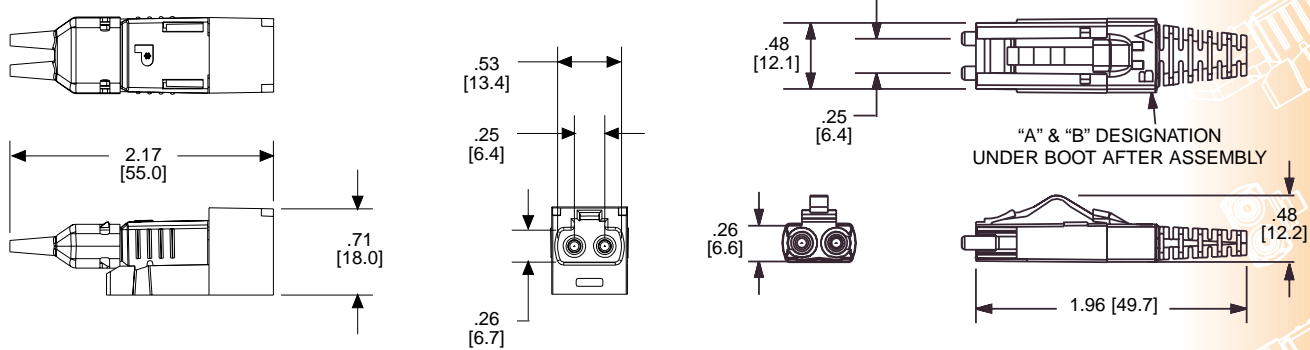


Keyed W - Black



Keyed X - Red



Keyed Y - Orange



Keyed Z - Yellow



Dimensions are in inches (Dimensions in parentheses are in millimeters)

Our products are warranted to be free from defects in material and workmanship at the time of sale but our obligation under this warranty is limited to the replacement of any product proved to be defective within 6 months (for product) or 90 days (for tools) from the date of delivery. Tool warranty is void if Panduit tools are modified, altered or misused in any way. Use of Panduit tooling with any product other than the specified Panduit products for which the tool was designed, constitutes misuse. Before using, user shall determine the suitability of the product for his intended use and user assumes all risk and liability whatsoever in connection therewith.



WORLD HEADQUARTERS
PANDUIT CORP.
Tinley Park, Illinois, USA
Phone: 888-506-5400, ext. 6914
708-532-1800, ext. 6914
Fax: 708-460-2897
Email: info@panduit.com
Internet: www.panduit.com/ncg

This warranty is made in lieu of and excludes all other warranties, expressed or implied. THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR USE ARE SPECIFICALLY EXCLUDED. Neither seller nor manufacturer shall be liable for any other injury, loss or damage whether direct or consequential, arising out of the use of, or the inability to use, the product.

The information contained in this literature is based on our experience to date and is believed to be reliable. It is intended as a guide for use by persons having technical skill at their own discretion and risk. We do not guarantee favorable results or assume any liability in connection with its use. Dimensions contained herein are for reference purposes only. For specific dimensional requirements consult the factory. This publication is not to be taken as a license to operate under, or a recommendation to infringe any existing patents. This supersedes and voids all previous literature, etc.

**For Pricing and Further Information —
Contact your local authorized
PANDUIT PAN-NET™ Distributor or Sales Office**

PANDUIT CANADA
Div. of PANDUIT CORP.
Markham, Ontario
Phone: 905-475-6922

EUROPEAN HEADQUARTERS
PANDUIT EUROPE LTD.
London, UK
Phone: 44(0) 208-601-7200

ASIAN HEADQUARTERS
PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: (65) 379 6700

PANDUIT CORP.
Japan Branch
Phone (81) (3) 3767-7011

PANDUIT MEXICO/LATIN AMERICA
& CARIBBEAN
Phone: (52) 3 666-2501

PANDUIT (AUST.) PTY. LTD.
Phone: (61) 3-9794 9020

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fiber Optic Connectors](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[0004700001](#) [6100-R](#) [6313](#) [F709034706](#) [F709722200](#) [F718183204](#) [F727403500](#) [F727752800](#) [FCXO-12-3BY](#) [FO-SCREW\(M2X6\)](#) [9440F20-27S-190](#) [944-120-6001](#) [944-125-6003](#) [9441F10SL-3S](#) [9446F10SL-4S](#) [953-101-5310-P](#) [954-101-57202B](#) [A0270169](#) [12-9122](#) [12-5702](#) [143025NC](#) [AX101713](#) [AX102420](#) [AX103923](#) [AX104141](#) [AX104193](#) [AX104228](#) [AX104230](#) [AX104562](#) [AX105203-B25](#) [AX105205-S1](#) [EHSC2M](#) [17-300800](#) [181-011-126](#) [BT34IW](#) [HRFCP-HSCJ-1\(61\)](#) [HRFC-R2\(40\)](#) [NKSOPBUY](#) [20500002116](#) [2064996-1](#) [20800001065](#) [2170](#) [9132](#) [2612](#) [2620](#) [9291](#) [9440F18-19S](#) [9440F20-14P](#) [9440F20-14PW](#) [9440W18-1S](#)