


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. DIAMETER DIMENSION, SHOWN FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [ ] ARE ENGLISH.
3. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

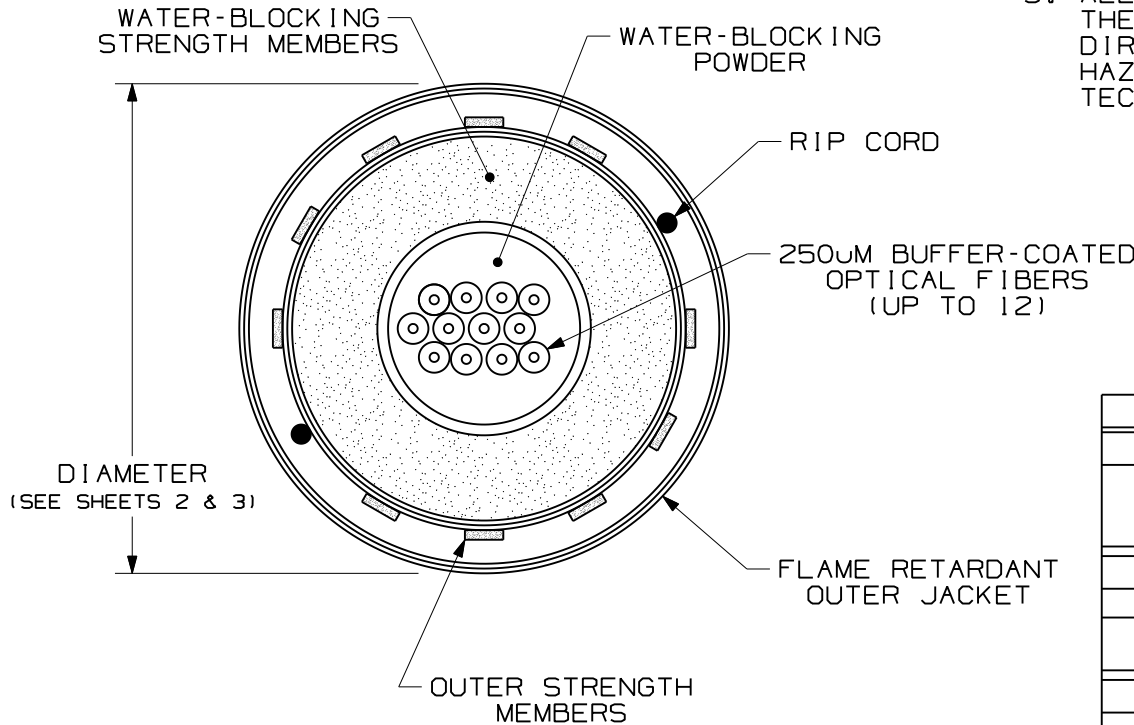


TECHNICAL SPECIFICATIONS		
MAXIMUM LOSS		SINGLEMODE MAXIMUM LOSS
3.5 dB/KM @ 850nm 1.5 dB/KM @ 1300nm		.40 dB/KM @ 1310nm .30 dB/KM @ 1500nm
TENSILE LOAD - RISER RATED		
INSTALLATION		LONG TERM
1335 N (300 lbf)		400 N (90 lbf)
TEMPERATURE		
INSTALLATION	OPERATION	STORAGE
-20° C TO +60° C -4° F TO +140° F	-40° C TO +75° C -40° F TO +167° F	-40° C TO +85° C -40° F TO +185° F

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
06	04-28-11	EFK		RELEASED TO PRODUCTION	02055-144				

OPTI-CORE INDOOR/OUTDOOR CABLE WITH UP TO 12 FIBERS IN A CENTRAL TUBE  
CUSTOMER DRAWING



**PANDUIT**™  
CORP.  
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.  
DIMENSIONAL TOLERANCES ARE:  
(.X) (.XXX)±0.3 (.010)  
(.XX)±0.8 (.03) ANGLES

DRAWING FILENAME  
MO2055CB\_DC\_/00G

SCALE  
NONE

DRAWN BY  
EFK

REVIEW DRAWING NUMBERS

PART NO.  
FSC\*\*\*\*Y  
FOC\*\*\*\*Y

DATE  
02-12-07

CHK'D  
WMA

DRAWING NO.  
02055-144

SIZE  
A



SHEET 1 OF 3



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	FIBER TYPE	JACKET RATING	JACKET COLOR	FIBER COUNT	DIMENSION "A"	BEND RADIUS	
						INSTALLED	LONG TERM
FSCR506Y	MULTIMODE 50/125	OFNR	BLACK	6	6.5mm [ 0.256" ]	9.9cm [ 3.9" ]	6.6cm [ 2.6" ]
FSCR512Y				12			
FSCP506Y				OFNP			
FSCP512Y		12					
FSCL506Y		OFNR-LS	AQUA				
FSCL512Y				12			
FOCRX06Y	MULTIMODE 50/125 OM3	OFNR	BLACK	6	6.5mm [ 0.256" ]	9.9cm [ 3.9" ]	6.6cm [ 2.6" ]
FOCRX12Y				12			
FOCPX06Y				OFNP			
FOCPX12Y		12					
FOCLX06Y		OFNR-LS	AQUA				
FOCLX12Y				12			
FOCRZ06Y	MULTIMODE 50/125 OM4	OFNR	BLACK	6	6.5mm [ 0.256" ]	9.9cm [ 3.9" ]	6.6cm [ 2.6" ]
FOCRZ12Y				12			
FOCPZ06Y				OFNP			
FOCPZ12Y		12					
FOCLZ12Y		OFNR-LS	AQUA				

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
06	04-28-11	EFK		RELEASED TO PRODUCTION	02055-144				

<b>OPTI-CORE INDOOR/OUTDOOR CABLE WITH UP TO 12 FIBERS IN A CENTRAL TUBE</b>			
CUSTOMER DRAWING			
	<b>PANDUIT</b> <sup>TM</sup> CORP. TINLEY PARK, ILL 60477		
	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) (.XXX)±0.3 (.010) (.XX)±0.8 (.03) ANGLES		DRAWING FILENAME M02055CB_DC/00G SCALE NONE
DRAWN BY EFK	REVIEW DRAWING NUMBERS		PART NO. FSC****Y FOC****Y
DATE 02-12-07			DRAWING NO. 02055-144
CHK'D WMA			SIZE A
SHEET 3 OF 3			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fibre Optic Cables](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[FPD01SBS200](#) [FPD06SCC200](#) [FPT01SBS200](#) [FPDK01SCC100](#) [FCS-HCP-DUPLEX-50M](#) [FOSP45-C](#) [FURA3-20](#) [FURA4-20/A](#) [FURD3-20/A](#) [FURD4-20/A](#) [FURO6-20/A](#) [FUTA3-20](#) [FUTA3-20/A](#) [FUTA4-20](#) [FUTA4-20/A](#) [FUTD3-20/A](#) [FUTD4-20/A](#) [FUTO3-20/A](#) [FUTS3-20](#) [FUTS3-20/A](#) [FUTS4-20](#) [FUTS4-20/A](#) [943-99595-10030](#) [FUT-FARR25-20](#) [HFBR-RUD100](#) [2799445](#) [28320002](#) [28030002](#) [28000002](#) [28020002](#) [28051002](#) [28052002](#) [28351002](#) [28320001](#) [28000001](#) [28020001](#) [AERO-AS04-012-A-0X12026BKTT](#) [AERO-DF03-002-D-0XC18TT](#) [HFBR-EUS100Z](#) [HFBR-RUS100Z](#) [ER-500-1-VC-DCY-02-D0-0LWD](#) [EXO-G0-04-A-0LC32BKTT](#) [EXO-G0-08-A-0LC32GYTT](#) [EXO-G0-12-A-0XC32BKTT](#) [EXO-G0-24-A-0XC32BKTT](#) [MK-AX2-04-SM2](#) [106800-0105](#) [106800-0059](#) [106800-0098](#) [106800-0064](#)