


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE		REEL QTY.	COLOR (DIN)	MAX. WIRE INSUL. DIA.	WIRE CLASS	DIMENSIONS - in [mm]				CP-881 INSERTS	CA10 DIE SET
	AWG	[mm ²]					L	P	OD (REF.)	ID		
* FSD75-8-5K10	22-20	[0,50]	5000	WHITE	.09 [2,4]	B, K, M	.57 [14,5]	.31 [8]	.05 [1,4]	.04 [1,0]	WHITE INSERTS	CD10-1
* FSD75-8-3K10	22-20	[0,50]	3000	WHITE	.09 [2,4]	B, K, M	.57 [14,5]	.31 [8]	.05 [1,4]	.04 [1,0]		
FSD76-8-5K8	18	[0,75]	5000	GRAY	.10 [2,6]	B, K, M	.57 [14,5]	.31 [8]	.06 [1,6]	.05 [1,2]	GRAY INSERTS	
FSD76-8-3K8	18	[0,75]	3000	GRAY	.10 [2,6]	B, K, M	.57 [14,5]	.31 [8]	.06 [1,6]	.05 [1,2]		
FSD77-8-5K2	-	[1,0]	5000	RED	.11 [2,8]	B, K, M	.57 [14,5]	.31 [8]	.07 [1,8]	.06 [1,4]	RED INSERTS	CD10-2
FSD77-8-3K2	-	[1,0]	3000	RED	.11 [2,8]	B, K, M	.57 [14,5]	.31 [8]	.07 [1,8]	.06 [1,4]		
FSD78-8-5K0	16	[1,5]	5000	BLACK	.13 [3,3]	B, K, M	.57 [14,5]	.31 [8]	.08 [2,1]	.07 [1,7]	BLACK INSERTS	
FSD78-8-2KD0	16	[1,5]	2500	BLACK	.13 [3,3]	B, K, M	.57 [14,5]	.31 [8]	.08 [2,1]	.07 [1,7]		
FSD80-8-3K6	14	[2,5]	3000	BLUE	.15 [3,9]	B, K, M	.57 [14,5]	.31 [8]	.10 [2,6]	.09 [2,2]	BLUE INSERTS	CD10-3
FSD80-8-KD6	14	[2,5]	1500	BLUE	.15 [3,9]	B, K, M	.57 [14,5]	.31 [8]	.10 [2,6]	.09 [2,2]		

* UL LISTED WITH 20 AWG ONLY, UL486F SCOPE IS 20 - 1/0 AWG. WHITE IS DIN COLOR FOR 20 AWG [0,5]

NOTES:

- USED FOR:
 - UL LISTED WITH STRANDED COPPER WIRE ONLY
 - 221°F [105°C] MAX. OPERATING TEMPERATURE
- INSTALLATION TOOLS PANDUIT APPROVED:
 - CP-871 WITH CA10 APPLICATOR
 - CP-881
- WIRE STRIP LENGTH: 13/32" ^{+1/32} ₋₀ [10,0^{+0,8} ₋₀]
- MATERIAL:
 - STAMPING: COPPER, TIN PLATED
 - HOUSING: POLYPROPYLENE, COLOR CODED
 - COLOR CODE CONFORMS TO DIN STANDARD
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- FOR TOLERANCING REFER TO DIN 46228 PART 4

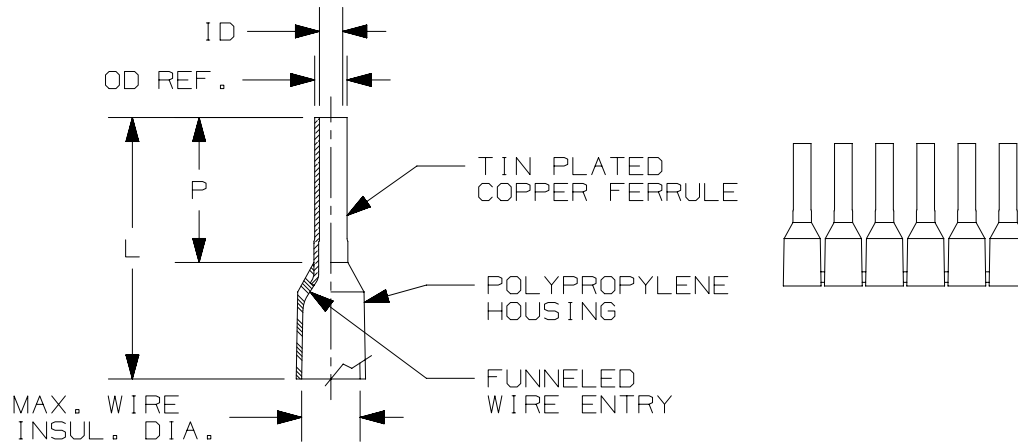

TITLE						
FERRULES WITH SLEEVES ON CONTINUOUS REEL (DIN)						
CUSTOMER DRAWING						
ITEM REVISION NAME					N41737BA/09	
DATASET FILE NAME					N41737BA_DC/09	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					MATERIAL:	
.X ±					.XXX ±	
.XX ±					ANGLES ±	
					THIRD ANGLE PROJECTION	
DRAWN BY					DATE	
DAW					1/07	
CHK					SCALE	
LCA					N.T.S.	
DRAWING NUMBER:					A41737	
SHT 1 OF 1					SIZE	
					A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09	6/15	TMR	TMR	RGB	ADDED WIRE CLASSES TO TABLE	N41737BA-DC
08	3/15	JHNU	TMR	RGB	FSD76 WAS 20AWG, FSD77 WAS 18AWG	N41737BA-DC
07	12/14	JHNU	TMR	RGB	ADDED cULus LOGO REVISED NOTE 1A, ADDED NOTE 4C	N41737BA-DC
06	8/14	JHNU	JHNU	RGB	ADDED FSD75-8-3K10, FSD76-8-3K8, FSD77-8-3K2, FSD78-8-2KD0, FSD80-8-KD6	N41737BA-DC
05	4/14	JHNU	JHNU	RGB	UPDATED CP-881 TOOLING REVISED NOTE 2, REMOVED PKG. QTY. NOTE	N41737BA-DC

D10100DA/16

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[00-054007-01074-6](#) [00-054007-70206-1](#) [00-054007-70210-8](#) [00-054007-70217-7](#) [00-054007-70226-9](#) [00-054007-70228-3](#) [00-054007-70248-1](#) [00-054007-70256-6](#) [00-054007-70301-3](#) [00-054007-70316-7](#) [0-0320562-0](#) [00-054007-49560-4](#) [00-054007-70209-2](#) [00-054007-70225-2](#) [00-054007-70227-6](#) [00-054007-70231-3](#) [00-054007-70241-2](#) [00-054007-70242-9](#) [00-054007-70244-3](#) [00-054007-70246-7](#) [00-054007-70263-4](#) [00-054007-70288-7](#) [00-054007-70290-0](#) [00-054007-70300-6](#) [00-054007-70304-4](#) [01-2065-1-0216](#) [01-2900-1-04412](#) [00581P0075](#) [600TS-10](#) [60205-1](#) [604200-1](#) [605601-1](#) [60598-1-CUT-TAPE](#) [61314-6-C](#) [61810-3](#) [61-S](#) [61-SN](#) [626-0194](#) [62-NBM-A](#) [62-SN](#) [62-SP](#) [63-S](#) [640179-1](#) [M55155/059I03](#) [M55155/079C01](#) [M55155/099H02](#) [M55155/109H01](#) [M55155/109H02](#) [M55155/12XH05](#) [M55155/16XH02](#)