


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

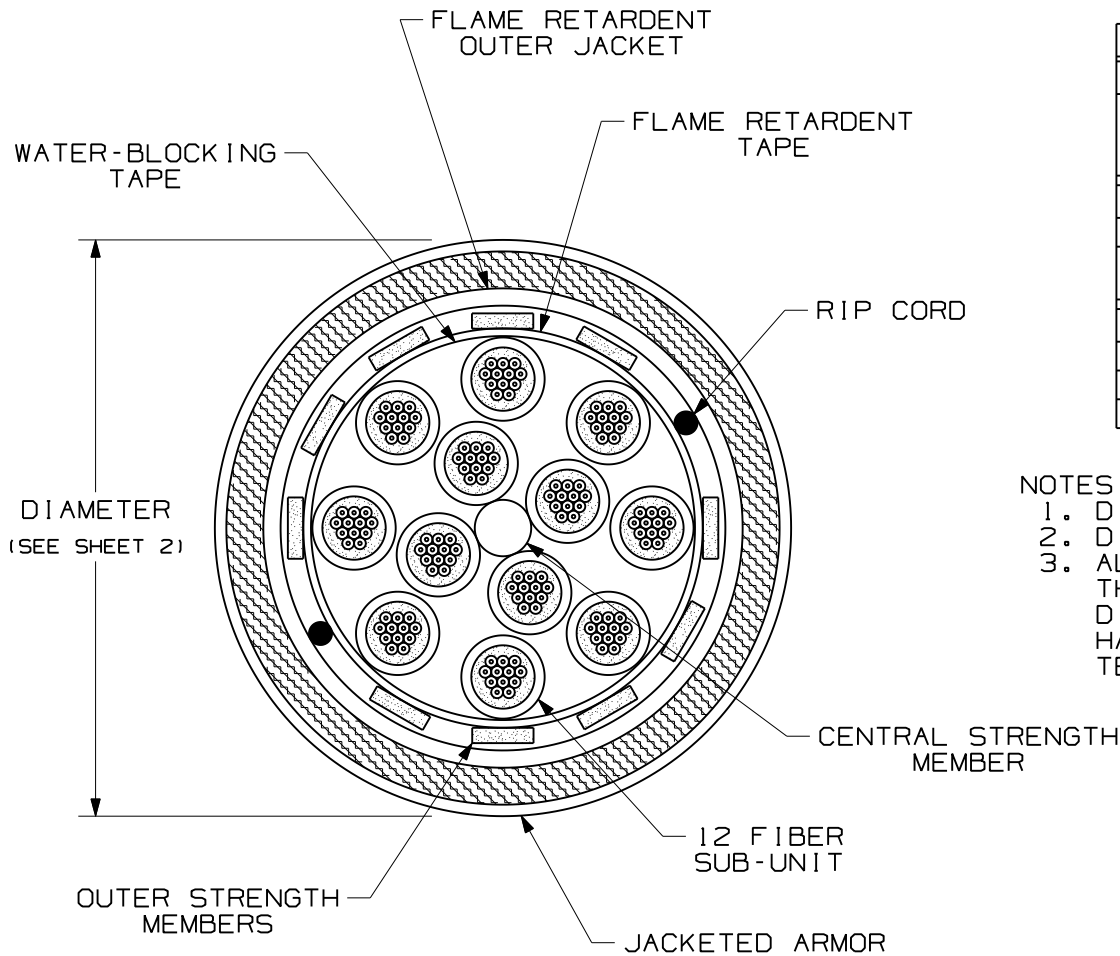

TECHNICAL SPECIFICATIONS		
MAXIMUM LOSS		SINGLEMODE MAXIMUM LOSS
3.5 dB/KM @ 850nm 1.5 dB/KM @ 1300nm		.75 dB/KM @ 1310nm .75 dB/KM @ 1500nm
TENSILE LOAD - RISER RATED		
INSTALLATION		LONG TERM
2700 N (600 lbf)		800 N (180 lbf)
OPERATION	OFCR	OFCP/LSZH
OPERATION	-20° C TO +50° C (-4° F TO +122° F)	0° C TO +50° C (+32° F TO +122° F)
INSTALLATION		
STORAGE	-40° C TO +65° C (-40° F TO +149° F)	

NOTES:

1. DIAMETER DIMENSION, SHOWN FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS () ARE ENGLISH.
3. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
02	10-27-09	EFK		RELEASED TO PRODUCTION	02055-96				

OPTI-CORE 144 FIBER INDOOR/OUTDOOR ARMORED CABLE WITH (12) 12 FIBER SUB-UNITS
CUSTOMER DRAWING

PANDUIT™
CORP.
TINLEY PARK, ILL 60477

ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX) ± 0.3 (.010)
(.XX) ± 0.8 (.03) ANGLES

THIRD ANGLE PROJECTION



DRAWING FILENAME: MO2055BY_DC_144/00C
SCALE: NONE

DRAWN BY: MC
REVIEW DRAWING NUMBERS

DATE: 06-03-05
PART NO.: FSM**1AY
FOM**1AY

CHK'D: WMA
DRAWING NO.: 02055-96
SHEET 1 OF 2
SIZE: A

PANDUIT PART NUMBER	FIBER TYPE	JACKET RATING	DIAMETER	BEND RADIUS	
				INSTALLED	LONG TERM
FSMR91AY	SINGLEMODE 9/125µM	OFCR	26.1mm (1.028")	52.2cm (20.6")	26.1cm (10.3")
FSMP91AY		OFCP			
FSML91AY		OFCR-LS			
FSMR51AY	MULTIMODE 50/125µM	OFCR	26.1mm (1.028")	52.2cm (20.6")	26.1cm (10.3")
FSMP51AY		OFCP			
FSML51AY		OFCR-LS			
FSMR61AY	MULTIMODE 62.5/125µM	OFCR	26.1mm (1.028")	52.2cm (20.6")	26.1cm (10.3")
FSMP61AY		OFCP			
FSML61AY		OFCR-LS			
FOMRX1AY	MULTIMODE 50/125µM OM3	OFCR	26.1mm (1.028")	52.2cm (20.6")	26.1cm (10.3")
FOMPX1AY		OFCP			
FOMLX1AY		OFCR-LS			
FOMRZ1AY	MULTIMODE 50/125µM OM4	OFCR	26.1mm (1.028")	52.2cm (20.6")	26.1cm (10.3")
FOMPZ1AY		OFCP			

																OPTI-CORE 144 FIBER INDOOR-OUTDOOR ARMORED CABLE WITH (12) 12 FIBER SUB-UNITS CUSTOMER DRAWING				
																	PANDUIT TM CORP. TINLEY PARK, ILL 60477			
																	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) (.XXX) ± 0.3 (.010) (.XX) ± 0.8 (.03) ANGLES	DRAWING FILENAME MO2055BY_DC_144/00C SCALE NONE		
																	DRAWN BY MC	REVIEW DRAWING NUMBERS	PART NO. FSM**1AY FOM**1AY	
02	10-27-09	EFK		RELEASED TO PRODUCTION		02055-96											DATE 06-03-05		DRAWING NO. 02055-96	SIZE A
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	CHK'D	WMA								SHEET 2 OF 2	

↓

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Panduit](#) manufacturer:

Other Similar products are found below :

[CF502550F-Q](#) [PK14-8R-X](#) [PK10-56R-L](#) [PCV-110CY](#) [PSL-SCBD-EI](#) [CBX4AW-AY](#) [CBXS2AW-A](#) [CS25-18SL-CY](#) [CFPFLS2SAW](#) [PK10-10R-X](#) [PUM-925-C0](#) [SICH38-C](#) [SICH25-C](#) [CCS19-S8-X](#) [CCH57-S12-M30](#) [PCMBR-13](#) [PCPA11IW](#) [CRE32](#) [M200X042UPT](#)
[M200X050ACT](#) [M200X080FQT](#) [M200X100ACT](#) [M200X100AIT](#) [CRTW](#) [CSVBP](#) [CT-1000](#) [CT-1004](#) [CT-1104](#) [CT-2550CH](#) [CT-2570CH](#)
[M300X050ACT](#) [M300X100ACT](#) [CT-900HPH](#) [CUFB48BL](#) [CVED32VE](#) [CVED32VEPG](#) [CVED40VEN](#) [CVED40VEPG](#) [CWF400](#)
[CWMPV2340](#) [CWMPV2440](#) [CWMPV3340](#) [CWMPV3440](#) [CWST](#) [MBEH-TLR](#) [MBH-MR](#) [MBH-MR316](#) [MBH-TLR316](#) [MBSH-TR](#) [MBS-MR](#)