


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

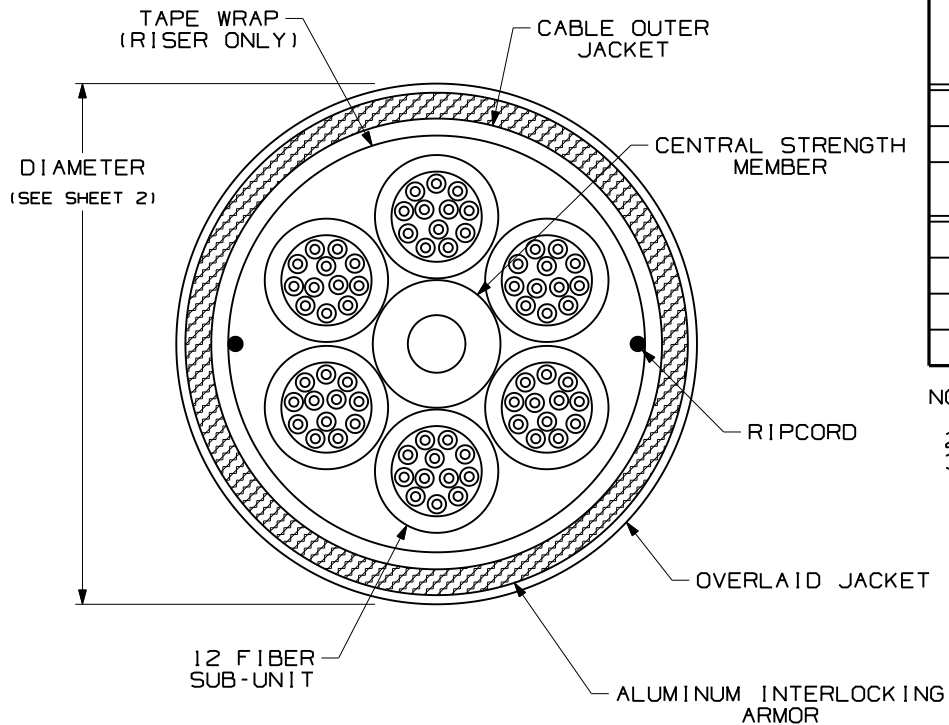


TECHNICAL SPECIFICATIONS			
MAXIMUM LOSS		SINGLEMODE MAXIMUM LOSS	
3.5dB/KM @ 850nm 1.5dB/KM @ 1300nm		.75dB/KM @ 1310nm .75dB/KM @ 1500nm	
TENSILE LOAD - OFCR		TENSILE LOAD - OFCR-LS/OFCP	
INSTALLATION	LONG TERM	INSTALLATION	LONG TERM
1320 N (300 lbf)	330 N (74 lbf)	660 N (150 lbf)	165 N (38 lbf)
OPERATION		OFCR-LS/OFCP	
INSTALLATION		OFCR	
STORAGE		OFCR-LS/OFCP	
-20° C TO +50° C (-4° F TO +122° F)		0° C TO +50° C (+32° F TO +122° F)	
-40° C TO +65° C (-40° F TO +149° F)			

NOTES:

1. DIAMETER DIMENSION, SHOWN FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS () ARE ENGLISH.
3. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.



REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
02	10-26-09	EFK		RELEASED TO PRODUCTION	02055-100				

OPTI-CORE 72 FIBER ARMORED DISTRIBUTION CABLE
WITH 6 SUB-UNITS OF 12 FIBERS
CUSTOMER DRAWING

	PANDUIT ™ CORP. TINLEY PARK, ILL 60477	
	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) (.XXX) ±0.3 (.010) (.XX) ±0.8 (.03) ANGLES	DRAWING FILENAME M02055BX_DC_72/01A SCALE NONE
DRAWN BY MC	REVIEW DRAWING NUMBERS	
DATE 06-03-05	PART NO. FSP**72Y FOP**72Y	
CHK'D WMA	DRAWING NO. 02055-100 SHEET 1 OF 2	
		SIZE A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	FIBER TYPE	JACKET RATING	DIAMETER	BEND RADIUS	
				INSTALLED	LONG TERM
FSPR972Y	SINGLEMODE 9/125UM	OFCR	25.4mm (1.00")	60.2cm (23.7")	30.1cm (11.9")
FSP972Y		OFCP			
FSPL972Y		OFCR-LS			
FSPR572Y	MULTIMODE 50/125UM	OFCR	25.4mm (1.00")		
FSP572Y		OFCP			
FSPL572Y		OFCR-LS			
FSPR672Y	MULTIMODE 62.5/125UM	OFCR	25.4mm (1.00")		
FSP672Y		OFCP			
FSPL672Y		OFCR-LS			
FOPRX72Y	MULTIMODE 50/125UM OM3	OFCR	25.4mm (1.00")		
FOPX72Y		OFCP			
FOPLX72Y		OFCR-LS			
FOPRZ72Y	MULTIMODE 50/125UM OM4	OFCR	25.4mm (1.00")		
FOPPZ72Y		OFCP			

										OPTI-CORE 72 FIBER ARMORED DISTRIBUTION CABLE WITH 6 SUB-UNITS OF 12 FIBERS CUSTOMER DRAWING		
												
										PANDUIT ™ CORP. TINLEY PARK, ILL 60477		
												
										ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) (.XXX)±0.3 (.010) (.XX)±0.8 (.03) ANGLES		
										DRAWING FILENAME M02055BX_DC_72/01A		
										SCALE NONE		
										DRAWN BY MC		
										REVIEW DRAWING NUMBERS		
02	10-26-09	EFK		RELEASED TO PRODUCTION	02055-100					DATE 06-03-05	PART NO. FSP**72Y FOP**72Y	
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	CHK'D WMA	DRAWING NO. 02055-100 SHEET 2 OF 2	SIZE A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Panduit](#) manufacturer:

Other Similar products are found below :

[CF502550F-Q](#) [PK14-8R-X](#) [PK10-56R-L](#) [PCV-110CY](#) [PSL-SCBD-EI](#) [CBX4AW-AY](#) [CBXS2AW-A](#) [CS25-18SL-CY](#) [CFPFLS2SAW](#) [PK10-10R-X](#) [PUM-925-C0](#) [SICH38-C](#) [SICH25-C](#) [CCS19-S8-X](#) [CCH57-S12-M30](#) [PCMBR-13](#) [PCPA11IW](#) [CRE32](#) [M200X042UPT](#)
[M200X050ACT](#) [M200X080FQT](#) [M200X100ACT](#) [M200X100AIT](#) [CRTW](#) [CSVBP](#) [CT-1000](#) [CT-1004](#) [CT-1104](#) [CT-2550CH](#) [CT-2570CH](#)
[M300X050ACT](#) [M300X100ACT](#) [CT-900HPH](#) [CUFB48BL](#) [CVED32VE](#) [CVED32VEPG](#) [CVED40VEN](#) [CVED40VEPG](#) [CWF400](#)
[CWMPV2340](#) [CWMPV2440](#) [CWMPV3340](#) [CWMPV3440](#) [CWST](#) [MBEH-TLR](#) [MBH-MR](#) [MBH-MR316](#) [MBH-TLR316](#) [MBSH-TR](#) [MBS-MR](#)