
\_

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

## NOTES:

- 1. DIAMETER DIMENSION, SHOWN FOR REFERENCE ONLY.
- 2. DIMENSIONS IN BRACKETS [ ] ARE ENGLISH.
- 3. ALL MATERIALS AND COMPONENTS USED MUST MEET
  THE MATERIAL RESTRICTIONS OF ROHS (EUROPEAN
  DIRECTIVE 2002/95/EC ON THE RESTRICTION OF
  HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS
  TECHNICAL ADAPTATION COMMITTEE.

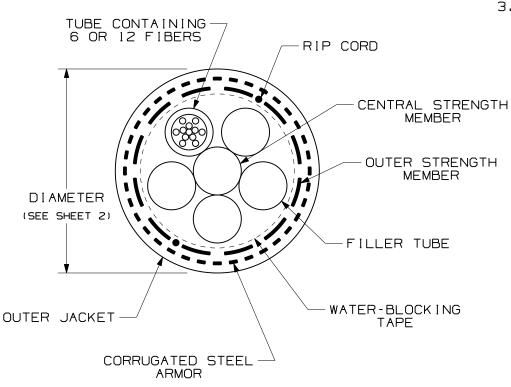

TECHNICAL SPECIFICATIONS								
MAXIMUM LOS	SS	SINGLEMODE MAXIMUM LOSS						
3.5 dB/KM @ 8		.40 dB/KM @ 1310nm .30 dB/KM @ 1500nm						
BEND RADIUS								
INSTALLAT	ION		LONG TERM					
30.0cm		15.0cm						
[11.8in	]	[5.9in]						
TENSILE LOAD								
INSTALLAT	ION		LONG TERM					
2700 N		890 N						
(600 161	· )	(200 lbf)						
TEMPERATURE								
INSTALLATION	OPER	RATION	STORAGE					
-30°C TO +60°C -22°F TO +140°F		TO +70°C O +158°F	-40°C TO +75°C -40°F TO +167°F					

										OUTSIDE PLANT SINGLE ARMOR-SINGLE JACKET CABLE WITH UP TO 12 FIBER SUB-UNITS CUSTOMER DRAWING			
										TM  CORP.  TINLEY PARK, ILL 60477  ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:  (,XX) ±0.3 (.010)  THIRD ANGLE  NONE  NONE			
										EFK		PART NO. FSWN*** FOWN***	
02	10-29-09	EFK		RELEASED TO PRODUCTION	02055-158					07 - 10 - 07		02055-158 A	
REV	DATE	BY	СНК	DESCRIPTION	ECN -	R	CUST	SUP	отн	CHK'D WMA		SHEET 1 OF 2	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	FIBER TYPE	FIBER COUNT	TUBE COUNT	FILLER TUBES	DIAMETER			
FSWN906		6	6   1 WITH 6 FIBERS					
FSWN912	611101 511055	12	1 WITH 12 FIBERS	4				
FSWN924	SINGLEMODE   9/125um	24	2 WITH 12 FIBERS	3				
FSWN936	0, 1230	36	3 WITH 12 FIBERS	2				
FSWN948		48	4 WITH 12 FIBERS	l	]			
FSWN606		6	1 WITH 6 FIBERS	4				
FSWN612	MULTIMODE 62,5/125um	12	1 WITH 12 FIBERS					
FSWN624		24	2 WITH 12 FIBERS	3				
FSWN636		36	3 WITH 12 FIBERS	2				
FSWN648		48	4 WITH 12 FIBERS	l				
FSWN506	MULTIMODE - 50/125um -	6	1 WITH 6 FIBERS	4	15.0			
FSWN512		12	1 WITH 12 FIBERS					
FSWN524		24	2 WITH 12 FIBERS	3	15.0mm [0.59"]			
FSWN536		36	3 WITH 12 FIBERS	2				
FSWN548		48	4 WITH 12 FIBERS	1				
FOWNX06		6	1 WITH 6 FIBERS	4				
FOWNX12		12	1 WITH 12 FIBERS					
FOWNX24	MULTIMODE 50/125um OM3	24	2 WITH 12 FIBERS	3				
FOWNX36	1 30/123011 0113	36	3 WITH 12 FIBERS	2				
FOWNX48		48	4 WITH 12 FIBERS	l				
FOWNZ06		6	l WITH 6 FIBERS	4				
FOWNZ12		12	1 WITH 12 FIBERS					
FOWNZ24	MULTIMODE 50/125um OM4	24	2 WITH 12 FIBERS	3				
FOWNZ36	35, 1230 3111	36	3 WITH 12 FIBERS	2				
FOWNZ48		48	4 WITH 12 FIBERS	1				

										OUTSIDE PLANT SINGLE ARMOR-SINGLE JACKET CABLE WITH UP TO 12 FIBER SUB-UNITS CUSTOMER DRAWING		
										THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED.  DIMENSIONAL TOLERANCES ARE:  (.XX) ±0.8 (.03) ANGLES	DRAWING FILENAME M02055DA_DC_6-48/00C SCALE NONE
										DRAWN BY EFK	REVIEW DRAWING NUMBERS	FSWN***
02	10-29-09	EFK		RELEASED TO PRODUCTION	02055-158					07 - 10 - 07		02055-158 A
REV	DATE	ВҮ	СНК	DESCRIPTION	ECN -	R	CUST	SUP	отн	CHK'D WMA		SHEET 2 OF 2



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Panduit manufacturer:

Other Similar products are found below:

CF502550F-Q PK14-8R-X PK10-56R-L PCV-110CY PSL-SCBD-EI CBX4AW-AY CBXS2AW-A CS25-18SL-CY CFPFLS2SAW PK1010R-X PUM-925-C0 SICH38-C SICH25-C CCS19-S8-X CCH57-S12-M30 PCMBR-13 PCPA11IW CRE32 M200X042UPT

M200X050ACT M200X080FQT M200X100ACT M200X100AIT CRTW CSVBP CT-1000 CT-1004 CT-1104 CT-2550CH CT-2570CH

M300X050ACT M300X100ACT CT-900HPH CUFB48BL CVED32VE CVED32VEPG CVED40VEN CVED40VEPG CWF400

CWMPV2340 CWMPV2440 CWMPV3340 CWMPV3440 CWST MBEH-TLR MBH-MR MBH-MR316 MBH-TLR316 MBSH-TR MBS-MR