
+

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

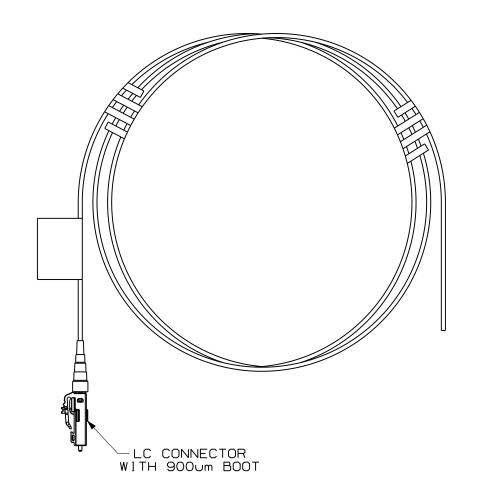

NOTES:

- 1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
- 2. SEE CURRENT CATALOG FOR PATCH CORD/PIGTAIL LENGTHS AND PACKAGE QUANTITY.
- 3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
- 4. TESTED TO EIA/TIA 568-B.3.
- 5. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF ROHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS TECHNICAL ADAPTATION COMMITTEE.

REV	DATE	BY	СНК	DESCRIPTION	ECN -	R	CUST	SUP	ОТН	CHK 'D	1	SHEET 1 OF 2		
R	09-09-09	EFK		RELEASED TO PRODUCTION	02779-63					09 - 09 - 09		02779-63 SIZE		
										DRAWN BY EFK	REVIEW DRAWING NUMBERS	SEE SHEET 2		
										THIRD ANGLE PROJECTION	(.X) (.XXX)±.010 (0.3) (.XX)±.03 (0.8) ANGLES	NUNE		
											ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE:	MO2779CZ_DC/OIA		
											TINLEY PARK, ILL	CORP. 60477		
												TM		
										LC PIGTAIL customer drawing				
											FIBER OPTIC 900um			

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FIBER OPTIC 900um BUFFERED LC PIGTAIL										
PANDU I T		CABLE	CONNECTOR							
PART NO.	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	MIN. RL	BOOT COLOR			
F5B10-NM*		50/125um			0 3540	20dB	BLACK			
F6B10-NM*		62.5/125um	SIMPLEX 900um BUFFERED		0.25dB		ELECTRIC IVORY			
FXB10-NM*		10GbE OM3			0.25dB	26dB	A OL 1A			
FXOB10-NM*	RISER (OFNR)	OPTIMIZED 10G6E 0M3		BLUE	0.15dB	AQUA	λάθλ			
FZB10-NM*		10GbE OM4	FIBER		0.25dB	26dB	AQUA			
FZOB10-NM*		OPTIMIZED 10G6E 0M4			0.15dB	26dB	λάθλ			
F9B10-NM*		9/125um OS1			0.35dB	55dB	BLUE			

^{* -} DENOTES PIGTAIL LENGTH, WHERE M = METERS AND F = FEET

										FIBER OPTIC 900um BUFFERED LC PIGTAIL CUSTOMER DRAWING				
										TINLEY PARK, ILL 60477 ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (I.XX):.03 [0.8] ANGLES NONE THIRD ANGLE FROJECTION I.XXX1:.03 [0.8] ANGLES NONE				
										DRAWN BY EFK	The view of the little of the	SEE TABLE		
R	09-09-09	EFK		RELEASED TO PRODUCTION	02779-63					09-09-09	AS NOTED	02779-63	SIZE	
REV	DATE	BY	СНК	DESCRIPTION	ECN -	R	CUST	SUP	отн	CHK 'D		SHEET 2 OF 2		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Wire Ducting & Raceways category:

Click to view products by Panduit manufacturer:

Other Similar products are found below:

```
800A-LB 801I-LSP 802A-ECSP 802I-ICSP 923223-000 PRAF6WH-X A0405538 1301150342 1301160034 1301170070 1301180011 1301230083 1301230153 1301240273 1301250006 1302261238 1302261321 1302262552 1302263103 1302263178 1302263259 1302263816 1302263860 1302264375 1302264390 1301150343 1301160030 1301170050 1301170051 1301170061 1301180013 1301230086 1301230130 1301240054 1302260055 1302260376 1302261343 1302261344 1302262674 1302263095 1302263166 1302263209 1302263513 1302263851 1302263870 1302264137 1302264218 DD1/J AX101472 AX102007
```