
+

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

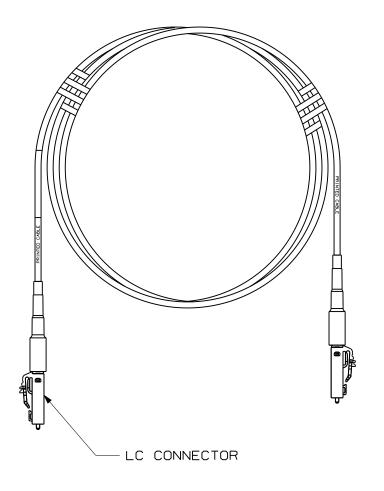

NOTES:

- 1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
- 2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITY.
- 3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
- 4. TESTED TO EIA/TIA 568-B.3.
- 5. PATCH CORD ROUTING CONFIGURATION A TO B.
- 6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF ROHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS TECHNICAL ADAPTATION COMMITTEE.

REV	DATE	BY	СНК	DESCRIPTION	ECN -	R	CUST	SUP	отн	CHK 'D		(SHT. 1 of 2)	$\mid A \mid$		
R	06-04-07	MC		RELEASED TO PRODUCTION	02779-35	5				05-23-07		02779 - 35	SIZE		
										MC		SEE TABLE, SH			
										THIRD ANGLE PROJECTION	(.XX) (.XXX)±.010 (0.3) (.XX)±.03 (0.8) ANGLES	NUNE			
											ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: DIMENSIONAL TOLERANCES ARE:				
											TINLEY PARK, ILL 60477				
										CUSTOMER DRAWING					
										SI	SIMPLEX FIBER OPTIC PATCH CORD LC TO LC CONFIGURATION				

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

SIMPLEX FIBER OPTIC LC TO LC PATCH CORD											
PANDUIT		CABLE	LC CONNECTOR								
PART NO.	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	RL	COLOR				
FXF10-10M*Y		10GbE 50/125um 0M3		AQUA	0.30dB	26dB	ELECTRIC IVORY				
F5F10-10M*Y	RISER	50/125um OM2	SIMPLEX	ORANGE	0.30dB	20dB	ELECTRIC IVORY				
F6F10-10M*Y	(OFNR)	62.5/125um OM1	1.6mm	ORANGE	0.30dB	20dB	ELECTRIC IVORY				
F9F10-10M*Y		9/125um OS1		YELLOW	0.35dB	55dB	BLUE				

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

										SIMPLEX FIBER OPTIC PATCH CORD LC TO LC CONFIGURATION CUSTOMER DRAWING						
										THERD ANGLE	TINLEY PARK, ILL 60477 ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: 10.33 SCALE					
										DRAWN BY MC	REVIEW DRAWING NUMBERS	PART NO. SEE TA	BLE			
R	06-04-07	мС		RELEASED TO PRODUCTION	02779-35					05-23-07		drawing no. 02779 - 35	SIZE			
REV	DATE	BY	СНК	DESCRIPTION	ECN -	R	CUST	SUP	отн	CHK 'D		(SHT. 2 of 2)	A			

4

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fibre Optic Cable Assemblies category:

Click to view products by Panduit manufacturer:

Other Similar products are found below:

7-21002-9 760-1518 FA04390-50-M-72-LC-N MLB 501 V RED MLB 501 V YELLOW 1-3636-600-5208 2061529-7 1-6693182-0
1754898-1 21055-6 FXBSCSCE2LM002 3000005 3-21053-2 MLB 200/1 V BLACK 5492011-6 106284-7000 5492011-5 5492011-8
5492011-9 8-21007-5 2123524-2 2123524-1 106386-4447 DFSM-SCSC-2M 2123909-4 2123909-8 106273-0629 2125046-1 2821236-3
2821310-2 2821310-3 2821313-4 FX2ERLNLNSNM0.5 CF-980062-074 CF-901200-394 CF-980062-073 CF-980062-071 CF-980062-075
CF-980062-072 17-300310-100 2821236-2 2821313-1 G-FC-FC-S-002.0-DX-A-18-Y G-E2A-E2A-S-003.0-SX-A-18-Y 956-322-502214
FA04474 1083665 1111540 1111843 1115533