

QuickNet™ PanMPO™ Round Interconnect Cable Assemblies

technical information

MPO Interconnect Round Cable Assemblies are pre-terminated 12-fiber cable assemblies that are used in high-density network applications. These interconnect round cable assemblies are used with pre-terminated cassettes in main and horizontal cabling distribution areas. The QuickNet™ System meets the demands of Gigabit Ethernet, 10 Gigabit Ethernet, and high speed Fibre Channel systems while maintaining compatibility with Ethernet. The high-density modular design fits into rack mount fiber cassette enclosures to ensure efficient use of space and rapid network deployment.



application

Interconnect cables are small in diameter, extremely flexible and intended for shorter cable runs. These small cables minimize waste, optimize cable management, speed deployment, and improve flexibility and manageability.

construction

Cable type:	3.0mm indoor round
Cable jacket ratings:	Optical Fiber Nonconductive Plenum (OFNP) Low Smoke Zero Halogen (LSZH)
Fiber types:	Multimode: OM3 50/125μm OM4 50/125μm
Connector types; end 'A' and end 'B':	PanMPO™ Female or PanMPO™ Male
Fiber count:	12
Jacket color:	OM3: Aqua OM4: Aqua
Connector types; end 'A' and end 'B':	PanMPO™ Female or PanMPO™ Male

optical properties

Maximum cable attenuation:	Multimode: 3.5dB/km at 850nm 1.5dB/km at 1300nm
Maximum connector insertion loss:	Multimode: 0.50dB
Minimum connector return loss:	Multimode: OM3 26dB OM4 26dB

physical properties

Cable outside diameter (OD):	3.0mm
Minimum bend radius:	30mm
Cable tensile strength:	220N
Flex:	100 cycles at 4.9N
Twist:	10 cycles at 15N
Gender reversal durability:	50 cycles
Polarity reversal durability:	50 cycles

environmental properties

Storage and shipping temperature:	-40°C to 70°C
Installation temperature:	0°C to 40°C
Operating temperature:	-10°C to 60°C

standards

Meets or exceeds TIA/EIA-568-C.3, TIA-604-5 (FOCIS-5), TIA/EIA-568-C.1, RoHS Compliant

QuickNet™ PanMPO™ Round Interconnect Cable Assemblies


part number

Example: FZTRP7N7NANM001 = Fiber OM4, 12-fibers, 3.0mm, plenum rated, PanMPO™ Female to PanMPO™ Female, polarity method A, no pulling eye, 1 meter.

Character	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Example	F	Z	T	R	P	7	N	7	N	A	N	F	0	0	1

<p>1 – Fiber Product F = Fiber</p> <p>2 – Fiber Type X = OM3 50/125 Z = OM4 50/125</p> <p>3 – Fiber Count T = 12-fiber</p> <p>4 – Cable Type R = 3.0mm round indoor</p>	<p>5 – Jacket Type L = Low Smoke Zero Halogen (LSZH) P = Optical Fiber Nonconductive Plenum (OFNP)</p> <p>6 – Connector Type End ‘A’ 7 = Multimode PanMPO™ Female 8 = Multimode PanMPO™ Male</p> <p>7 – Connector Variant N = No variant</p> <p>8 – Connector Type End ‘B’ 7 = Multimode PanMPO™ Female 8 = Multimode PanMPO™ Male</p> <p>9 – Connector Variant N = No variant</p>	<p>10 – Construction/Performance A = Polarity A-Standard IL B = Polarity B-Standard IL X = Multimode Polarity A - Optimized IL Y = Multimode Polarity B - Optimized IL K = Multimode Polarity A - Ultra Low IL L = Multimode Polarity B - Ultra Low IL</p> <p>11 – Other N = No pulling eye</p> <p>12 – Unit of Length F = Feet M = Meters</p> <p>13, 14, 15 – Length 1 - 30m (LSZH) 3 - 100ft (Plenum)</p>
---	---	---

QuickNet™ PanMPO™ Interconnect Round Cable Assembly Detail

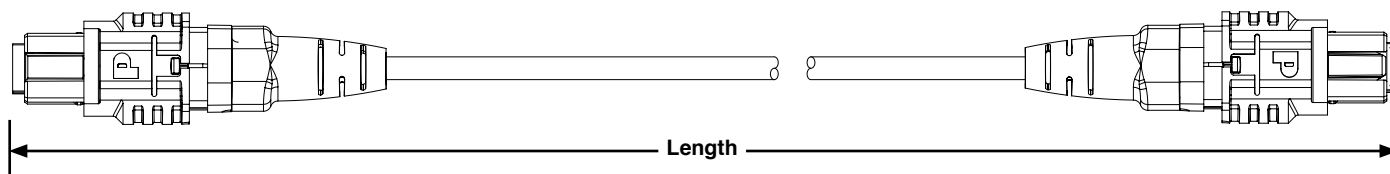

Other options are available as follows:

Fiber Types: OM1 62.5/125, OM2 50/125, OM3, OM4

Fiber Counts: 12-fiber

Jacket Type: LSZH and Plenum

Construction/Performance: Standard IL, Optimized and Ultra IL for multimode, Polarity (Method) A and Polarity (Method) B.

Please contact Panduit customer service for information on additional part number options.

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

©2018 Panduit Corp.
ALL RIGHTS RESERVED.
FBSP91--WW-ENG
11/2018

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fibre Optic Cable Assemblies](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[7-21002-9](#) [MDM-25SH006F-A174](#) [MDM-25SH011F-A174](#) [FA04390-50-M-72-LC-N](#) [MLB 501 V RED](#) [MLB 501 V YELLOW](#) [MLN 1002,5](#)
[RED](#) [1-3636-600-5208](#) [1-5018030-0](#) [2061529-7](#) [21055-6](#) [FXBSCSCE2LM002](#) [3000005](#) [3-21053-2](#) [MLB 200/1 V BLACK](#) [MLB 2001 V](#)
[RED](#) [MLB 2001 V YELLOW](#) [MLB 501 V BLACK](#) [5492011-6](#) [106284-7000](#) [5492011-5](#) [5492011-8](#) [5492011-9](#) [8-21007-5](#) [106386-4447](#)
[2123909-4](#) [106273-0629](#) [2125046-1](#) [2821236-3](#) [2821310-2](#) [2821310-3](#) [2821313-4](#) [FX2ERLNLNSNM0.5](#) [CF-980062-074](#)
[FCBG410QD3C10](#) [CF-901200-394](#) [CF-980062-073](#) [CF-980062-071](#) [CF-980062-075](#) [CF-980062-072](#) [17-300310-100](#) [2821236-2](#) [MIKROE-](#)
[3728](#) [FA04474](#) [1083665](#) [17-300870-23](#) [TCP-Q151B-NNE22](#) [1115533](#) [1115596](#) [1115617](#)