


NOTES:

1. CABLE ASSEMBLY (WITH CONNECTORS):
  - A. SEE SHEET 2 FOR PART NUMBER MATRIX.
  - B. CANNOT BE LESS THAN THE LENGTH SPECIFIED IN THE PART NUMBER.
  - C. THE MAXIMUM CABLE LENGTH IS NOT TO EXCEED 10cm (4") OVER SPECIFIED LENGTH FOR LESS THAN 10 METER; AND +1%/-0% GREATER THAN 10 METERS.
  - D. TIP TO TIP LENGTH IS MEASURED WITHOUT DUST CAPS INSTALLED.
  - E. PATCHCORD ROUTING CONFIGURATION IS "A" TO "B".
  - F. THIS DRAWING SHALL BE APPLICABLE TO ANY LENGTH PATCHCORD AS DESIGNATED BY THE PART NUMBER, WHERE M=METER.
2. TECHNICAL SPECIFICATIONS:
  - A. OPERATING TEMPERATURE RANGE IS FROM -10 C TO +60 C.
  - B. CONNECTORS ARE 'FOCIS' COMPLIANT.
  - C. CABLE ASSEMBLIES COMPLY WITH THE REQUIREMENTS OF TIA/EIA-568-C.3 OR EQUIVALENT IEC STANDARDS.
  - D. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
3. PACKAGING:
  - A. CABLE ASSEMBLY SHIPPED WITH DUST CAPS INSTALLED.
  - B. UNIT QUANTITY: 1 PATCHCORD/PIGTAIL PER BAG.

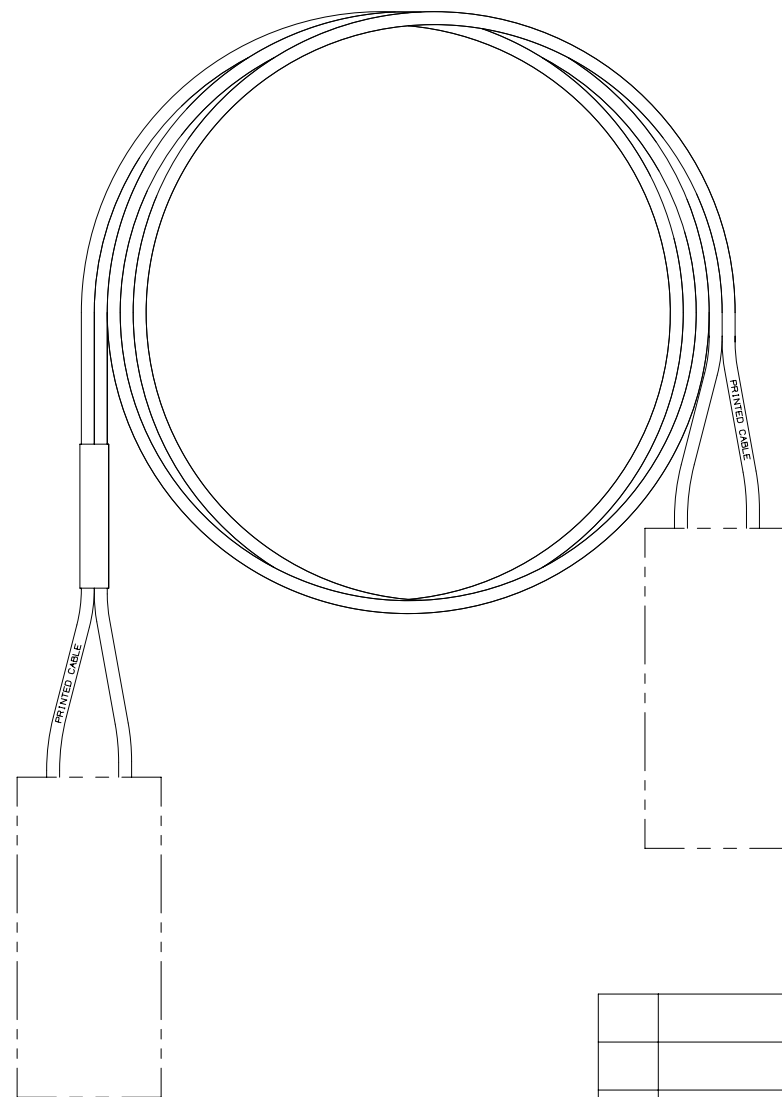


CONNECTOR INSERTION/RETURN LOSS SPECIFICATIONS						
CONNECTOR TYPE	MAXIMUM INSERTION LOSS (PER CONNECTOR)				MINIMUM RETURN LOSS (PER CONNECTOR)	
	SM (UPC)	STANDARD MM (PC)	OPTIMIZED MM (PC)	ULTRA-LOW (OM4 & OM4+)	SM (UPC)	MM (PC)
DUPLEX LC	0.35dB	0.25dB	0.15dB	0.10dB	55dB	26dB
DUPLEX SC	0.50dB	0.25dB	0.15dB	0.10dB	55dB	26dB
PUSH-PULL LC	0.35dB	0.25dB	0.15dB	0.10dB	55dB	26dB

						TITLE <b>JACKETED DUPLEX FIBER PATCH CORDS</b> CUSTOMER DRAWING	
						ITEM REVISION NAME M02779DX/00	
						DATASET FILE NAME M02779DX_DC/00B	
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ] .x : .03 [ .762 ]     .xxx : .005 [ .127 ] .xx : .01 [ .25 ]     ANGLES : 1 ° THIRD ANGLE PROJECTION	
01	07-06-16	SAT	RWD	MMN	B. ADDED (T)STD IL PAIR FLIPPED & (P)OPT IL PAIR FLIPPED. A. ADDED (R)RISER AND (L)LSZH TO 5th POSITION.		
00	01-06-16	SAT	RWB	RWB	RELEASED TO PRODUCTION	M02779DX-DC	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY: SAT    DATE: 01-04-16    CHK: RWB    SCALE: NONE SHT 1 OF 2    SIZE: B



DRAWING NUMBER:  
**M02779DX-DC**

## PANDUIT JACKETED FIBER PATCH CORD MASTER OPTIONS LIST

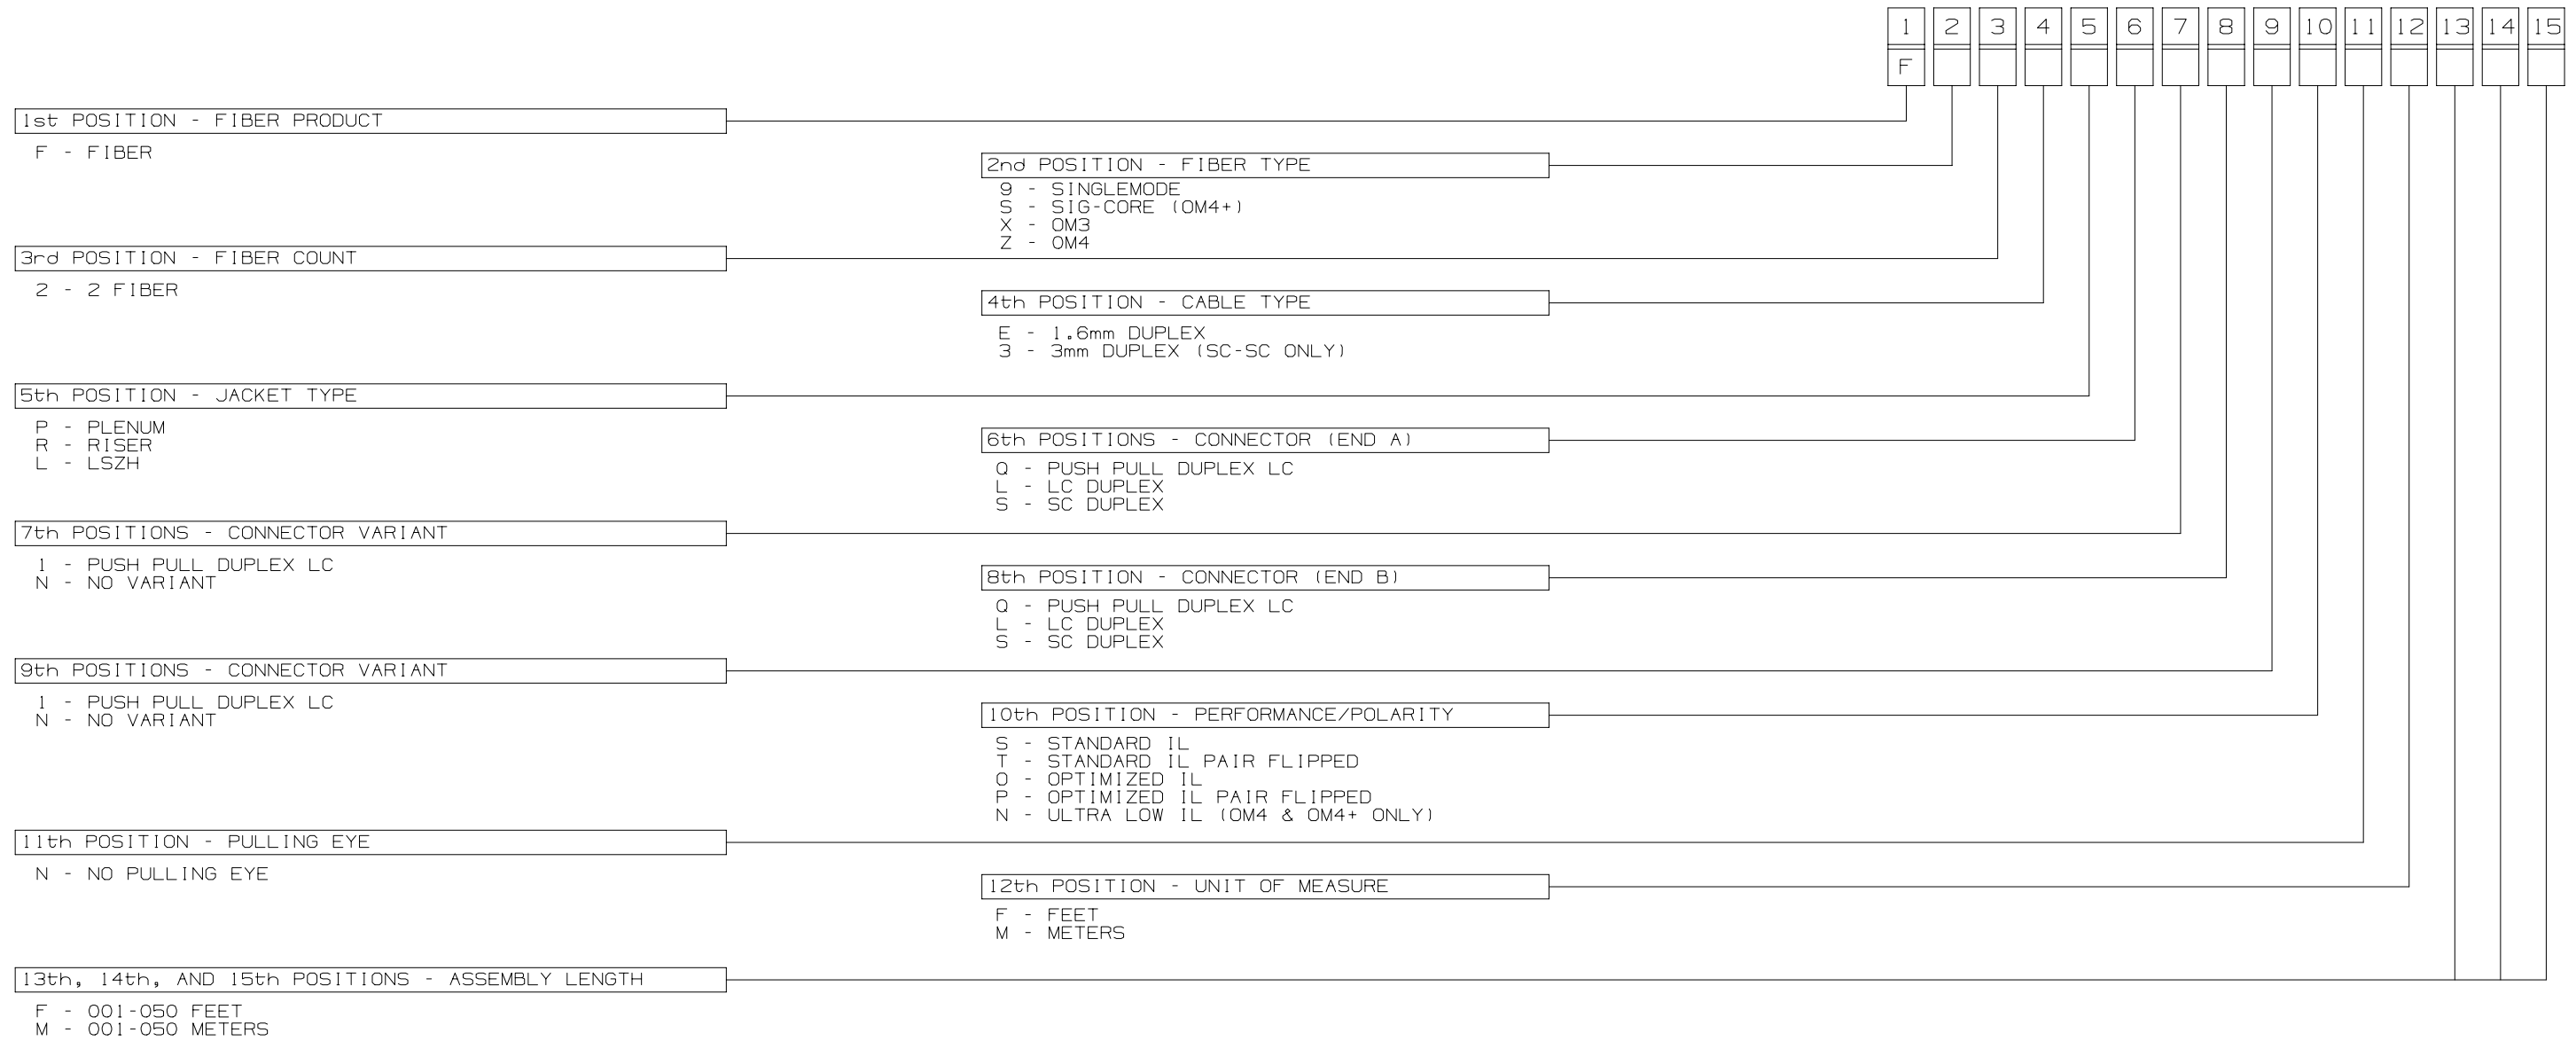

						TITLE <b>JACKETED DUPLEX FIBER PATCH CORDS</b> CUSTOMER DRAWING	
						ITEM REVISION NAME M02779DX/00	
						DATASET FILE NAME M02779DX_DC/00B	
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]	
						.x : .03 [ .762 ]    .xxx : .005 [ .127 ] .xx : .01 [ .25 ]    ANGLES : 1 °	
						THIRD ANGLE PROJECTION	
						THIRD ANGLE PROJECTION	
01 07-06-16 SAT RWB MMN SEE SHEET 1 FOR REVISION HISTORY.						M02779DX-DC	
						DRAWING NUMBER: <b>M02779DX-DC</b>	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	SCALE
							NONE
						DRAWN BY DATE CHK SCALE SAT 01-04-16 RWB NONE	
						SHT 2 OF 2	
						SIZE B	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fibre Optic Cable Assemblies](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[7-21002-9](#) [760-1518](#) [FA04390-50-M-72-LC-N](#) [MLB 501 V RED](#) [MLB 501 V YELLOW](#) [1-3636-600-5208](#) [2061529-7](#) [1-6693182-0](#)  
[1754898-1](#) [21055-6](#) [FXBSCSCE2LM002](#) [3000005](#) [3-21053-2](#) [MLB 200/1 V BLACK](#) [MLB 2001 V RED](#) [MLB 2001 V YELLOW](#) [MLB 501](#)  
[V BLACK](#) [5492011-6](#) [106284-7000](#) [5492011-5](#) [5492011-8](#) [5492011-9](#) [8-21007-5](#) [2123524-2](#) [2123524-1](#) [106386-4447](#) [DFSM-SCSC-2M](#)  
[2123909-4](#) [2123909-8](#) [106273-0629](#) [2125046-1](#) [2821236-3](#) [2821310-2](#) [2821310-3](#) [2821313-4](#) [FX2ERLNLNSNM0.5](#) [CF-980062-074](#) [CF-](#)  
[901200-394](#) [CF-980062-073](#) [CF-980062-071](#) [CF-980062-075](#) [CF-980062-072](#) [17-300310-100](#) [2821236-2](#) [2821313-1](#) [G-FC-FC-S-002.0-DX-](#)  
[A-18-Y](#) [G-E2A-E2A-S-003.0-SX-A-18-Y](#) [956-322-502214](#) [FA04474](#) [1083665](#)