


**Panduct® Type H – Hinged Cover Wiring Duct**
**Specifications**

- Material: Lead-free PVC
- UL Recognized continuous use temperature: 122°F (50°C)
- UL94 flammability rating of V-0
- Conforms with NFPA 79-2007 section 13.3.1 requirement for flame retardant material
- Provided with mounting holes
- Base and cover length is 6 feet

**Features and Benefits**

- Integrated hinged cover design allows easy access to wiring without hassle of removing and reinstalling cover
- Dual-sided hinge can open up to 100° from either sidewall of duct base for easy access to channel
- Cover retention flanges prevent cover from sliding when installed on duct base
- Double scoreline saves installation time and lowers installed cost
- Restricted slot design retains wire in slot for fast, easy wire installation or removal


Base Part Number	Duct Size (W x H)		Cover Part Number	Std. Pkg. Qty. (Ft.)	Base Ctn. Qty. (Ft.)	Cover Ctn. Qty. (Ft.)
	In.	mm				
<b>H1.5X2BL6</b>	1.75 x 1.98	44.5 x 50.3	<b>HC1.5BL6</b>	6	120	120
<b>H1.5X3BL6</b>	1.75 x 3.06	44.5 x 77.7	<b>HC1.5BL6</b>	6	120	120
<b>H2X2BL6</b>	2.17 x 1.98	55.1 x 50.3	<b>HC2BL6</b>	6	120	120
<b>H2X3BL6</b>	2.17 x 3.06	55.1 x 77.7	<b>HC2BL6</b>	6	60	120
<b>H2X4BL6</b>	2.17 x 4.10	55.1 x 104.1	<b>HC2BL6</b>	6	60	120
<b>H3X3BL6</b>	3.25 x 3.06	82.6 x 77.7	<b>HC3BL6</b>	6	60	120
<b>H3X4BL6</b>	3.25 x 4.10	82.6 x 104.1	<b>HC3BL6</b>	6	60	120
<b>H4X4BL6</b>	4.25 x 4.10	108.0 x 104.1	<b>HC4BL6</b>	6	60	60

For other colors replace BL (Black) with LG (Light Gray) or WH (White).

Order number of feet required, in multiples of 6' or Standard Carton Quantity.

Base and cover sold separately.

Height dimension includes duct with cover.

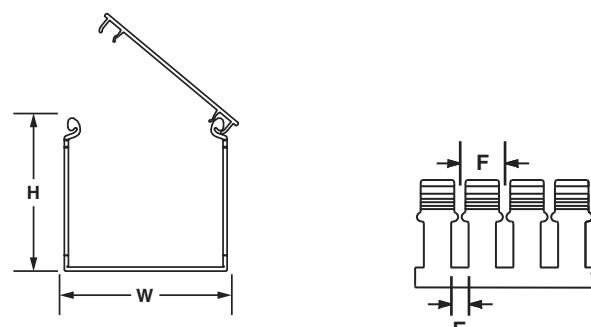

	<b>E</b>	<b>F</b>
For 2" Duct Height:	0.31" (7.9)	0.80" (20.3)
3" to 4" Height:	0.31" (7.9)	1.00" (25.4)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Wire Ducting](#) category:***

***Click to view products by [Panduit manufacturer:](#)***

Other Similar products are found below :

[66200A-10](#) [CVED32VEPG](#) [CVED40VEPG](#) [F512D5-5F140Y](#) [F512D5-5F200Y](#) [F512D5-5F26Y](#) [F512D5-5F30Y](#) [F512D5-5F33Y](#) [F512D5-5F34Y](#) [F512D5-5F45Y](#) [F512D5-5F50Y](#) [F512D5-5F54Y](#) [F512D5-5F66Y](#) [F512D5-5F70Y](#) [F512D5-5F75Y](#) [F512D5-5F90Y](#) [F612D5-5F100Y](#) [F612D5-5F130Y](#) [F612D5-5F50Y](#) [F612D5-5F56Y](#) [F612D5-5F58Y](#) [F6L12D5-5F46](#) [F912D5-5F11Y](#) [F912D5-5F170Y](#) [F912D5-5F175Y](#) [F912D5-5F230Y](#) [F912D5-5F300Y](#) [F912D5-5F55Y](#) [F912D5-5F56Y](#) [F912D5-5F63Y](#) [F912D5-5F6Y](#) [F912D5-5F75Y](#) [F912D5-5F85Y](#) [F912D5-5F86Y](#) [F912D5-5F88Y](#) [F912D5-5F96Y](#) [FAP0047WBLMTP](#) [FAP12WBRDRDDLCZ](#) [FAP12WDYLYLDLCZ](#) [FAP12WEORORDLCZ](#) [FAP6WEORORDLCZ](#) [FAP6WFDBDBDLCZ](#) [FAP8WEORORDLCZ](#) [FCE2UWCL](#) [800A-LB](#) [802A-ECSP](#) [802I-ICSP](#) [FJQADH](#) [FJQFXT](#) [PED10](#)