HDBaseT Extenders and HDMI Patch Cords



specifications

The HDBaseT extenders shall extend an HDMI, RS232 signal, and power over 70m/230ft of Category 6 or 6A cable. A two-gang wall plate transmitter and a slim-line box transmitter shall be available and compatible with both a standard receiver and a receiver with audio extraction (audio de embedding). HDMI patch cords meet the 2.0 specification and are recommended for use in the HDBaseT channel in conjunction with Panduit copper cable and connectivity.



technical information

Mounting:	Mounting brackets and screws included with box units
Power:	24V1A DC Power Supply Included with all Receivers and Slim Line Box transmitter
IR Emitter:	Included with all Receivers and Slim Line Box transmitter
Video Bandwidth:	297MHz (10.2Gbps)
Color Space:	RGB, YCbCr 4:4:4, YCbCr 4:2:2
Transmission Distance over Cat 6 or Cat 6A Cable:	40 Meters: 1080P @60Hz@48bit 1080P @120Hz@24bit 3D1080P @ 60Hz@36bit 4K x 2K @30Hz@24bi 70 meters: 1080P@60Hz 36bit 3D1080P@30Hz 36bit
Housing:	Metal Enclosure
Color:	Black (boxes) White (wall plate)
Box Dimensions:	65mm x 115mm x 17mm (boxes)
Wall plate dimensions:	116mm x 114mm x 39mm (wallplate)
Weight:	200g (boxes), 220 g (wall plate)
Power Supply:	Input: AC100- 240V 50/60Hz Output: DC 24V/1A (US/EDU standards, CE/FCC/UL certified)
Power Consumption:	6W
Operating Temperature:	32-104 F, 0-40C
Storage Temperature:	-4 -140F/ -20-60 C
Relative Humidity:	20-90% RHPackage tested to ISTA Procedure 1A

key features and benefits

Video Specifications	HDMI 1.4b, HDCP 2.2 and 1.4, EDID 1.4
Video Resolutions	Up to 4K2K@30Hz
Audio	Up to 7.1 channels of High Definition audio pass through (LPCM, Dolby TrueHD, and DTS-HD Master Audio)
HDR	10 bits High Dynamic Range pass through
HDMI HBR	Supports HDMI High Bit Rate audio pass through
Power	Power over cable is supported (either Tx or Rx is powered by 24V@1A power supply)
Autoswitching	Wall plate transmitter supports auto-switching between sources, comes pre- programmed
HDMI Certification	HDMI patch cords are certified HDMI 2.0 compliant

applications

HDBaseT extenders can be used with a copper channel where HDMI signal extension is required. HDBaseT extenders are compatible with all RJ45 plugs and HDMI certified cables. HDBaseT extenders may be used with Category 6 or 6A cabling. HDBaseT extenders are commonly deployed in classrooms, conference rooms and digital signage applications. Both the wallplate and box transmitters are compatible with the receivers with and without audio de-embedding. Audio de-embedding is commonly used in applications with speaker systems external to the monitor or projector. HDBaseT transmitters are compatible with HDBaseT projectors with the same specifications listed above.

www.panduit.com

HDBaseT Extenders

Slim Line Box Transmitter:

CMHDBTBTX

Wall Plate

Transmitter: **CMHDBTWPTX**

Slim Line Box

Receiver: **CMHDBTBRX**

Slim Line Box Receiver with

Audio De-embedding: CMHDBTWRX

HDMI Patch Cords

1 Meter HDMI

Patch Cord: HDMI1MBL^

2 Meter HDMI

Patch Cord: HDMI2MBL^

4 Meter HDMI

Patch Cord: HDMI4MBL^

AV In-Wall Boxes

A/V In-Wall Box,

Small: **CMBBSWH**

A/V In-Wall Box,

CMBBLWH Large:

A/V In-Wall Box,

Cable Ring: **CMBBCMR**

A/V In-Wall Box,

Equipment Bracket: **CMBBRKT**

Mini-Com® UTP Jack Modules

Category 6 Category 6 UTP

Jack Module:

CJ688TGBU

Category 6A

Category 6A UTP

Jack Module: CJ6X88TGBU 48-port, 2 RU: DP48688TGY

TX6A™ Category 6A UTP Field Term RJ45 Plug

Category 6/6A UTP

Field Term Plug: FP6X88MTG

TX6™ PLUS UTP Patch Cords

Category 6 UTP:

UTPSP3Y*

TX6A-28™ Category 6A 28 AWG **UTP Patch Cords**

Category 6A

28 AWG:

UTP28X3*

TX6A™ 10Gig™ UTP Copper Cable with Advanced MaTriX Technology


Category 6A (riser): PUR6AM04BU-CG

^Part numbers listed in BL (Black). For part numbers in White, replace "BL" with "WH".


*Add length and color as suffix to part number.

HDBaseT Slim-Line Extenders and HDMI Patch Cords

Channel Drawing




IR Channel Drawing




dimensions


CMHDBTBRX- HDBaseT Receiver Box

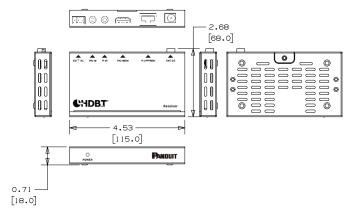


CMHDBTBTX- HDBaseT Transmitter Box



CMHDBTWPTX- HDBaseT Wallplate Transmitter



CMHDBTWRX- HDBaseT Receiver Box with Audio De embedding



WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK cs-emea@panduit.com Phone: 44.20.8601.7200 PANDUIT SINGAPORE PTE. LTD. Republic of Singapore cs-ap@panduit.com Phone: 65.6305.7575 PANDUIT JAPAN Tokyo, Japan cs-japan@panduit.com Phone: 81.3.6863.6000 PANDUIT LATIN AMERICA Guadalajara, Mexico cs-la@panduit.com Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia cs-aus@panduit.com Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty



Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com or by phone: 800.777.3300

© 2018 Panduit Corp. ALL RIGHTS RESERVED. OTSP55--SA-ENG 2/2018



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for HDMI Cables category:

Click to view products by Panduit manufacturer:

Other Similar products are found below:

426301400-3 68767-0003 CA-MINIDP-HDMIF-10FT HP-19AFMM-SL7A01 HP-19AFMM-SL7A05 S-HDI-DVI-2 S-HDI-DVI-5 10HM15128-01 HD0003 31888 31889 31893 31897 31908 31911 31913 31914 31915 31919 31920 31921 31923 31925 31926 31929 31930
31932 31935 31936 31937 31938 CV0036B CV0038 CV0057B CV0058 CV0058B CV0059B 50580 50581 50582 50989 51579 51586
51724 51957 52859 31890 31891 31892 31894