


# IndustrialNet™ Category 6 S/FTP Copper Cable

## specifications

Category 6 S/FTP copper cable shall meet or exceed the IEC 61156-6 and ANSI/TIA-568-C.2 Category 6 standards up to 80 meters.

The stranded copper conductors shall be 24/7 AWG with foamed polyethylene (PE) insulation. The copper conductors shall be twisted in pairs. Each of the four pairs shall be surrounded by an overall metallic foil. All four pairs shall then be surrounded by an overall braided shield and covered with a polyurethane (PUR) jacket. The jacket shall be oil, ozone, and abrasion resistant for enhanced chemical resistance and mechanical performance. The jacket shall be flame retardant and halogen-free for industrial Ethernet applications. The cable shall support high flex and torsion applications.



## technical information

<b>Electrical performance:</b>	Certified component performance up to 80 meters and exceeds the requirements IEC 61156-6 and ANSI/TIA-568-C.2 Category 6 at swept frequencies up to 250 MHz
<b>Standard compliances:</b>	Flexure IEC 61935-2 Flex Life Test: 1 million cycles at 10x cable diameter; 10 million cycles at 20x cable diameter Torsion Life Test: 3 million cycles, 360° Ozone resistance VDE 0805 Oil resistance EN 60811-2-1 (7 days x 24hrs/90°C)
<b>Conductors/insulators:</b>	Four pairs of 24/7 AWG stranded copper insulated with foamed polyethylene
<b>Insulation diameter:</b>	1.38 – 1.48mm (0.054 – 0.058 in.)
<b>Flame rating:</b>	Flame retardant, halogen-free – IEC 60332-1-2, IEC 60754-1; EN50575: Euroclass Eca
<b>Installation tension:</b>	80 N (18 lbf) maximum
<b>Temperature rating:</b>	-40°C to 80°C (-40°F to 167°F) during transport, installation, and operation
<b>Cable jacket:</b>	Polyurethane (PUR), oil, ozone, and abrasion resistant
<b>Cable diameter:</b>	8.0mm (0.315 in.) nominal
<b>Cable weight:</b>	30 kg/500m (66 lbs /1640 ft.)
<b>Packaging:</b>	Packaged 500 meters (1640 feet) on a reel Package tested to ISTA Procedure 1A

## key features and benefits

<b>Third party tested</b>	Cable has been tested by an independent laboratory and complies with the electrical standard requirements of IEC 61156-6 and ANSI/TIA-568-C.2 Category 6 standards
<b>Reliability</b>	Shielded S/FTP cable construction protects against environmental elements that can cause electrical performance failures; stranded conductors for standard flex applications and ease of installation; cable jacket shall be oil, ozone, and abrasion resistant for enhanced chemical resistance and mechanical performance
<b>Descending length cable markings</b>	Easy identification of remaining cable reduces installation time and cable scrap
<b>Packaged on a reel</b>	Ensures proper performance and provides quick installation

## applications

IndustrialNet™ Category 6 S/FTP Copper Cable provides reliability and high performance as an integral component of the end-to-end solution for industrial Ethernet and Ethernet/IP based communications networks. The 4-pair high performance cable ensures highest availability in conditions seen in industrial environments. The cable incorporates a durable PUR jacket for use in installations requiring cable with a halogen-free rating.

Key applications include:

- 10BASE-T (Ethernet)
- 100BASE-T (Fast Ethernet)
- 1000BASE-T (Gigabit Ethernet)
- Industrial Ethernet
- Ethernet/IP
- Downlinks from control panel to the machine area
- Uplinks featuring gigabit data transmission from the control panel to the consolidation point

### IndustrialNet™ Category 6 S/FTP Copper Cable

**Flame retardant, halogen-free  
4-pair:** ISX6004A\*-LED

### IndustrialNet™ Category 6/5e RJ45 Field Terminable Plug

**Field  
terminable plug:** ISPS688FA

### IndustrialNet™ Category 5e Shielded 600 V-Rated Patch Cords

**CM/CMX:** \*\*ISTPHCH1MTL

### IndustrialNet™ M12 D-Code to RJ45 Panel Mount Adapter

**Panel  
mount adapter:** ICAM12DRJS

### Mini-Com® Modular Patch Panel

**8-port:** CDPP8RG

### DIN Rail Adapter

**1-port:** CADIN1IW\*\*\*

\*To designate color, add suffix YL (Yellow), or RD (Red).

\*\*For other lengths, change the length designation (1M) of the part number to the desired length (0.3M, 0.6M, 2M, 3M, 5M, or 10M); to designate color, replace TL (Teal) suffix with BL (Black), RD (Red), or YL (Yellow). For example, the part number for a 2-meter teal patch cord is ISTPHCH2MTL.


\*\*\*For standard colors other than Off White, replace IW in part number with BL (Black), EI (Electric Ivory), IG (International Gray), or WH (White).

# IndustrialNet™ Category 6 S/FTP Copper Cable

## additional specifications

Mechanical Test	
Ultimate Breaking Strength	>400 N (90 lbf.)
Minimum Bend Radius	8x cable diameter
Electrical Test	
Nominal Velocity of Propagation (NVP)	74%
Operating Voltage, maximum	80V

## cable construction

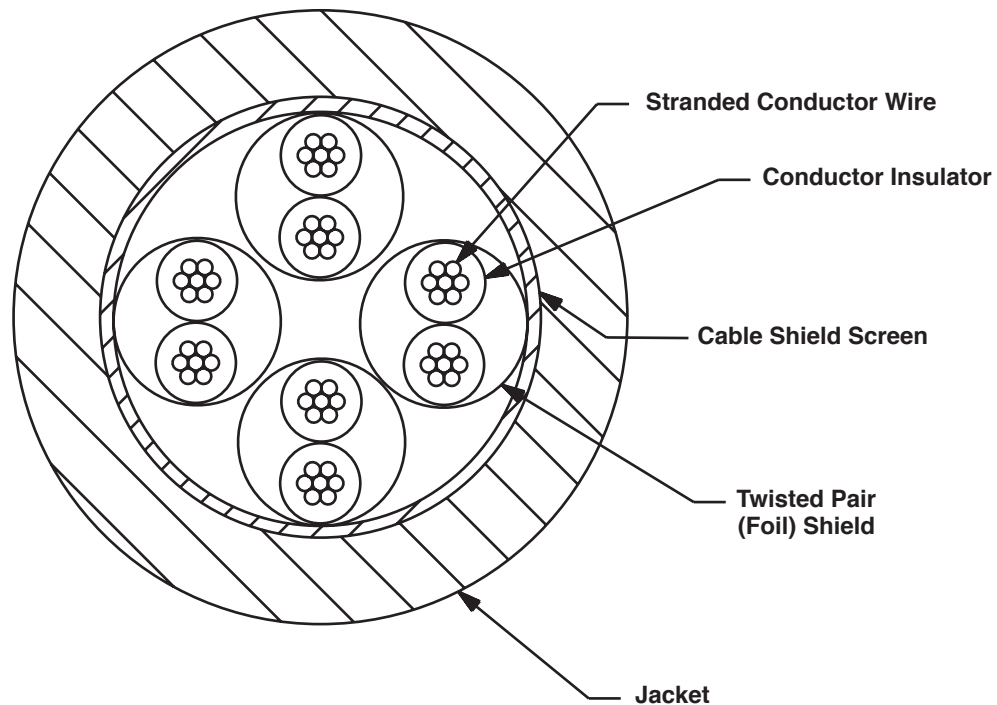

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

[iai@panduit.com](mailto:iai@panduit.com)

**PANDUIT**®

©2018 Panduit Corp.  
ALL RIGHTS RESERVED.  
COSP342--WW-ENG  
4/2018

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multi-Conductor Cables](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[89182-010-1000](#) [89705-008-500](#) [6000FE-877-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [M3905-BK005](#)  
[6502FE 8771000](#) [6541PA-008-U1000](#) [CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-](#)  
[0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#)  
[82841-877-5000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469](#)  
[060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-](#)  
[500](#) [8780-060-1000](#) [8782-001-U1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#) [9497 0001000](#) [9515-060-](#)  
[1000](#)