

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube			
Plating	Electro-Tin			
Wire Size	1 AWG			
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric			
Wire Strip Length	1-7/16 in.			
Stud Size	1/2 in.			
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.			
UL Temperature Rating	90° C			
C.S.A Certified Wire Connector	Yes			
Panduit Color Code on Barrel	GREEN			
Panduit Die Index No. on Barrel	P37			
Alternate Industry Die Index No. () on Barrel	(11)			





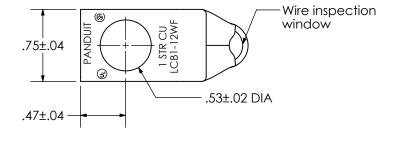

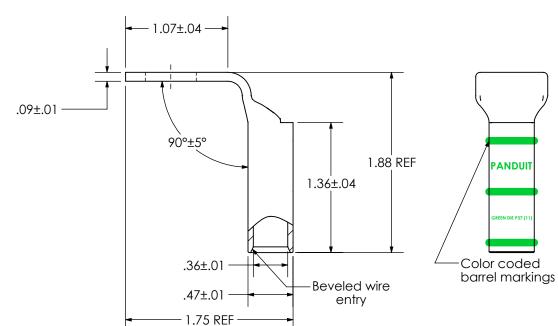

REV	DATE	BY	СНК	DESCRIPTION	ECN	-R	SUP	SCALE N/A
00	4/17	JHNU	JHNU	DRAWING RELEASED	019765	RGB	RGB	Copper Lug -
								Copportug
								ZAVIL



LCB1-12WF-E - One-Hole, Long Barrel with Window, 90° Angle Tongue

DRAWING NO / CAD FILE

LCB1-12WF-CUST

REEN DIE P37 (1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Terminals category:

Click to view products by Panduit manufacturer:

Other Similar products are found below:

HT-13-10 71M-250-32-NB 01-2065-1-0216 00581P0075 M10-10RX M10BCK 60205-1 604200-1 60598-1-CUT-TAPE 60617-1-C 60873-1 M14-516R/SK M14-6RSX M18-10FLX M18-8FBX M18-8R/LX M18BCK 61314-6-C 61-S 61-SN 61-SN-A 62-NBM-A 62-SN 62-SP 63-S 640179-1 640917-2-CUT-TAPE 6501550002 66107-2-C 66107-4-C 696683-1 696834-1 696861-1 696931-1 696999-1 M8-516RK M86700006 MA250DMFMX-A 701-2007 701-2307 701-7761-03 70F-110-32-PB 718-N-A 71M-187-20-NBL 71M-250-32-NBL 72F-187-20-NBL 72M-250-32-NBL 7310 73F-250-32 73F-250-32-NBL