

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENT	TAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube			
Coating	Clear Coating			
Wire Size	2/0 AWG			
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric			
Wire Strip Length	1-9/16 in.			
Stud Size	1/2 in.			
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.			
	UL Listed per UL467 for grounding and bonding and suitable for direct burial in earth or concrete.			
UL Temperature Rating	90°C			
C.S.A Certified Wire Connector	N/A			
Panduit Color Code on Barrel	BLACK			
Panduit Die Index No. on Barrel	P45			
Alternate Industry Die Index No. () on Barrel	(13)			





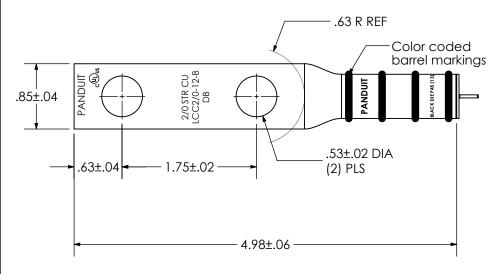

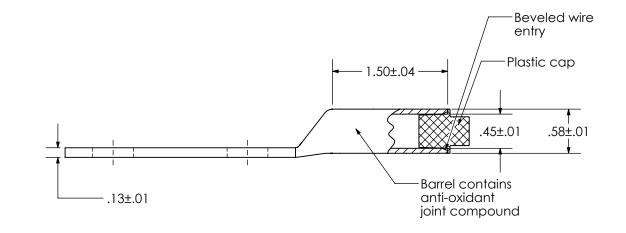

								CORP. TINLEY PARK, ILLINOIS
00	3/16	JHNU	RGB	DRAWING RELEASED	00076FBD- LCC2/0-12-B-CUST	RGB	RGB	LCC2/0-12-B-X Copper Lug - Two-Hole, Long Barrel, Direct Burial
REV	DATE	BY	СНК	DESCRIPTION	ECN	-R	SUP	SCALE N/A DRAWING NO / CAD FILE LCC2_0-12-B-CUST

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Wire Ducting & Raceways category:

Click to view products by Panduit manufacturer:

Other Similar products are found below:

```
800A-LB 801I-LSP 802A-ECSP 802I-ICSP 923223-000 PRAF6WH-X A0405538 1301150342 1301160034 1301170070 1301180011 1301230083 1301230153 1301240273 1301250006 1302261238 1302261321 1302262552 1302263103 1302263178 1302263259 1302263816 1302263860 1302264375 1302264390 1301150343 1301160030 1301170050 1301170051 1301170061 1301180013 1301230086 1301230130 1301240054 1302260055 1302260376 1302261343 1302261344 1302262674 1302263095 1302263166 1302263209 1302263513 1302263851 1302263870 1302264137 1302264218 DD1/J AX102007 AX102411
```