

## specifications

Structured rack grounding kits shall be TIA-942 compliant, listed for their purpose with a nationally recognized testing laboratory, and RoHS compliant. Grounding strip and connectors shall be tin plated. Grounding strip shall comply with EIA universal mounting hole spacing and mount to standard 19 inch and 23 inch racks. All components shall be bonded to the rails with paint piercing hardware. Electrostatic discharge (ESD) ports shall be mounted to the front and back of the rack. Equipment shall be bonded to the grounding strip with a discrete jumper and two-hole long barrel compression lugs. There shall be a #6 AWG copper code discrete jumper that terminates on the mesh common bonding network (MCBN) with a compression HTAP and attaches to the grounding strip using a two-hole, long barrel compression lug. The compression lugs shall meet NEBS Level 3 Criteria and have inspection windows. All jumpers shall have green-and-yellow VW-1 rated insulation. Where rack sections bolt together, paint piercing grounding washers shall be used on both sides, under the head of the bolt and between the nut and the rack.



## technical information

<b>Performance level:</b>	TIA-942 Compliant, UL Listed, CSA Certified, RoHS Compliant
<b>Packaging:</b>	Common bonding network (CBN) jumper kit is supplied with one copper compression HTAP, thread-forming screws, and antioxidant Grounding strip kits are supplied with thread-forming screws, grounding sticker, and antioxidant Equipment jumper kits are supplied with thread-forming screws and antioxidant Surge suppressor jumper kit is supplied with thread-forming screws and antioxidant ESD port kit is supplied with thread-forming screws, one ESD protection sticker, and antioxidant Paint-piercing grounding washer kit is supplied with antioxidant

## key features and benefits

<b>Engineered to meet TIA-942</b>	Provides a dedicated, low resistance, and visually verifiable ground system to maintain system performance, protect network equipment, and maximize uptime
<b>Paint-piercing components and thread-forming screws</b>	Eliminates the need to manually remove paint from the rack, saves labor and cost and minimizes metal shavings
<b>Flexible design</b>	Can be installed on new and existing 19 inch and 23 inch racks that meet EIA-310-D; allows up to 45 rack units to be grounded
<b>Complete system of matched components</b>	Saves labor and cost by making it easy to select components and kits for the particular rack grounding scenario

## applications

Because data center racks are typically painted and bolted together, electrical continuity throughout the rack is not assured. PANDUIT® STRUCTUREDGROUND™ Grounding System Kits provide a modular solution for properly grounding racks. Paint-piercing grounding washers are available to provide continuity between frame members. Thread-forming screws are supplied with the rack grounding kits to provide a bond

between the grounding strip and the rack by removing paint from thread holes and minimizing metal shavings. The grounding strip can be connected to the raised floor or overhead system ground using the common bonding network (CBN) jumper. Network equipment is bonded to the grounding strip using available equipment jumpers and paint piercing hardware.

For the complete STRUCTUREDGROUND™ Grounding System offering, refer to [www.panduit.com/dcgrounding](http://www.panduit.com/dcgrounding).

[www.panduit.com](http://www.panduit.com)

### Common Bonding Network (CBN) Jumper Kit



Factory terminated on one end, 60" (1.52m) L, #6 AWG (16mm²), #6 – #2 AWG (16 – 35mm²) HTAP: RGCBNJ660P22

### Grounding Strip Kits



1 strip: RGS134-1Y  
10 strips: RGS134-10-1Y

### Equipment Jumper Kits



#6 AWG (16mm²), factory terminated on both ends  
24" (.61m) L, 45° bent: RGEJ624PHY  
24" (.61m) L, 90° bent: RGEJ624PFY  
#6 AWG (16mm²), factory terminated on one end  
57" (1.45m) L, 90° bent: RGEJ657PFY

### Surge Suppressor Jumper Kit



#10 AWG (6mm²), factory terminated on both ends: SSGK-1

### Electrostatic Discharge (ESD) Port Kit

Two-Hole: RGESD2-1

### Paint-Piercing Grounding Washer Kit (3/8" [M8] stud hole)

100 washers: RGW-100-1Y

### Bonding Screws

#12 – 24 x 1/2": RGTBSG-C

### Thread-Forming Screws

#12 – 24 x 1/2": RGTS-CY

### Slotted Copper Compression Lugs (1/2" – 5/8" [12.7 – 16mm] stud hole spacing)



#6 AWG (16mm²), straight: LCC6-14JAW-L  
#6 AWG (16mm²), 45° bent: LCC6-14JAWH-L  
#6 AWG (16mm²), 90° bent: LCC6-14JAWF-L

### Related Products

#### Standard Racks

**Aluminum**  
84" (2.13m) H, 19" (.48m) W, 3" (.08m) D: CMR19X84  
47" (1.19m) H, 19" (.48m) W, 3" (.08m) D: CMR19X47  
84" (2.13m) H, 23" (.58m) W, 3" (.08m) D: CMR23X84

**Steel**  
47" (1.19m) H, 19" (.48m) W, 3" (.08m) D: CMR19X84S

#### NETFRAME® Rack System

86" (2.18m) H, 28.4" (.72m) W, 6" (.15m) D: NFR84


Hardware is also available for mounting to cage nut, thru-hole, M5 and M6 rails.

Paint-piercing grounding washers are included with PANDUIT Standard and NETFRAME® racks.

# STRUCTUREDGROUND™ Grounding System Kits for 2 Post Racks


## Paint-Piercing Grounding Washer Kit

— Provides a superior bond between frame members; serrations eliminate the need to scrape paint




## Electrostatic Discharge (ESD) Port Kit

— Bent 45° acts as a hook to hold ESD wrist strap




## Grounding Strip Kit

— Provides a bond between the grounding strip and rack, eliminating the need to scrape paint




## Equipment Jumper Kit

— Bonds network equipment to the grounding strip or grounding busbar



## Surge Suppressor Jumper Kit

— Bonds power or data line surge suppressor to grounding strip or grounding busbar




## Common Bonding Network (CBN) Jumper Kit

— Connects grounding strip or grounding busbar to MCBN in underfloor and overhead grounding applications



## Bonding Screw

— Patent pending, bonds equipment and patch panels to the front of the rack

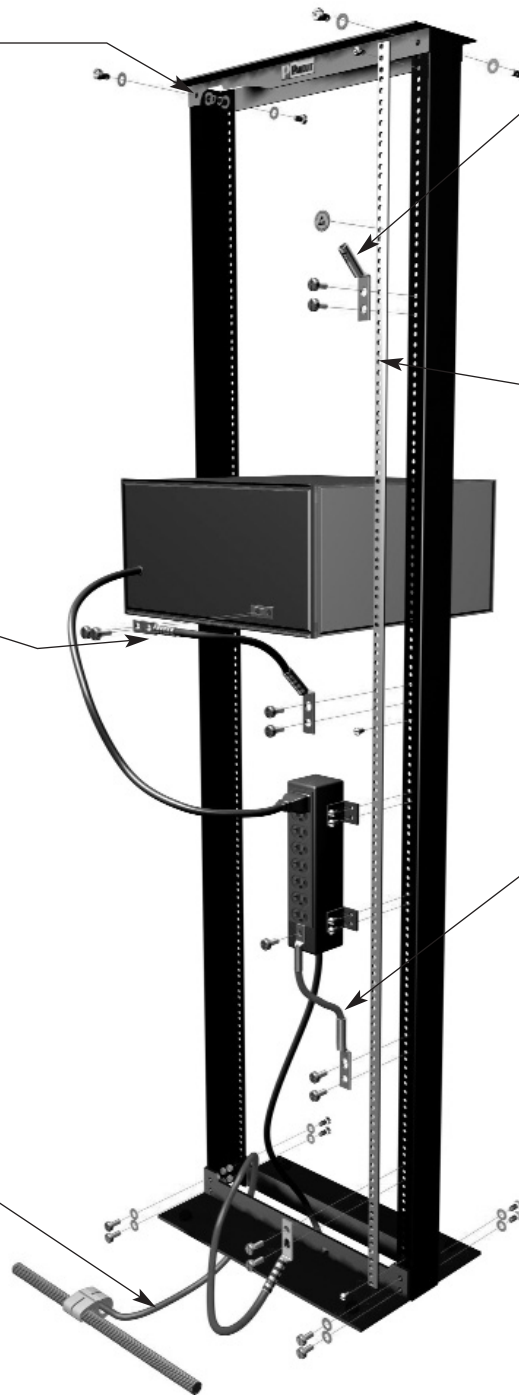

## WORLDWIDE SUBSIDIARIES AND SALES OFFICES

**PANDUIT CANADA**  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

**PANDUIT EUROPE LTD.**  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

**PANDUIT SINGAPORE PTE. LTD.**  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6379.6700

**PANDUIT JAPAN**  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.3767.7011

**PANDUIT LATIN AMERICA**  
Jalisco, Mexico  
cs-la@panduit.com  
Phone: 52.333.777.6000

**PANDUIT AUSTRALIA PTY. LTD.**  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of PANDUIT product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800-777-3300 and reference PCSP04

©2007 PANDUIT Corp.  
ALL RIGHTS RESERVED.  
Printed in the U.S.A.  
SA-PCSP04  
Replaces SA-PCSP02  
3/2007



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wire Ducting & Raceways](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[800A-LB](#) [801I-LSP](#) [802A-ECSP](#) [802I-ICSP](#) [923223-000](#) [PRAF6WH-X](#) [A0405538](#) [1301150342](#) [1301160034](#) [1301170070](#) [1301180011](#)  
[1301230083](#) [1301230153](#) [1301240273](#) [1301250006](#) [1302261238](#) [1302261321](#) [1302262552](#) [1302263103](#) [1302263178](#) [1302263259](#)  
[1302263816](#) [1302263860](#) [1302264375](#) [1302264390](#) [1301150343](#) [1301160030](#) [1301170050](#) [1301170051](#) [1301170061](#) [1301180013](#)  
[1301230086](#) [1301230130](#) [1301240054](#) [1302260055](#) [1302260376](#) [1302261343](#) [1302261344](#) [1302262674](#) [1302263095](#) [1302263166](#)  
[1302263209](#) [1302263513](#) [1302263851](#) [1302263870](#) [1302264137](#) [1302264218](#) [DD1/J](#) [AX101472](#) [AX102007](#)