


# NetKey® Category 6A Punchdown Jack Module

# PANDUIT®

DATA SHEET

## specifications

Category 6A/Class E<sub>A</sub>, 8-position keystone jack module shall terminate unshielded twisted 4-pair, 22 – 26 AWG, 100 ohm cable. Punchdown tool properly terminates each conductor for optimum performance. Universal label is color-coded T568A and T568B wiring schemes.



## technical information

<b>Category 6A/Class E<sub>A</sub> channel and component performance:</b>	Exceeds ANSI/TIA-568-C.2 Category 6A and ISO 11801 Class E <sub>A</sub> channel requirements at swept frequencies up to 500 MHz Exceeds ANSI/TIA-568-C.2 and ISO 11801 Class E <sub>A</sub> standards at swept frequencies up to 500 MHz
<b>FCC compliance:</b>	Complies with ANSI/TIA-1096-A (formerly FCC Part 68); contacts plated with 50 microinches of gold for superior performance
<b>IEC compliance:</b>	Meets IEC 60603-7
<b>PoE compliance:</b>	Supports IEEE 802.3af/802.3at and proposed 802.3bt type 3 and type 4 PoE applications
<b>Safety compliance:</b>	cULus Listed; UL 1863 and CAN/CSA-C22.2 (UL File E129886)
<b>RoHS compliance:</b>	Compliant

## key features and benefits

<b>100% performance tested</b>	Confidence that each jack module delivers specified performance
<b>110 style punchdown termination</b>	Utilizes industry standard termination style and includes wire retention cap
<b>Modular</b>	Universal keystone jack modules snap in and out of all NetKey® Faceplates, Modular Patch Panels, and Surface Mount Boxes for fast moves, adds, and changes
<b>Individually serialized</b>	Marked with quality control number for future traceability
<b>Convenience packaging (optional)</b>	25 jacks packaged in one easy to open container, eliminating the time to open each individual package and reducing on-site waste; ideal for high volume installations

## applications

NetKey® Category 6A Punchdown Jack Modules provide a cost effective medium for ensuring that network bandwidth needs are easily met today and tomorrow. The NetKey® Solution helps organizations efficiently and reliably meet data transmission needs.

With certified performance to ISO 11801 and ANSI/TIA-568-C.2 Category 6A component standards, this system will support high bandwidth applications such as those required by education, healthcare, finance, and banking.

### NetKey® Category 6A Jack Module

**Module:** NK6X88M\*  
**Bulk pack of 24 jack modules:** NK6X88M\*-Q

### Termination and Cable Prep Tools

**Punchdown tool:** PDT110‡  
**Punchdown base:** NKSPB  
**JackRapid<sup>+</sup>**  
**Termination Tool:** JR-PAN-2‡‡  
**Cable stripping tool:** CWST  
**Cable stripping tool:** CJUST

\*To designate a color, add suffix IW (Off White), EI (Electric Ivory), IG (Int'l Gray), WH (White), BL (Black), OR (Orange), RD (Red), BU (Blue), GR (Green) or YL (Yellow).

‡Terminates the NetKey® Keystone Punchdown Jack Module and NetKey® Patch Panel.

‡‡Terminates the NetKey® Keystone Punchdown Jack Module. Fluke JackRapid<sup>+</sup> Termination Tool available through distribution. To locate the local office, visit [www.flukenetworks.com/contact](http://www.flukenetworks.com/contact).  
\*JackRapid is a trademark of Fluke Networks.




# NetKey® Category 6A Punchdown Jack Module

## Test Results

Mechanical Test	Test Method	Measurement	Typical Test Results
<i>Normal Force</i>	—	Load (grams)	>100
<i>Vibration</i>	IEC 512-6d	Circuit Resistance (mOhms)	<40
<i>Shock</i>	IEC 512-6c	Contact Disturbance (microseconds)	<5
<i>Durability</i>	IEC 512-9a	Circuit Resistance (mOhms)	<40
<i>Mating/Un-Mating</i>	IEC 512-13b	Mating Force (N)	<20
		Un-Mating Force (N)	<20
<i>Termination Cycles</i>	IEC 352	Number of Cycles	<20

Electrical Test	Test Method	Measurement	Typical Test Results
<i>Low Level Circuit Resistance</i>	IEC 512-2a	Resistance (mOhms)	<20
<i>Dielectric Withstand Voltage</i>	IEC 512-4a	1000 V, 1 minute	Passed
<i>Insulation Resistance</i>	IEC 512-3a	Resistance (mOhms)	>500

Environmental Test	Test Method	Measurement	Typical Test Results
<i>Temperature Life</i>	IEC 512-9b	Circuit Resistance (mOhms)	<40
<i>Humidity</i>	IEC 512-11c	Circuit Resistance (mOhms)	<40
<i>Thermal Shock</i>	IEC 512-11d	Circuit Resistance (mOhms)	<40
<i>Climatic Sequence</i>	IEC 512-11a	Circuit Resistance (mOhms)	<40
<i>Flowing Mixed Gas Corrosion</i>	IEC 512-11g	Circuit Resistance (mOhms)	<40

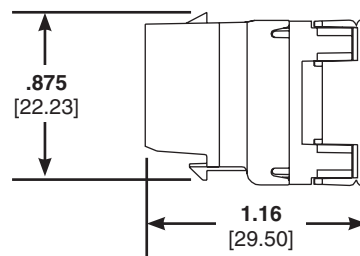

Dimensions are in inches [Dimensions in brackets are metric]

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

©2016 Panduit Corp.  
ALL RIGHTS RESERVED.  
NKDS52--WW-ENG  
9/15/2016

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Modular Connectors / Ethernet Connectors](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [MP1010RX-1000](#) [MP44RX-1000](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GAX-8-62](#) [GDCX-PA-66-50](#) [GDCX-PN-64](#) [GDCX-PN-66](#) [GDCX-PN-66-50](#) [GDLX-A-66](#) [GDLX-N-66](#) [GDLX-S-66](#) [GDLX-S-88K](#) [GDTX-S-88-50](#) [GDX-PA-1010](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#) [GMX-N-1010](#) [GMX-S-1010](#) [GMX-S-66](#) [GMX-SMT4-N-88](#) [GPX-2-64](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05](#) [GSX-NS2-88-3.05-50](#) [GSX-NS-88-3.05-50](#) [PT-108A-8C-UL](#) [PT-J951-8C](#) [PTS-J531-8CS-50UL](#) [1-1775629-2](#) [A-2014-0-4](#) [GWLX-S-88-GR](#) [GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#) [132764-001](#) [1413235](#) [MP88X-1000](#) [MPS88RX-5000](#) [E5288-S000K3-L](#) [E5908-15A242-L](#) [155302-001](#) [AX100653](#)