


Pan-Punch® Category 5e 19" Rack Mount Panel Kits

- Exceed ANSI/TIA-568-C.2 Category 5e standard
- Field terminable
- Ideal for use in cross-connects and consolidation point applications
- Include required quantity of bases and connecting blocks, label holders, and labels
- Available with 4 or 5-pair connecting blocks


P110B1004R2Y

P110B1004R4WJY

Part Number	Part Description	No. of Rack Spaces [^]	Std. Pkg. Qty.	Std. Ctn. Qty.
-------------	------------------	---------------------------------	----------------	----------------

Rack Mount Panel Kit with Bases and Connecting Blocks

P110B1004R2Y	Two 100-pair bases pre-mounted to panel. 4-pair connector kit included with five 4-pair connectors and one 5-pair connector per row of 25 pairs.	2	1	10
P110B1005R2Y	Two 100-pair bases pre-mounted to panel. 5-pair connector kit included with five 5-pair connectors per row of 25 pairs.	2	1	10

Rack Mount Panel Kit with Bases, Connecting Blocks, and Jumper Troughs

P110B1004R4WJY	Two 100-pair bases and jumper troughs pre-mounted to 19" rack mount panel. 4-pair connector kit included with five 4-pair connectors and one 5-pair connector per row of 25 pairs.	4	1	10
P110B1005R4WJY	Two 100-pair bases and jumper troughs pre-mounted to 19" rack mount panel with 5-pair connector kit included with five 5-pair connectors per row of 25 pairs.	4	1	10

[^]One rack space = 1.75" (44.45mm).

Includes mounting screws.


Termination tool available on page B.87 of SA-NCCB51.

Can be clearly identified with labels found on page B.80 of SA-NCCB51.



Pan-Punch® 110 Category 5e Tower System

- Provides a complete cross-connect system
- Designed for wall mount applications
- Available in 300 and 900 pair configurations with 3, 4, or 5-pair connecting blocks
- Supplied jumper troughs provide horizontal cable management
- Tower provides vertical feeder cable management

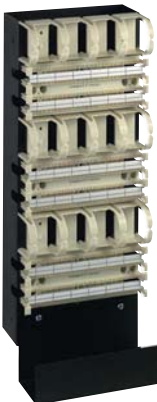
P110KT300Y

Part Number	Part Description	Std. Pkg. Qty.
-------------	------------------	----------------

Pan-Punch® 300-Pair Tower Kits

P110KT3004Y	Convenient packaging includes all of the components required to completely wire a 110 base.	1
P110KT3005Y		1

Pan-Punch® 900-Pair Tower Kits

P110KT9004Y	Convenient packaging includes all of the components required to completely wire a 110 base.	1
P110KT9005Y		1

Pan-Punch® Towers

P110T300Y	300-pair tower. Components sold separately.	1
P110T900Y	900-pair tower. Components sold separately.	1

Each tower system contains adequate connecting blocks to complete each 25-pair wiring strip. Example: P110KT3004Y includes five 4-pair and one 5-pair connecting block per 25-pair wiring strip for a total of sixty 4-pair and twelve 5-pair connecting blocks.

GP6™ PLUS system can be installed on individual towers, not recommended for use with GP6™ PLUS high density bases.

Termination tool available on page B.87 of SA-NCCB51.

Cable requirement: terminates most 22 – 26 AWL solid or stranded IWO wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [panduit](#) manufacturer:

Other Similar products are found below :

[CF502550F-Q](#) [PK14-8R-X](#) [CBXJ2IW-A](#) [PK10-56R-L](#) [PCV-110CY](#) [PSL-SCBD-EI](#) [CBX4AW-AY](#) [CBXS2AW-A](#) [CS25-18SL-CY](#)
[CFPFLS2SAW](#) [PK10-10R-X](#) [PUM-049-C0](#) [PUM-925-C0](#) [SICH38-C](#) [SICH25-C](#) [CCS19-S8-X](#) [CCH57-S12-M30](#) [PCMBR-13](#) [PCPA11IW](#)
[CRE32](#) [M200X042UPT](#) [M200X050ACT](#) [M200X050Y7T](#) [M200X080FQT](#) [M200X100ACT](#) [M200X100AIT](#) [CRTW](#) [CSVBP](#) [CT-1000](#) [CT-](#)
[1004](#) [CT-1104](#) [CT-2550CH](#) [CT-2570CH](#) [M300X050ACT](#) [M300X100ACT](#) [CT-900HPH](#) [CUFB48BL](#) [CVED32VE](#) [CVED32VEPG](#)
[CVED40VEN](#) [CVED40VEPG](#) [CWF400](#) [CWMPV2340](#) [CWMPV2440](#) [CWMPV3340](#) [CWMPV3440](#) [MBEH-TLR](#) [MBH-MR](#) [MBH-MR316](#)
[MBH-TLR316](#)