

# TX5500™ F/UTP Copper Cable

# PANDUIT®

## SPECIFICATION SHEET

### specifications

Category 5e cable shall exceed ANSI/TIA-568-C.2 and IEC 61156-5 Category 5e component standards. The conductors shall be 24 AWG construction with FEP (CMP) or polyethylene (CMR) insulation. All four pairs shall be shielded with an overall polyester aluminum foil with stranded copper drain wire and covered with a low smoke flame-retardant PVC jacket (CMP) or flame-retardant PVC (CMR) jacket.



### technical information

<b>Electrical performance:</b>	Certified channel performance in a 4-conductor configuration up to 100 meters and exceeds ISO 11801 2nd Edition Class D and ANSI/TIA-568-C.2 Category 5e standards at swept frequencies up to 100 MHz
	Certified component performance up to 100 meters and exceeds the component requirement of IEC 61156-5 and ANSI/TIA-568-C.2 Category 5e component standards at swept frequencies up to 100 MHz
<b>Conductors/insulators:</b>	Plenum: 24 AWG solid copper insulated with FEP Riser: 24 AWG solid copper insulated with polyethylene
<b>Flame rating:</b>	Plenum: NFPA 262 Riser: UL 1666
<b>PoE compliance:</b>	Meets IEEE 802.3af and IEEE 802.3at for PoE applications
<b>Installation tension:</b>	25 lbf (110 N) maximum
<b>Temperature rating:</b>	32°F to 122°F (0°C to 50°C) during installation -4°F to 140°F (-20°C to 60°C) during operation
<b>Cable jacket:</b>	Plenum – low smoke flame-retardant PVC Riser – flame-retardant PVC
<b>Cable diameter:</b>	Plenum – 0.229 in. (5.81mm) nominal Riser – 0.241 in. (6.12mm) nominal
<b>Cable weight:</b>	Plenum – 30 lbs./1000 ft. (13.6 kg/305m) Riser – 29 lbs./1000 ft. (13.1 kg/305m)
<b>Packaging:</b>	1000 ft. (305m) on a reel Plenum – 37 lbs./1000 ft. (16.8 kg/305m) Riser – 36 lbs./1000 ft. (16.3 kg/305m) Package tested to ISTA procedure 1A

### key features and benefits

<b>Overall metallic foil shield</b>	Provides the additional signal isolation advantage of an F/UTP design and is ideal for network installations that may be subjected to higher than normal external electromagnetic noise sources
<b>Improved security</b>	Reduces signal emissions for secure transmissions
<b>Internal drain wire</b>	Facilitates means of grounding the cable and provides for efficient performance and protection of network investment
<b>Descending length cable markings</b>	Easy identification of remaining cable reduces installation time and cable scrap

### applications

TX5500™ F/UTP Copper Cable is a component of the Panduit® TX5500™ Shielded Copper Cabling System. This end-to-end system provides design flexibility to protect network investments. With certified performance to the ISO 11801 Class D standards and ANSI/TIA-568-C.2 Category 5e, this system is ideal for today's high performance

workstation applications.

Usage of the TX5500™ Shielded Copper Cabling System includes:

- Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet)
- 155 Mb/s ATM, 622 Mb/s ATM, 1.2 Gb/s ATM
- Token Ring 4/16

[www.panduit.com](http://www.panduit.com)

#### TX5500™ Shielded Copper Cabling System

#### TX5500™ F/UTP Copper Cable

<b>Plenum:</b>	PFP5504IG*-UY
<b>Riser:</b>	PRF5504IG*-UY

#### Mini-Com® TX5e™ Shielded Jack Module

<b>Jack module:</b>	CJS5E88TGY
---------------------	------------

#### TX5e™ Shielded Patch Cords

<b>Meters:</b>	STPCH**MBBL
----------------	-------------

#### Mini-Com® Angled All Metal Modular Patch Panels

<b>24-port, 1 RU:</b>	CPA24BLY
<b>48-port, 2 RU:</b>	CPA48BLY
<b>72-port, 2 RU:</b>	CPA72BLY

#### Mini-Com® Flat All Metal Modular Patch Panels

<b>24-port, 1 RU:</b>	CP24BLY
<b>48-port, 2 RU:</b>	CP48BLY
<b>72-port, 2 RU:</b>	CP72BLY

#### Cable Prep Tools

<b>Wire snipping tool:</b>	CWST
<b>Wire stripping tool:</b>	CJAST

\*For cable colors other than IG (International Gray), contact customer service.


\*\*For standard lengths 1 to 10 meters (increments of one meter) and 0.5, 1.5, 2.5, 15, 20 meters, change the length designation in the part number to the desired length. Standard patch cable color is Off White. For standard strain relief boot colors other than Black, replace suffix BL (Black) with BU (Blue), GR (Green), RD (Red), YL (Yellow) or OR (Orange) in the part number. For example, the part number for a 15-meter Off White patch cord with blue strain relief boots is STPCH15MBBU.

# TX5500™ F/UTP Copper Cable

## Additional Specifications

Mechanical Test	
Ultimate Breaking Strength	>90 lbf (400 N)
Minimum Bend Radius	8 x cable diameter
Electrical Test	
DC Resistance	<9.38 Ohm per 328 ft. (100m)
DC Resistance Unbalance	<5%
Mutual Capacitance	<5.6 nF per 328 ft. (100m) at 1 kHz
Capacitance Unbalance	<330 pF per 328 ft. (100m) at 1 kHz
Characteristic Impedance	100 Ohm +/-15% up to 100 MHz
Nominal Velocity of Propagation (NVP)	72% nominal

## Cable Construction

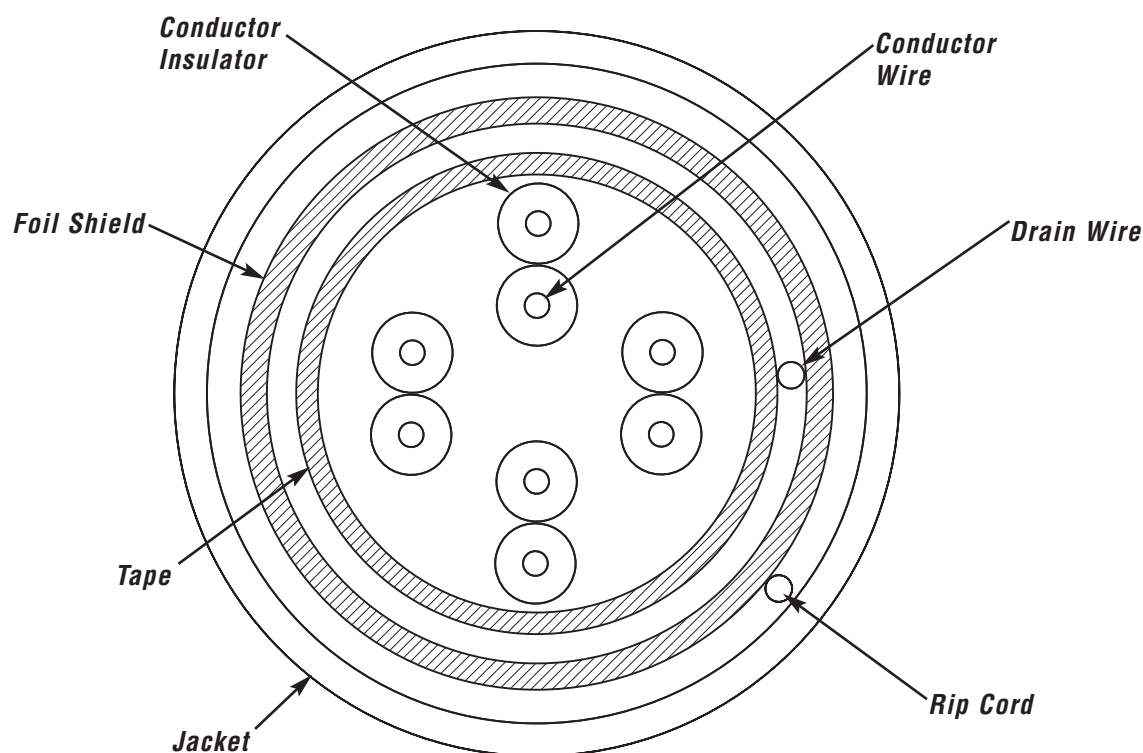

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300 and reference COSP140

**PANDUIT**®

©2010 Panduit Corp.  
ALL RIGHTS RESERVED.

WW-COSP140

12/2010

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wire Ducting](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[66200A-10](#) [CVED32VEPG](#) [CVED40VEPG](#) [F512D5-5F140Y](#) [F512D5-5F200Y](#) [F512D5-5F26Y](#) [F512D5-5F30Y](#) [F512D5-5F33Y](#) [F512D5-5F34Y](#) [F512D5-5F45Y](#) [F512D5-5F50Y](#) [F512D5-5F54Y](#) [F512D5-5F66Y](#) [F512D5-5F70Y](#) [F512D5-5F75Y](#) [F512D5-5F90Y](#) [F612D5-5F100Y](#) [F612D5-5F130Y](#) [F612D5-5F50Y](#) [F612D5-5F56Y](#) [F612D5-5F58Y](#) [F6L12D5-5F46](#) [F912D5-5F11Y](#) [F912D5-5F170Y](#) [F912D5-5F175Y](#) [F912D5-5F230Y](#) [F912D5-5F300Y](#) [F912D5-5F55Y](#) [F912D5-5F56Y](#) [F912D5-5F63Y](#) [F912D5-5F6Y](#) [F912D5-5F75Y](#) [F912D5-5F85Y](#) [F912D5-5F86Y](#) [F912D5-5F88Y](#) [F912D5-5F96Y](#) [FAP0047WBLMTP](#) [FAP12WBRDRDDLZ](#) [FAP12WDYLYLDLZ](#) [FAP12WEORORDLZ](#) [FAP6WEORORDLZ](#) [FAP6WFDBDBDLZ](#) [FAP8WEORORDLZ](#) [FCE2UWCL](#) [800A-LB](#) [802A-ECSP](#) [802I-ICSP](#) [FJQADH](#) [FJQFXT](#) [PED10](#)