
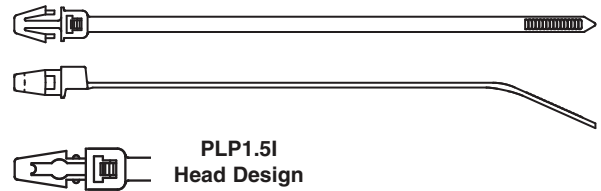


Pan-Ty® Push Mount Ties

- Natural nylon material for indoor use
- Weather resistant material has greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Heat stabilized material for high temperature applications up to 239°F (115°C) – indoor use
- *Wingless* design allows tie to be used in confined spaces

- Cable tie, mount, and fastener in a single part
- Economical push mount ties are used to attach bundles to another surface such as a flat panel
- Anchor is easily pressed into a pre-formed hole and locks in place
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

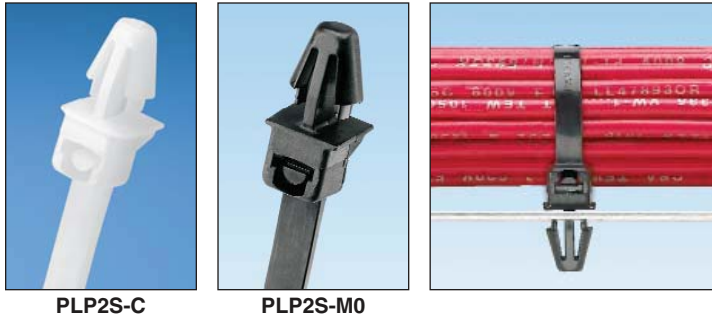

| Part Number | Length | | Width | | Thickness | | Nominal Hole Dia. | | Max. Panel Thickness | | Max. Bundle Dia. | | Min. Loop Tensile Str. | | Recommended Installation Tool | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|--------|----|-------|----|-----------|----|-------------------|----|----------------------|----|------------------|----|------------------------|---|-------------------------------|----------------|----------------|
| | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | Lbs. | N | | | |

Nylon 6.6

Intermediate Cross Section

| | | | | | | | | | | | | | | | | | |
|-----------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|----------------------------------|-----|------|
| PLP1.5I-C | 6.1 | 156 | .135 | 3.4 | .045 | 1.1 | .187 | 4.7 | .093 | 2.4 | 1.25 | 32 | 40 | 178 | GTS, GTSL, GS2B, PTS, PPTS, STS2 | 100 | 1000 |
|-----------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|----------------------------------|-----|------|

Standard Cross Section

| | | | | | | | | | | | | | | | | | |
|----------------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|--|------|-------|
| PLP1S-M | 5.3 | 135 | .180 | 4.6 | .050 | 1.3 | .250 | 6.4 | .125 | 3.2 | 1.00 | 25 | 50 | 222 | GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2 | 1000 | 10000 |
| PLP1.5S-M | 6.7 | 170 | .180 | 4.6 | .050 | 1.3 | .250 | 6.4 | .125 | 3.2 | 1.50 | 38 | 50 | 222 | | 1000 | 10000 |
| PLP2S-C | 7.9 | 200 | .180 | 4.6 | .050 | 1.3 | .250 | 6.4 | .125 | 3.2 | 1.75 | 45 | 50 | 222 | | 100 | 1000 |

Weather Resistant Nylon 6.6

Intermediate Cross Section

| | | | | | | | | | | | | | | | | | |
|------------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|----------------------------------|------|-------|
| PLP1.5I-M0 | 6.1 | 156 | .135 | 3.4 | .045 | 1.1 | .187 | 4.7 | .093 | 2.4 | 1.25 | 32 | 40 | 178 | GTS, GTSL, GS2B, PTS, PPTS, STS2 | 1000 | 25000 |
|------------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|----------------------------------|------|-------|

Standard Cross Section

| | | | | | | | | | | | | | | | | | |
|-----------------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|--|------|-------|
| PLP1S-M0 | 5.3 | 135 | .180 | 4.6 | .050 | 1.3 | .250 | 6.4 | .125 | 3.2 | 1.00 | 25 | 50 | 222 | GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2 | 1000 | 10000 |
| PLP2S-M0 | 7.9 | 200 | .180 | 4.6 | .050 | 1.3 | .250 | 6.4 | .125 | 3.2 | 1.75 | 45 | 50 | 222 | | 1000 | 10000 |

Heat Stabilized Nylon 6.6

Intermediate Cross Section

| | | | | | | | | | | | | | | | | | |
|-------------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|----------------------------------|------|-------|
| PLP1.5I-M30 | 6.1 | 156 | .135 | 3.4 | .045 | 1.1 | .187 | 4.7 | .093 | 2.4 | 1.25 | 32 | 40 | 178 | GTS, GTSL, GS2B, PTS, PPTS, STS2 | 1000 | 25000 |
|-------------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|----------------------------------|------|-------|

Standard Cross Section

| | | | | | | | | | | | | | | | | | |
|-----------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|--|------|-------|
| PLP1S-M30 | 5.3 | 135 | .180 | 4.6 | .050 | 1.3 | .250 | 6.4 | .125 | 3.2 | 1.00 | 25 | 50 | 222 | GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2 | 1000 | 10000 |
| PLP2S-M30 | 7.9 | 200 | .180 | 4.6 | .050 | 1.3 | .250 | 6.4 | .125 | 3.2 | 1.75 | 45 | 50 | 222 | | 1000 | 10000 |

A. System Overview

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Ties](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[65037-C](#) [770-1751-10](#) [REL50L0C2](#) [20093-0](#) [SF600-120X](#) [SJ3518FR-1x50](#) [SJ3526N-Beige-2"x50yd](#) [SJ3526N BLACK 58" X 50YD](#) [SJ3571](#)
[SJ-3571-1"x50yd-Black](#) [PLT2S-C4](#) [34-455-C](#) [3722](#) [561-B110120](#) [561-N3510](#) [TYZ528M](#) [34-463-C](#) [URT20S-M](#) [06226](#) [08350-0](#) [08600-0](#)
[08376-0](#) [10037-0](#) [10325-0](#) [10362-0](#) [10606-0](#) [1122-4JW8](#) [561-EZ250](#) [561-EZ625](#) [SJ3527N-Beige-2"x50yd](#) [SJ3527N-LOOP-BLACK-1](#)
[SJ3572-2"x50yd-Black](#) [CF5625-000](#) [65004-C](#) [65005-C](#) [65007-C](#) [65036-C](#) [157-00039](#) [770-1708](#) [770-1753-10](#) [770-1752](#) [SPNY-041-9](#)
[SF400-120X](#) [3719](#) [08582-0](#) [08386-0](#) [10431-0](#) [08359-0](#) [10620-0](#) [10345-0](#)