


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

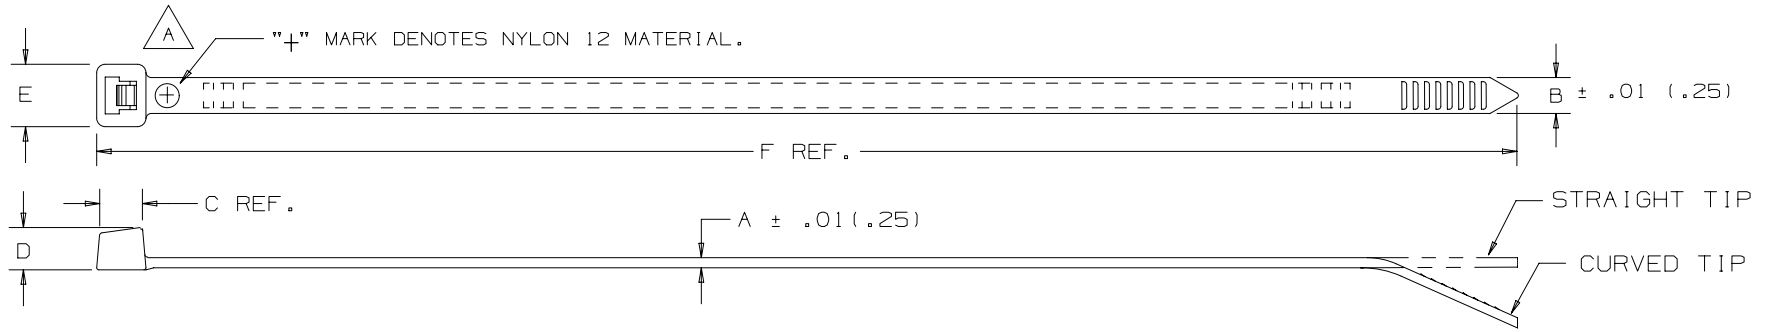

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION **	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT1M-120	.06 (1.5)	.87 (22)	.043 (1.1)	.098 (2.5)	.169 (4.3)	.154 (3.9)	.180 (4.6)	3.9 (99)	18 (80)	M	CURVED	0.06 (27)
PLT1.5I-120	.06 (1.5)	1.38 (35)	.045 (1.1)	.142 (3.6)	.206 (5.2)	.180 (4.6)	.240 (6.1)	5.6 (142)	25 (111)	I	CURVED	.12 (55)
PLT2S-120	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.262 (6.7)	.220 (5.6)	.316 (8.0)	7.4 (188)	40 (178)	S	CURVED	.26 (118)
PLT2.5S-120	.06 (1.5)	2.50 (63.5)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	9.8 (249)	40 (178)	S	CURVED	0.34 (152)
PLT3S-120	.06 (1.5)	3.00 (76)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	11.5 (292)	40 (178)	S	CURVED	0.36 (165)
PLT4S-120	.06 (1.5)	4.00 (102)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	14.5 (368)	40 (178)	S	CURVED	.47 (213)
PLT4H-120	.188 (4.8)	4.00 (102)	.075 (1.9)	.300 (7.6)	.338 (8.6)	.290 (7.4)	.480 (12.2)	14.5 (368)	90 (400)	H	STRAIGHT	1.21 (549)
PLT7LH-120	.188 (4.8)	7.00 (178)	.075 (1.9)	.300 (7.6)	.350 (8.8)	.330 (8.4)	.480 (12.2)	24.7 (627)	90 (400)	LH	STRAIGHT	1.98 (899)
PLT8LH-120	.188 (4.8)	8.00 (203)	.075 (1.9)	.300 (7.6)	.350 (8.8)	.330 (8.4)	.480 (12.2)	27.6 (701)	90 (400)	LH	STRAIGHT	2.01 (913)

NOTES:

- * 1) SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, AND PART COLOR.
- **2) CABLE TIE CROSS SECTION CODE: M=MINIATURE, I=INTERMEDIATE, S=STANDARD, LH=LIGHT HEAVY & H=HEAVY
- 3) MATERIAL IS WEATHER RESISTANT AND HAS A LOW WATER ABSORPTION PERCENTAGE.
- 4) MATERIAL IS RESISTANT TO MOST SALTS & CHEMICALS.
- 5) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 194°F (90°C).
- 6) MATERIAL HAS LOW TEMPERATURE TOUGHNESS DOWN TO -40°F (-40°C) WITH A NOTCHED IZOD RATING OF 1.3 ft lbs/in @ ROOM TEMPERATURE.

DIMENSIONS IN PARENTHESIS ARE IN METRIC

TITLE		PAN-TY CABLE TIES PLT SERIES	
ITEM REVISION NAME		CUSTOMER DRAWING	
W10035ER/04		PANDUIT	
DATASET FILE NAME			
W10035ER-SS-19103_REV10 CUSTOMER		MATERIAL:	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		NYLON 12 (BLACK)	
.x ± --- .xxx ± .020 (.51)		DRAWING NUMBER:	
.xx ± .02 (.5) ANGLES ± ---		SS-19103	
THIRD ANGLE PROJECTION		SCALE	
DRAWN BY		NONE	
DATE		SHT 1 OF 1	
12/20/84		A	
CHK		SIZE	
HVP		A	

10	1/19/18	BWG	MPH	JADE	ADDED THE "+" SIGN TO DENOTE NYLON 12 MATERIAL.	021520/00
--	---	--	--	--	UPDATED TITLE BORDER.	---
9	1/09/14	BWG	RMHI	JADE	ADDED PLT1M, 2.5S AND 3S.	SS-19103/09
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

D10100DA/16

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Ties](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[65037-C](#) [770-1751-10](#) [REL50L0C2](#) [20093-0](#) [SF600-120X](#) [SJ3518FR-1x50](#) [SJ3526N-Beige-2"x50yd](#) [SJ3526N BLACK 58" X 50YD](#) [SJ3571](#)
[SJ-3571-1"x50yd-Black](#) [PLT2S-C4](#) [34-455-C](#) [3722](#) [561-B110120](#) [561-N3510](#) [TYZ528M](#) [34-463-C](#) [URT20S-M](#) [06226](#) [08350-0](#) [08600-0](#)
[08376-0](#) [10037-0](#) [10325-0](#) [10362-0](#) [10606-0](#) [1122-4JW8](#) [561-EZ250](#) [561-EZ625](#) [SJ3527N-Beige-2"x50yd](#) [SJ3527N-LOOP-BLACK-1](#)
[SJ3572-2"x50yd-Black](#) [CF5625-000](#) [65004-C](#) [65005-C](#) [65007-C](#) [65036-C](#) [157-00039](#) [770-1708](#) [770-1753-10](#) [770-1752](#) [SPNY-041-9](#)
[SF400-120X](#) [3719](#) [08582-0](#) [08386-0](#) [10431-0](#) [08359-0](#) [10620-0](#) [10345-0](#)