
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

ı										
	PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]					CA9	CA-800(EZ)
		ENGLISH	METRIC	L ± (0,8)	$W\pm\frac{.01}{[0,3]}$	C ± .02 [0,5]	$M\pm\frac{.03}{[0,8]}$	H± (0,3)	SERIES CRIMP DIE	SERIES CRIMP DIE
	PMV1-3FB-3K		М3	.78 [19,8]	.23 [5,8]	.20 [5,1]	.64 [16,3]	.13 [3,3]		
	PV18-6FB-3K	#6	M3,5	.78 [19,8]	.30 [7,6]	.20 [5,1]	.64 [16,3]	.15 [3,8]		
	PV18-6FNB-3K	#6	M3,5	.78 [19,8]	.25 [6,4]	.20 [5,1]	.64 [16,3]	.15 [3,8]		
	PV18-8FB-3K	#8	M4	.84 [21,3]	.32 [8,1]	.23 [5,8]	.68 [17,2]	.17 [4,3]	CD9-1A	CD-800-1
	PV18-10FB-3K	#10		.86 [21,8]	.35 [8,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]	CD9-IA	
	PV18-10FNB-3K	#10		.86 [21,8]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]		
	PMV1-5FB-3K		M5	.86 [21,8]	.35 [8,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]		
	PV18-14FB-3K	1/4"	M6	1.03 [26,2]	.44 [11,2]	.33 [8,4]	.78 [19,9]	.27 [6,9]		

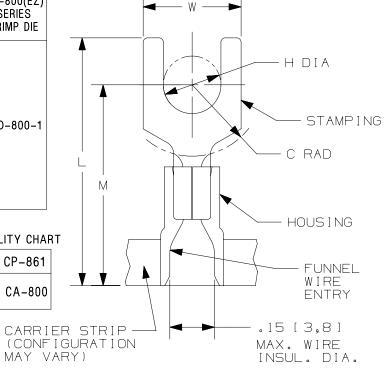

PRESS/APPLICATOR COMPATIBILITY CHART

PRESS	CP-871	CP-861
APPLICATOR	CA9 CA-800EZ	CA-800

NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:

A. #22-18 AWG [0,5-1,0 mm2] SOLID OR STRANDED COPPER WIRE

B. 221°F [105°C] MAX. OPERATING TEMPERATURE C. 600 V. MAX. VOLTAGE RATING

2. SEE www.panduit.com FOR PACKAGE QUANTITIES

3. MATERIAL:

A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED

B. HOUSING: VINYL, RED

4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT


5. WIRE STRIP LENGTH: $1/4^{**}$ $^{+1/32}_{-0}$ [6,4mm $^{+0,8}_{-0}$]



E52164

TITLE

CERTIFIED LR31212



В

FORK TERMINALS, 2 PC. VINYL INSULATED, #22-18 CONTINUOUS REFL

" ∟							# 22-10, CONTINUOUS HEEL			
						CUSTOMER DRAWING				
	08	1/17	TMR	TMR	RGB	ADMINISTRATIVE CHANGE SEE ECN	N41081BA-A41081	1 N41081BA/08 DATASET FILE NAME		
	07	12/16	TMR	TMR	RGB	REVISED CERTIFICATION, C DIM TOL WAS .015	N41081BA-A41081	N41081BA_DC/08A		
	06	12/16	TMR	TMR	RGB	NONE, UPDATE TO REV 7	N41081BA-A41081	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		
	05	07/14	MBY	JHNU	RGB	REVISED NOTES, MOVED TOOLS TO TABLE, REVISED CERTIFICATION	N41081BA-A41081	.XX ± ANGLES ±		
N/15	04	09.17.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	A 41081	THIRD ANGLE PROJECTION A 4 1 08 1		
J001010	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY DATE CHK SCALE DSM - FS N.T.S. SHT 1 0F 1		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Terminals category:

Click to view products by Panduit manufacturer:

Other Similar products are found below:

HT-13-10 71M-250-32-NB 01-2065-1-0216 00581P0075 M10-10RX M10BCK 60205-1 604200-1 60598-1-CUT-TAPE 60617-1-C 60873-1 M14-516R/SK M14-6RSX M18-8FBX M18-8R/LX M18BCK 61314-6-C 61-S 61-SN-A 62-NBM-A 63-S 640179-1 640917-2-CUT-TAPE 6501550002 66107-2-C 696683-1 696834-1 696861-1 696931-1 696999-1 M8-516RK M86700006 MA250DMFMX-A 701-2007 701-2307 701-7761-03 70F-110-32-PB 718-N-A 71M-187-20-NBL 71M-250-32-NBL 72F-187-20-NBL 72M-250-32-NBL 7310 73F-250-32 73F-250-32-NL F14-10C F-1M 751-250 76650-5002 76828-149