

TX6A™ 10Gig UTP Copper Cable with Vari-MaTriX Technology

specifications

Category 6A/Class E_A cable shall be constructed of 23 AWG copper conductors with FEP Plenum (CMP) or PE Riser (CMR) insulation. The copper conductors shall be twisted in pairs and separated by a cross-divider. All four pairs shall be surrounded by a metallic Vari-MaTriX tape cut into segments of varying length and a flame retardant jacket. The Vari-MaTriX tape shall minimize the cable diameter and suppress the effects of alien crosstalk while retaining UTP electromagnetic interference immunity. The innovative cable design shall provide installation flexibility as cables can be routed in tight bundles through pathways and spaces.



TX6A™ 10Gig UTP Copper Cabling System with Vari-MaTriX Technology

TX6A™ 10Gig UTP Copper Cable with Vari-MaTriX Technology


Plenum (CMP): PUP6AV04*-G
Riser (CMR): PUR6AV04*-G

*To designate color, add suffix BU (Blue), WH (White), IG (International Gray), or YL (Yellow). For additional cable colors, contact customer service.

technical information

| | |
|---|--|
| Category 6A/Class E_A channel and component performance: | Certified channel performance in a 4-connector configuration up to 100 meters and exceeds the requirements of ANSI/TIA-568.2-D Category 6A and ISO 11801 Class E _A standards swept up to 650 MHz for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the Panduit® TX6A™ 10Gig UTP Copper Cabling System Certified component performance up to 100 meters and exceeds the ANSI/TIA-568.2-D Category 6A and IEC 61156-5 Category 6A standards for supporting 10GBASE-T transmission over twisted-pair cabling systems |
| Standards compliance: | UL Listed CMP-LP (0.7A) and CMR-LP (0.5A) |
| Cable diameter: | Plenum (CMP): 0.250 in. (6.4mm) nominal Riser (CMR): 0.260 in. (6.6mm) nominal |
| Conductors/insulators: | 23 AWG solid copper insulated with FEP (CMP), flame retardant PE (CMR) |
| Flame rating: | Plenum (CMP): NFPA 262 Riser (CMR): UL1666 |
| PoE/PoH compliant: | Meets IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt for PoE applications UL PoH certified per UL4299 |
| Installation tension: | 25 lbf (110 N) maximum |
| Temperature rating: | 32°F to 140°F (0°C to 60°C) during installation -4°F to 221°F (-20°C to 105°C) during operation (CMP) -20°C to 75°C (-4°F to 167°F) during operation (CMR) |
| Cable jacket: | Plenum (CMP): Flame retardant PVC Riser (CMR): Low smoke flame retardant PVC |
| Cable weight: | Plenum (CMP): 31.2 lbs./1000 ft. (14.2 kg/305m) Riser (CMR): 28.9 lbs./1000 ft. (13.1 kg/305m) |
| Packaging: | 1000 ft. (305m) on a reel Plenum (CMP): 33.4 lbs./1000 ft. (15.2 kg/305m) Riser (CMR): 31.1 lbs./1000 ft. (14.1 kg/305m) Package tested to ISTA procedure 1A |

key features and benefits

| | |
|---|--|
| Vari-MaTriX Technology  | Best-in-class cable diameter delivers superior PSANEXT and PSAACRF suppression while retaining UTP EMI immunity |
| Superior headroom warranty | Provides the highest worst-case margins above the industry standard for both electrical and alien crosstalk performance |
| Small, round cable design | Improves fill capacity, cable management, reduces required bend radius and allows efficient use of pathways and spaces |
| Extended temperature range | Allows operation in 105°C (221°F) ambient environment providing error-free performance in high-density cabinets and large cable bundles running PoE+ or PoE++ applications |
| Highest density | All testing and headroom based on 48-port/1RU panels |
| Descending length cable markings | Easy identification of remaining cable to reduce installation time and cable scrap |

applications

The TX6A™ 10Gig UTP Copper Cable with Vari-MaTriX Technology is a component of the TX6A™ 10Gig Copper Cabling System. Interoperable and backward compatible, this end-to-end system provides design flexibility to protect network investments well into the future.

Key applications include:


- 10GBASE-T Ethernet
- Data center I/O consolidation
- Data center server virtualization
- Consolidation of network interconnects
- Back-bone aggregation
- Parallel processing and high speed computing

TX6A™ 10Gig UTP Copper Cable with Vari-MaTriX Technology

additional specifications

| Mechanical Test | |
|---------------------------------------|---------------------------------------|
| Ultimate Breaking Strength | > 90 lbf (400 N) |
| Minimum Bend Radius | 4 x cable diameter |
| Electrical Test | |
| DC Resistance | <9.38 Ohm per 328 ft. (100m) |
| DC Resistance Unbalance | <5% |
| Mutual Capacitance | <5.6 nF per 328 ft. (100m) at 1 kHz |
| Capacitance Unbalance | <330 pF per 328 ft. (100m) at 1 kHz |
| Characteristic Impedance | 100 Ohm +/-15% up to 100 MHz |
| Nominal Velocity of Propagation (NVP) | Plenum (CMP): 67% Riser (CMR): 65% |
| Operating Voltage, Maximum | 80V |

cable construction

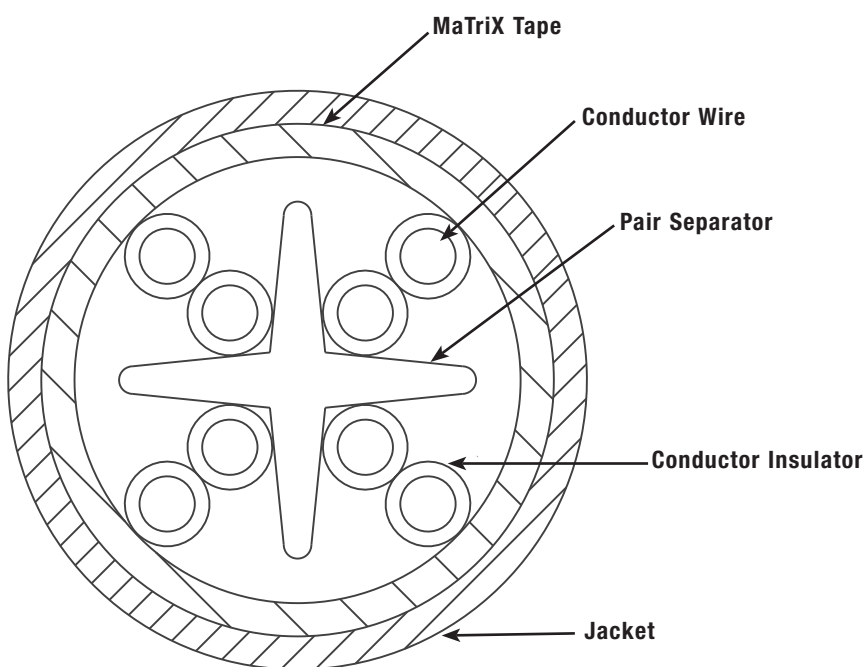

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

© 2019 Panduit Corp.
ALL RIGHTS RESERVED.
COSP416--WW-ENG
8/2019

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[01342.35T.01](#) [01364.35T.01](#) [CS2885-000](#) [CTC-0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [644833-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CY0660-000](#) [730859-000](#) [MCC-USB-4-250](#) [768146-000](#) [773159-000](#) [820457-000](#) [82907-NAT-500](#) [83005-WHT-500](#) [83023-YEL-500](#) [83027-RED-100](#) [83029-GRN-100](#) [8302-CHR-500](#) [83046-RED-100](#) [8305-CHR-100](#) [83306E-WHT-100](#) [83333-WHT-100](#) [8334-060-1000](#) [83349E-WHT-100](#) [83652-RED-100](#) [8404-060-500](#) [8441-BLK-1000](#) [8450-BLK-1000](#) [8451-GRY-U500](#) [8459-CHR-500](#) [8465-CHR-1000](#) [8466-CHR-1000](#) [8467-CHR-1000](#) [8469 060100](#) [8469-CHR-1000](#) [8471-CHR-1000](#) [8473-CHR-U500](#) [8501-ORG-100](#) [8501-RED-100](#) [8503-WHT/BLU-100](#) [8520-BRN-100](#) [8520-GRY-100](#) [8523-GRY-100](#) [8523-GRY-1000](#) [8523-LT-BLU-25](#) [8523-ORG-1000](#)