

### specifications

Category 6/Class E eight-position jack module shall terminate unshielded twisted 4 pair, 22 – 26 AWG, 100 ohm cable and shall not require the use of a punchdown tool. Jack module shall use forward motion termination to optimize performance by maintaining cable pair geometry and eliminating conductor untwist. The white termination cap shall be color coded for T568A and T568B wiring schemes.



### technical information

<b>Category 6/Class E channel and component performance:</b>	Exceeds all TIA/EIA-568-B.2-1 Category 6 and ISO 11801 2nd Edition Class E standard requirements at swept frequencies up to 250 MHz
<b>FCC compliance:</b>	Meets FCC Part 68 Subpart F; contacts plated with 50 microinches of gold for superior performance
<b>IEC compliance:</b>	Meets IEC 60603-7

### key features and benefits

<b>100% performance tested</b>	Confidence that each jack module will deliver the critical electrical performance requirements
<b>Utilizes enhanced GIGA-TX™ technology</b>	Optimizes performance by eliminating conductor untwist; reduces installation expense
<b>Improved termination cap</b>	Conductor retention slots simplify termination
<b>Modularity</b>	Jack modules snap in and out of MINI-COM® Faceplates, Modular Patch Panels and Surface Mount Boxes for fast moves, adds and changes
<b>True strain relief</b>	Controls cable bend radius for long term installed performance
<b>Individual serialized</b>	Marked with quality control number for traceability
<b>Industry standard RJ45 interface</b>	Familiar to end-users; backwards compatible

### applications

MINI-COM® TX6™ PLUS UTP Jack Module is a component of the TX6500™ and TX6000™ Copper Cabling Systems. Interoperable and backward compatible, these end-to-end systems provide design flexibility to protect network investments well into the future. With certified performance to the TIA/EIA-568-B.2-1 Category 6 and ISO 11801 Class E standards, these systems are ideal for today's high performance workstation applications. Usage of the TX6500™ and TX6000™ Copper Cabling

Systems include:

- Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet), 10000BASE-T (10 Gigabit Ethernet over limited distances as specified in the industry 10GBASE-T standards)
- 155 Mb/s ATM, 622 Mb/s ATM, 1.2 Gb/s ATM
- Token Ring 4/16
- Digital video and broadband/baseband analog video
- Voice over Internet Protocol (VoIP)

#### TX6500™ and TX6000™ Copper Cabling Systems

##### MINI-COM® TX6™ PLUS Jack Module

**Module:** CJ688TG\*

##### TX6500™ UTP Copper Cable

**Plenum:** PUP6504\*\*-U  
**Riser:** PUR6504\*\*-UY

##### TX6000™ UTP Copper Cable

**Plenum:** PUP6004\*\*-UY  
**Riser:** PUR6004\*\*-UY

##### TX6™ PLUS Patch Cords

**3 feet:** UTPSP3\*\*\*Y  
**5 feet:** UTPSP5\*\*\*Y  
**7 feet:** UTPSP7\*\*\*Y  
**10 feet:** UTPSP10\*\*\*Y  
**14 feet:** UTPSP14\*\*\*Y  
**20 feet:** UTPSP20\*\*\*Y

##### DP6™ PLUS Flat Punchdown Patch Panels

**12-port** DP12688TGY  
**24-port, 1 RU:** DP24688TGY  
**48-port, 2 RU:** DP48688TGY

##### DP6™ PLUS Angled Punchdown Patch Panels

**24-port, 1 RU:** DPA24688TGY  
**48-port, 2 RU:** DPA48688TGY

##### GP6™ PLUS Category 6 Punchdown System

See website ([www.panduit.com](http://www.panduit.com)) or catalog for complete system information

##### Termination Tools

**Jack module termination tool:** TGJT  
**Wire snipping tool:** CWST  
**Wire stripping tool:** CCAST

\*To designate a color, add suffix IW (Off White), EI (Electric Ivory), IG (Int'l Gray), WH (White), BL (Black), OR (Orange), RD (Red), BU (Blue), GR (Green), YL (Yellow), or VL (Violet).

\*\*For colors other than BU (Blue), substitute with WH (White), YL (Yellow) or IG (Int'l Gray).

\*\*\*For lengths 1 to 20 feet (increments of one foot) and 25, 30, 35, 40 feet, change the length designation in the part number to the desired length. For standard cable colors other than Off White, add suffix BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange) or VL (Violet) before Y at the end of the part number. For example, the part number for a blue 15-foot patch cord is UTPSP15BUY.



# MINI-Com® TX6™ PLUS UTP Jack Module

## Test Results

Mechanical Test	Test Method	Measurement	Typical Test Results
Normal Force	—	Load (grams)	>100
Vibration	IEC 512-6d	Circuit Resistance (mOhms)	<40
Shock	IEC 512-6c	Contact Disturbance (microseconds)	<5
Durability	IEC 512-9a	Circuit Resistance (mOhms)	<40
Mating/Un-Mating	IEC 512-13b	Mating Force (N)	<20
		Un-Mating Force (N)	<20
Termination Cycles	IEC 352	Number of Cycles	>20

Electrical Test	Test Method	Measurement	Typical Test Results
Low Level Circuit Resistance	IEC 512-2a	Resistance (mOhms)	<20
Dielectric Withstand Voltage	IEC 512-4a	1000 V, 1 minute	Passed
Insulation Resistance	IEC 512-3a	Resistance (mOhms)	>500

Environmental Test	Test Method	Measurement	Typical Test Results
Temperature Life	IEC 512-9b	Circuit Resistance (mOhms)	<40
Humidity	IEC 512-11c	Circuit Resistance (mOhms)	<40
Thermal Shock	IEC 512-11d	Circuit Resistance (mOhms)	<40
Climatic Sequence	IEC 512-11a	Circuit Resistance (mOhms)	<40
Flowing Mixed Gas Corrosion	IEC 512-11g	Circuit Resistance (mOhms)	<40

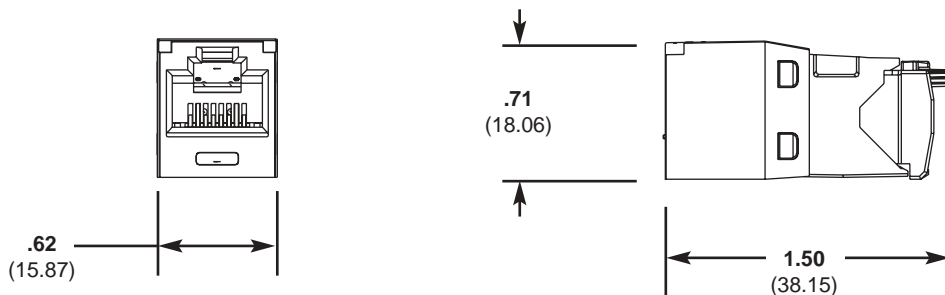

Dimensions are in inches (Dimensions in parentheses are metric).

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.3767.7011

PANDUIT LATIN AMERICA  
Jalisco, Mexico  
cs-la@panduit.com  
Phone: 52.333.666.2501

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of PANDUIT product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)



For more information  
Visit us at [www.panduit.com](http://www.panduit.com)  
Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800-777-3300 and reference COSP48

©2008 PANDUIT Corp.  
ALL RIGHTS RESERVED.  
WW-COSP48  
3/2008

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wire Ducting](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[66200A-10](#) [CVED32VEPG](#) [CVED40VEPG](#) [F512D5-5F140Y](#) [F512D5-5F200Y](#) [F512D5-5F26Y](#) [F512D5-5F30Y](#) [F512D5-5F33Y](#) [F512D5-5F34Y](#) [F512D5-5F45Y](#) [F512D5-5F50Y](#) [F512D5-5F54Y](#) [F512D5-5F66Y](#) [F512D5-5F70Y](#) [F512D5-5F75Y](#) [F512D5-5F90Y](#) [F612D5-5F100Y](#) [F612D5-5F130Y](#) [F612D5-5F50Y](#) [F612D5-5F56Y](#) [F612D5-5F58Y](#) [F6L12D5-5F46](#) [F912D5-5F11Y](#) [F912D5-5F170Y](#) [F912D5-5F175Y](#) [F912D5-5F230Y](#) [F912D5-5F300Y](#) [F912D5-5F55Y](#) [F912D5-5F56Y](#) [F912D5-5F63Y](#) [F912D5-5F6Y](#) [F912D5-5F75Y](#) [F912D5-5F85Y](#) [F912D5-5F86Y](#) [F912D5-5F88Y](#) [F912D5-5F96Y](#) [FAP0047WBLMTP](#) [FAP12WBRDRDDLCLZ](#) [FAP12WDYLYLDLCLZ](#) [FAP12WEORORDLCLZ](#) [FAP6WEORORDLCLZ](#) [FAP6WFDBDBDLCLZ](#) [FAP8WEORORDLCLZ](#) [FCE2UWCL](#) [800A-LB](#) [802A-ECSP](#) [802I-ICSP](#) [FJQADH](#) [FJQFXT](#) [PED10](#)