


PanView iQ™ Cross Connect Fiber Patch Cords

The fiber patch cords shall be constructed of industry leading materials. The fiber patch cords shall be terminated at each end with an enhanced performance LC connector that also terminates the copper conductor on the top of the plug. The fiber patch cords shall be available in single-mode and multi-mode configuration. The fiber patch cords shall be used in the fiber patch field of a PanView iQ™ System.

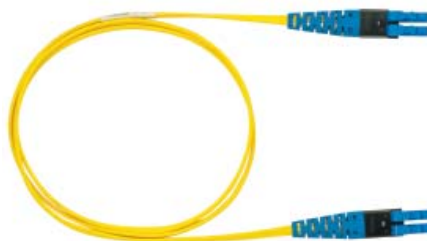

technical information

Standards requirements:	All connectors exceed TIA/EIA-455-21A: 500 mating cycles Compliant with: TIA/EIA-568-C.3 and ISO/IEC 11801 IEC-61754-7 (International) TIA-604-10 (FOCIS-10) UL 1666 (OFNR) or NFPA 262 (OFNP) flame ratings
Insertion loss:	Per connection: 0.25dB max (OM3, OM4) 0.35dB max (LC singlemode)
Return loss:	26dB min (10Gig™ multimode) 55dB min (singlemode)
Intermateability requirements:	Meet all individual type requirements
Packaging:	Supplied one per bag, carton of 10

key features and benefits

100% performance tested	Assurance that each patch cord will deliver the critical electrical performance requirements
Documented metrics	Insertion loss data recorded for every patch cord
Lifetime traceability	Test data is traceable to a QC number on each patch cord
Metallic continuity element	Provides continuity through the patch cord enabling the PanView iQ™ System to robustly monitor patch cord connectivity
Variety of lengths	Available in 1/2 meter increments from 0.5 meter to 10 meters

applications

Panduit's PViQ™ System Hardware, which includes intelligent patch panels, modules and cabling, seamlessly feeds information directly into the Physical Infrastructure Manager (PIM™) Software Platform to provide continuous real-time patch field monitoring and visibility of physical infrastructure connectivity for enhanced system reliability

and security and capacity management. The PViQ™ Fiber Patch Cords are a component of the PViQ™ System. With certified performance to TIA/EIA-568-C.3, these patch cords are ideal for today's high performance fiber applications. The metallic conductor enables robust monitoring of the fiber patch field with the PViQ™ System.

PanView iQ™ System

PanView iQ™ Patch Cords

Singlemode	
LSZH LC-LC:	PVF9L10-10M‡Y
OM3 LC-LC 50 micron LSZH:	PVFXL10-10M‡Y
OM4 LC-LC 50 micron LSZH:	PVFZL10-10M‡Y

PanView iQ™ Fiber Trays

Modular, intelligent, blank 24-port no adapters:	
PVQ-FMT	
OM3 optimized	
MTP:	PVQ-FMTMTP-ZX
singlemode	
MTP:	PVQ-FMTMTP-9

PanView iQ™ Intelligence Modules

Panel manager	
(PM):	PVQ-PM
Expansion module	
(EM):	PVQ-EM
NOTE: PM requires PanView iQ™ Power Supply (not included).	

PanView iQ™ Power Supply

12 volt power supply	
(North America):	PVQ-PS12VDC-S
(Europe):	PVQ-PS12VDC-E
(UK):	PVQ-PS12VDC-U
(Japan):	PVQ-PS12VDC-J

PIM™ Software Platform and Modules

Base functionality	
module:	PIM-BASE
Connectivity management	
module:	PIM-CONNECT
Maintenance, support, and warranty agreement:	
	PIM-CAMA

‡Available in 1/2 meter increments from 0.5M to 10M

PanView iQ™ Cross Connect Fiber Patch Cords

part number

Example: PVFXL10-10M7.5Y = PViQ OM3, LSZH, LC-LC 7.5 meters.

CHARACTER	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
EXAMPLE	P	V	F	X	L	1	0	-	1	0	M	7	.	5	Y

1, 2 – PViQ

3 – Fiber

F = Fiber

4 – Fiber Type

9 = OS1/OS2 Singlemode

X = OM3 50/125µm

Z = OM4 50/125µm

5 – Jacket Type

L = Low Smoke Zero

Halogen (LSZH)

6, 7 – Connector Type (end A)

10 = PViQ Duplex LC

8 – Dash

9, 10 – Connector Type (end B)

10 = PViQ Duplex LC

11 – Unit of Length

M = Meters

12, 13, 14 – Cable Assembly Length


0.5-10

M = Meters

15 – RoHS Compliant

Y = Yes

cable assembly detail

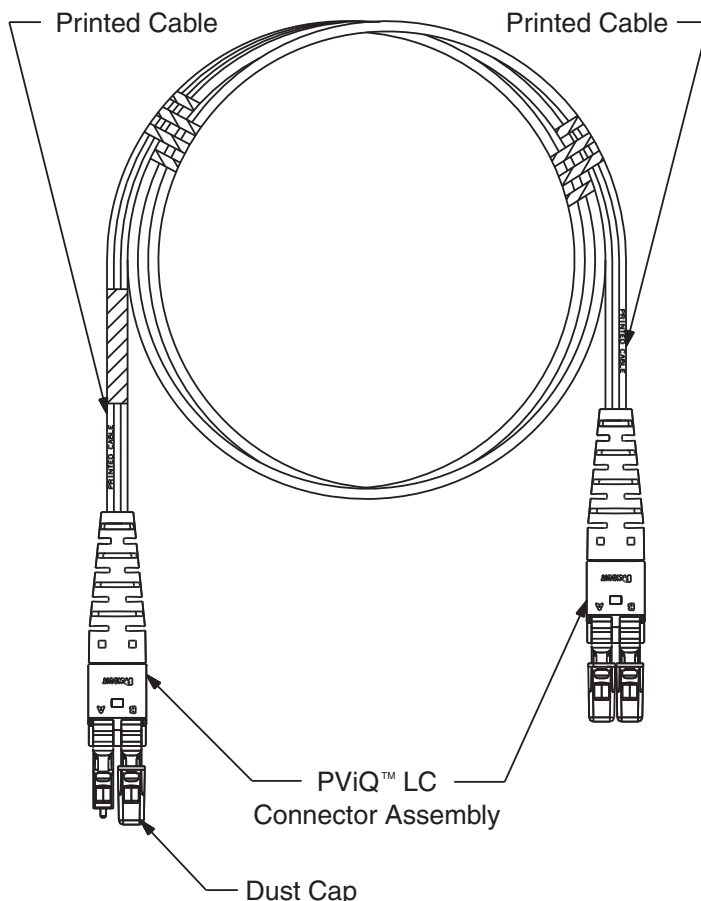

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

©2013 Panduit Corp.
ALL RIGHTS RESERVED.
PVSP95--WW-ENG
Replaces WW-PVSP12
11/2013

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fiber Optic Cables](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[FPD01SBS200](#) [FPD06SCC200](#) [FPT01SBS200](#) [FQZ-12-10](#) [FXL12D5-5F40](#) [FXO12D5-5F10Y](#) [FXO12D5-5F19Y](#) [B96566](#) [FPDK01SCC100](#)
[HFBR-RSD005Z](#) [FX2ELQ1Q1SNM4.5](#) [FX2ELQ1Q1SNM5.5](#) [FX2ELQ1Q1SNM6.5](#) [FX2ELQ1Q1SNM7.5](#) [FX2ELQ1Q1SNM8.5](#)
[FX2ELQ1Q1SNM9.5](#) [FX8RL7NQSVM1.5](#) [FX8RL8NQSVM1.5](#) [FX8RL7NQSVM2.5](#) [FX8RL8NQSVM2.5](#) [FX8RL7NQSVM3.5](#)
[FX8RL8NQSVM3.5](#) [FX8RL7NQSVM4.5](#) [FX8RL8NQSVM4.5](#) [F98RL5NQSQNM1.5](#) [F98RL6NQSQNM1.5](#) [F98RL5NQSQNM2.5](#)
[F98RL6NQSQNM2.5](#) [F98RL5NQSQNM3.5](#) [F98RL6NQSQNM3.5](#) [F98RL5NQSQNM4.5](#) [F98RL6NQSQNM4.5](#) [FZ8RL7NQSVM1.5](#)
[FZ8RL8NQSVM1.5](#) [FZ8RL7NQSVM2.5](#) [FZ8RL8NQSVM2.5](#) [FZ8RL7NQSVM3.5](#) [FZ8RL8NQSVM3.5](#) [FZ8RL7NQSVM4.5](#)
[FZ8RL8NQSVM4.5](#) [F9TRL5NQSSNM1.5](#) [F9TRL5NQSSNM2.5](#) [F9TRL5NQSSNM3.5](#) [F9TRL5NQSSNM4.5](#) [F9TRL6NQSSNM1.5](#)
[F9TRL6NQSSNM2.5](#) [F9TRL6NQSSNM3.5](#) [F9TRL6NQSSNM4.5](#) [FXTRL8NQSONM1.5](#) [FZTRL8NQSONM1.5](#)