

# Pan-Steel® Stainless Steel Fully Coated\* Ties and Tools System



When operating in oil and gas, shipbuilding, or industrial environments, maintaining a safe and secure physical infrastructure is a difficult challenge. Panduit delivers innovative solutions that mitigate risk across power, control, communication, security, and computing throughout the physical infrastructure.

Pan-Steel® Stainless Steel Fully Coated Ties provide the strength of steel and the protection of a polyester coating when strength, vibration, salt spray, UV radiation, weathering, corrosion, or temperature extremes are a concern. Panduit offers these ties in a variety of colors to maximize identification effectiveness and employee safety. Panduit industry leading installation tools are designed to reduce operator fatigue, promote worker safety, and improve productivity. Pan-Steel® Stainless Steel Fully Coated Ties and Tools System provides reliable, long term bundling throughout the physical infrastructure, contributing to lower operational costs.

\*The tie body is fully coated. The locking head is not coated.

## Key Features

## Benefits

<b>316 stainless steel with polyester coating</b>	Superior corrosion resistance provides maximum performance and longer service life in harsh environments, improving the reliability of your infrastructure
<b>Available in six colors (heavy cross section only)</b>	Provides for visual color designation of key infrastructure elements, enhancing safety and reducing operational costs
<b>Self-locking head design</b>	Tie locks immediately with no fold over or additional installation steps, lowering installed costs by up to 65%; three times quicker to install than conventional strapping
<b>Smooth surfaces and rounded edges</b>	Assures worker safety and bundle protection from abrasion during and after installation
<b>Available in four widths (black only)</b>	Standard cross section 0.18" (4.6mm), heavy cross section 0.31" (7.9mm), extra-heavy cross section .50" (12.7mm) and a super-heavy cross section .625" (15.9mm) offer flexibility in selecting the optimum size and strength for the application
<b>Meets stringent shipbuilding specifications</b>	Super-heavy 0.625" (15.9mm) ties can be used in place of conventional strapping for offshore and shipbuilding applications to dramatically speed installation time and lower installed costs

## Technical Information


<b>Material:</b>	316 stainless steel base metal with low-smoke, halogen-free polyester coating
<b>Temperature:</b>	-40°F (-40°C) to 302°F (150°C)
<b>Salt spray:</b>	Polyester coated ties tested for 2000 hours with no degradation

# Pan-Steel® Stainless Steel Fully Coated Ties and Tools System

## Six Color choices... Same Superior Performance

The same polyester coating that provides additional edge protection and prevents galvanic corrosion between dissimilar metals is now available in six vibrant colors to improve employee safety and identify key infrastructure elements. Incorporating these visually distinctive and readily identifiable stainless steel cable ties can mitigate risk by safely securing and identifying critical power, control, communications, and security cables used throughout the physical infrastructure.

### Sample Color Coding:

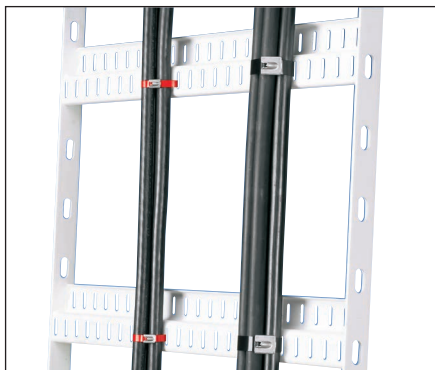

#### Application

Fire protection cabling secured to a cable tray



#### Application




Secure metal shield over pipe insulation



#### Application

Electrical cabling secured to cable tray in harsh environments

### Six total color options accommodate a variety of bundling applications throughout the physical infrastructure:

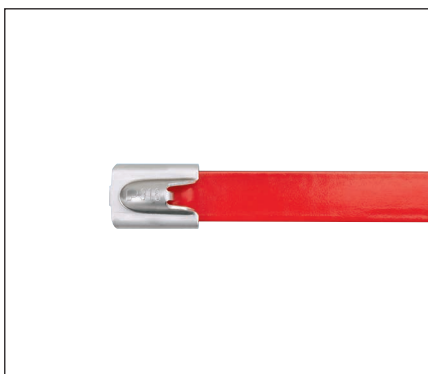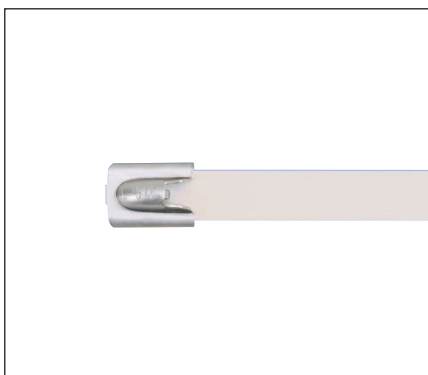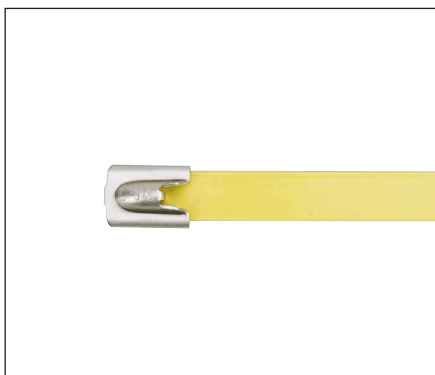

# Pan-Steel® Stainless Steel Fully Coated Ties and Tools System



- Polyester coating available in six color options provides visual indication for easy identification in color-coding applications (heavy cross section only)
- Self-locking head design speeds installation and locks into place at any length along the tie body
- Polyester coating provides additional edge protection and prevents corrosion between dissimilar metals
- AISI 316 stainless steel for the most corrosive environments
- Available in standard, heavy, extra-heavy and super-heavy cross sections
- UV resistant, low smoke, halogen-free material
- Temperature tolerance  
-40°F (-40°C) to 302°F (150°C)

Part Number	Max. Bundle Diameter		Length*		Color	Min. Loop Tensile Strength**		Min. Bundle Diameter		Width		Base Material Thickness±		Recommended Installation Tool***	Std. Pkg. Qty.^	Std. Ctn. Qty.
	In.	mm	In.	mm		Lbs.	N	In.	mm	In.	mm	In.	mm			
<b>Standard Cross Section</b>																
<b>MLTFC2S-CP316</b>	2.0	51	7.9	201	Black	100	445	0.50	12.7	0.18	4.6	0.010	0.25	GS4MT-E, HTMT, ST2MT	100	500
<b>MLTFC4S-CP316</b>	4.0	102	14.3	362												
<b>MLTFC6S-CP316</b>	6.0	152	20.5	521												
<b>MLTFC8S-CP316</b>	8.0	203	26.8	679												
<b>Heavy Cross Section</b>																
<b>MLTFC2H-LP316RD</b>	2.0	51	7.9	201	Red	250	1112	0.50	12.7	0.31	7.9	0.010	0.25	GS4MT-E, HTMT, ST2MT	50	250
<b>MLTFC4H-LP316RD</b>	4.0	102	14.3	362												
<b>MLTFC6H-LP316RD</b>	6.0	152	20.5	521												
<b>MLTFC2H-LP316YL</b>	2.0	51	7.9	201	Yellow											
<b>MLTFC4H-LP316YL</b>	4.0	102	14.3	362												
<b>MLTFC6H-LP316YL</b>	6.0	152	20.5	521												
<b>MLTFC2H-LP316GR</b>	2.0	51	7.9	201	Green											
<b>MLTFC4H-LP316GR</b>	4.0	102	14.3	362												
<b>MLTFC6H-LP316GR</b>	6.0	152	20.5	521												
<b>MLTFC2H-LP316BU</b>	2.0	51	7.9	201	Blue											
<b>MLTFC4H-LP316BU</b>	4.0	102	14.3	362												
<b>MLTFC6H-LP316BU</b>	6.0	152	20.5	521												
<b>MLTFC2H-LP316WH</b>	2.0	51	7.9	201	White											
<b>MLTFC4H-LP316WH</b>	4.0	102	14.3	362												
<b>MLTFC6H-LP316WH</b>	6.0	152	20.5	521												
<b>MLTFC2H-LP316</b>	2.0	51	7.9	201	Black											
<b>MLTFC4H-LP316</b>	4.0	102	14.3	362												
<b>MLTFC6H-LP316</b>	6.0	152	20.5	521												
<b>MLTFC8H-LP316</b>	8.0	203	26.8	679												
<b>Extra-Heavy Cross Section</b>																
<b>MLTFC2EH-LP316</b>	2.0	51	11.8	300	Black	300	1335	1.00	25.4	0.50	12.7	0.010	0.25	ST2MT, RT2HT, RT2HTN	50	250
<b>MLTFC4EH-LP316</b>	4.0	102	17.1	434												
<b>MLTFC6EH-LP316</b>	6.0	152	23.4	594												
<b>MLTFC8EH-LP316</b>	8.0	203	29.7	754												
<b>Super-Heavy Cross Section</b>																
<b>MLTFC4SH-LP316</b>	4.0	102	17.1	434	Black	450	2000	1.00	25.4	0.63	15.9	0.015	0.38	RT2HT, RT2HTN	50	250
<b>MLTFC6SH-LP316</b>	6.0	152	23.4	594												
<b>MLTFC8SH-LP316</b>	8.0	203	29.7	754												

^Order number of pieces required, in multiples of Standard Package Quantity.

\*Other lengths available, contact Panduit Customer Service.

\*\*Per SAE Standard AS231901/3 (formerly MIL).

\*\*\*For information on installation tools, refer to page 4.

±Base material less coating.

Prime items in bold.

# Pan-Steel® Stainless Steel Fully Coated Ties and Tools System

## Cable Tie Installation Tools – Selection Chart



Tool Style	GS4MT-E	RT2HT	RT2HTN	ST2MT	HTMT
<b>Gun type</b>	✓				
<b>Ratchet type</b>		✓	✓		
<b>Pliers type</b>				✓	
<b>Screwdriver type</b>					✓
<b>Installed Cross Section</b>					
<b>Standard</b>	✓			✓	✓
<b>Light-heavy</b>	✓			✓	✓
<b>Heavy</b>	✓			✓	✓
<b>Extra-heavy</b>		✓	✓	✓	
<b>Super-heavy</b>		✓	✓		
<b>Tension Control</b>					
<b>Fully adjustable</b>	✓	✓	✓		
<b>Manual</b>				✓	✓
<b>Cut-off</b>					
<b>Automatic</b>	✓				
<b>Manual</b>		✓	✓	✓	
<b>Cable Tie Entry</b>					
<b>Side</b>	✓	✓	✓	✓	
<b>Front</b>					✓
<b>Additional Features</b>					
<b>One handed operation</b>	✓			✓	✓
<b>Multi-position rear handle</b>		✓	✓		
<b>Narrow nose</b>	✓		✓		
<b>Replaceable Parts Available</b>					
<b>Replaceable cutter blade</b>	✓	✓	✓		
<b>Replaceable gripper</b>	✓			✓	

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Jalisco, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800-777-3300

**PANDUIT®**

©2018 Panduit Corp.  
ALL RIGHTS RESERVED.  
Product Bulletin Number **SSCB21--WW-ENG**  
5/2018

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Ties](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[65037-C](#) [770-1751-10](#) [REL50L0C2](#) [20093-0](#) [SF600-120X](#) [SJ3518FR-1x50](#) [SJ3526N-Beige-2"x50yd](#) [SJ3526N BLACK 58" X 50YD](#) [SJ3571](#)  
[SJ-3571-1"x50yd-Black](#) [PLT2S-C4](#) [34-455-C](#) [3722](#) [561-B110120](#) [561-N3510](#) [TYZ528M](#) [34-463-C](#) [URT20S-M](#) [06226](#) [08350-0](#) [08600-0](#)  
[08376-0](#) [10037-0](#) [10325-0](#) [10362-0](#) [10606-0](#) [1122-4JW8](#) [561-EZ250](#) [561-EZ625](#) [SJ3527N-Beige-2"x50yd](#) [SJ3527N-LOOP-BLACK-1](#)  
[SJ3572-2"x50yd-Black](#) [CF5625-000](#) [65004-C](#) [65005-C](#) [65007-C](#) [65036-C](#) [157-00039](#) [770-1708](#) [770-1753-10](#) [770-1752](#) [SPNY-041-9](#)  
[SF400-120X](#) [3719](#) [08582-0](#) [08386-0](#) [10431-0](#) [08359-0](#) [10620-0](#) [10345-0](#)