



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

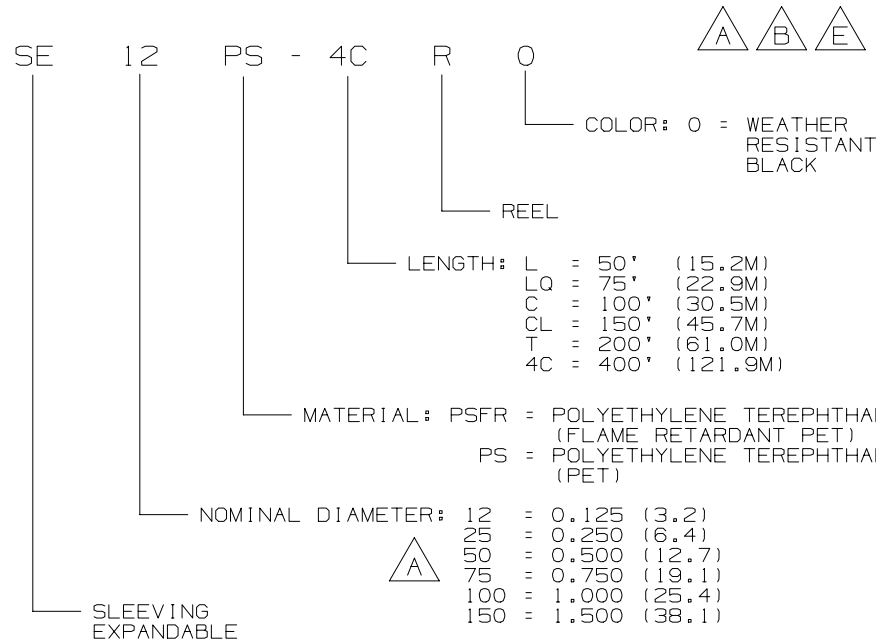

PANDUIT PART NO.	NOMINAL DIAMETER (mm)	WALL THICKNESS (IN)	BUNDLE DIA.	WEIGHT/100' (LB)
SE12____-4CRO	0.125 (3.2)	0.024 (0.61)	0.09 - 0.13 (2.37 - 6.35)	0.20
SE25____-TR0	0.250 (6.35)	0.025 (0.64)	0.19 - 0.26 (4.83 - 6.35)	0.60
SE50____-CLRO	0.500 (12.7)	0.025 (0.64)	0.44 - 0.50 (11.18 - 12.70)	1.40
SE75____-CRO	0.750 (19.05)	0.025 (0.64)	0.63 - 0.75 (16.00 - 19.05)	1.60
SE100____-CRO	1.000 (25.4)	0.038 (0.97)	0.88 - 1.00 (22.35 - 25.40)	2.00
SE150____-LQRO	1.500 (38.1)	0.038 (0.97)	1.38 - 1.50 (35.05 - 38.10)	2.70



NOTES:

1. ALL STRANDS OF THE PET SLEEVING SHALL BE THE SAME COLOR.
2. THE FLAME RETARDANT PET SHALL HAVE A WHITE TRACER.
3. REELS MAY HAVE SPLICES DEPENDING ON LENGTH:



LENGTH	20 FT	75 FT	100 FT	150 FT	200 FT	400 FT
MAX SPLICES	1	1	1	2	2	4
MAX SPLICE DISTANCE (FT)	15	20	20	25	25	25



4. SE200P ONLY OFFERED IN THE STD PET MATERIALS.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	MATERIAL:	DRAWING NUMBER:	SIZE
							PAN-WRAP BRAIDED SLEEVING	SEE PART NUMBER DESCRIPTION	14B208BB_DC	A
							CUSTOMER DRAWING			
							ITEM REVISION NAME			
							14B208BB/01			
							DATASET FILE NAME			
							14B208BB_DC/01A			
1	11.19.15	BDK	MRJS	RGRO	E. UPDATED CHART D. REDESIGNED CHART C. ADDED NOTE 4 B. ADDED BUNDLE DIAMETER A. REMOVED SE38...; SE125...; SE200... AND RESPECTIVE DETAILS	14B208BB_DC	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)			
00A	7-8-14	DJSL	VJS	JADE	DRAWING RELEASED	14B208BB_DC	.x ± N/A .xx ± N/A	.xxx ± N/A ANGLES ± N/A	THIRD ANGLE PROJECTION	14B208BB_DC
							THIRD ANGLE PROJECTION			
							DRAWN BY	DATE	CHK	SCALE
							DJSL	7-8-14	VJS	
									SHT 1 OF 1	A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Spiral Wraps, Sleeves, Tubing & Conduit](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[601203-000](#) [CTA-0053](#) [8426-11](#) [8429-9](#) [8445-7.5](#) [8450](#) [120-104-24](#) [120-113-16B](#) [120-116-1-1-09BE](#) [120-116-1-1-09BF](#) [120-116-1-1-09BP](#)
[120-116-1-1-12BE](#) [120-116-1-1-12BP](#) [120-116-1-1-20BP](#) [120-116-1-1-32BE](#) [120-117-40](#) [120-123-06](#) [120-123-10](#) [120-123-14](#) [120-123-16](#)
[120-125-12BL](#) [120-125-12R](#) [120-125-16](#) [120-125-16R](#) [120-125-16Y](#) [120-125-20R](#) [120-125-24Y](#) [120-125-28](#) [120-125-28R](#) [120-125-32](#)
[120-125-32R](#) [120-125-40](#) [120-125-56](#) [120-126-09](#) [120-126-09BL](#) [120-126-12](#) [120-126-12BL](#) [120-126-14](#) [120-126-16](#) [120-126-16BL](#) [120-](#)
[126-20](#) [120-126-20BL](#) [120-126-20R](#) [120-126-24](#) [120-126-28](#) [120-126-32](#) [120-126-40BL](#) [120-126-52](#) [120-126-52BL](#) [120-104-12](#)