# TX6A<sup>™</sup> 10Gig<sup>™</sup> UTP Patch Cords with MaTriX Technology



UTP6A\*BU

UTP6A\*\*MBU

CJ6X88TG\*\*\*

C.ID6X88TG\*\*\*

PUP6A04^-UG

PUR6A04^-UG

TX6A<sup>™</sup> 10Gig<sup>™</sup> UTP Copper Cabling System with MaTriX Technology

TX6A<sup>™</sup> 10Gig<sup>™</sup> UTP Patch Cords with MaTriX Technology

Mini-Com®TX6A<sup>™</sup> 10Gig<sup>™</sup> UTP Jack Module with MaTriX Split

TX6A<sup>™</sup> 10Gig<sup>™</sup> UTP Copper Cable with MaTriX Technology

Foot lengths:

Meter lengths:

Foil Technology

(100 meter solution)

Jack module:

iack module:

Shuttered

Plenum:

Riser:

#### specifications

Category 6A/Class E<sub>A</sub>, UTP patch cords shall be constructed of 23 AWG stranded copper cable with an enhanced performance modular plug on each end. Copper conductors in patch cable shall be twisted in pairs and separated by a quadrant separator. All four pairs shall be surrounded by matrix tape and a flame retardant jacket. The patent pending matrix tape shall suppress alien crosstalk and allow 10 Gb/s transmission. Patch cord cable shall be offered in multiple colors and lengths for design flexibility with a strain relief boot on each modular plug. All patch cords shall be compatible with both T568A and T568B wiring schemes.



### technical information

Category 6A/Class E <sub>A</sub> channel performance:	Certified channel performance in a 4-connector configuration up to 100 meters and exceeds the requirements of ANSI/TIA-568-C.2 Category 6A and ISO 11801 Class E <sub>A</sub> standards for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the Panduit <sup>®</sup> TX6A <sup>™</sup> 10Gig <sup>™</sup> UTP Copper Cabling System	
Headroom warranty:	Guaranteed performance beyond the standard when a complete end-to-end TX6A <sup>™</sup> 10Gig <sup>™</sup> UTP Copper Cabling System is installed by a Panduit certified installer	
Cable diameter:	0.275 in. (7.0mm) nominal	
FCC and ANSI compliance:	Meets all applicable ANSI/TIA-968-A requirements; contacts plated with 50 microinches of gold for superior performance	
RoHS compliance:	Compliant	
IEC compliance:	Meets IEC 60603-7	
PoE compliance:	Meets requirements of IEEE 802.3af and IEEE 802.3at for PoE applications	
UL rated:	UL 1863 approved	
Flammability rating:	СМ	

#### key features and benefits

Interoperable	Compatible with components of the TX6A-SD $^{m}$ 10Gig $^{m}$ UTP Copper Cabling System with MaTriX Technology (70 meter solution) for increased design flexibility	
MaTriX Technology	Provides superior suppression of both PSANEXT and PSAACR-F; improves the installation flexibility by allowing cable combing in existing pathways without compromising performance	
100% performance tested	Confidence that each patch cord delivers specified performance	
Superior headroom warranty	ty Provides the highest margins above the industry standard for both electrical and alien crosstalk performance	
Flexible cable design	Improved cable management in high density applications enabling easier installations	
Center de-embedded plug	Performs in center of ANSI/TIA-568-C.2 component range ensuring interoperability and superior performance	
Integral pair manager	Optimizes performance, consistency, and reliability by reducing untwist at plug	
Patented tangle-free latch	Prevents snags and provides easy release, saving time and providing reliability on frequent moves, adds, and changes	
Slender strain relief boot	Provides easy access in high-density applications	
Robust construction	Rated to 2500 mating cycles	
Identification	Provides identification of performance level, length, and quality control number for future traceability	
Variety of cable colors and lengths	Meets individual length and color-coding requirements for greater system flexibility	
Key version available	Color-specific keys with positive and negative keying features mechanically and visually distinguish connections to prevent unintentional insertion into unlike keyed or non-keyed ports, offering network design flexibility, versatility, and accommodating discrete networks for enhanced security	
Color bands (optional)	Snap onto cable, allowing additional color-coding options	
RJ45 plug lock-in device (optional)	Secures plug into jack to prevent unauthorized removal of patch cord	

#### applications

The TX6A<sup>™</sup> 10Gig<sup>™</sup> UTP Patch Cords with MaTriX Technology are a component of the TX6A<sup>™</sup> 10Gig<sup>™</sup> UTP Copper Cabling System. Interoperable and backward compatible, this end-to-end system provides design flexibility to protect network investments well into the future. Key applications include:


- 10GBASE-T Ethernet
- Data center I/O consolidation
- · Data center server virtualization
- · Consolidation of network interconnects · Back-bone aggregation
  - · Parallel processing and high speed computing

www.panduit.com

LSZH (60332-1): LSZH (60332-3): CM:	PUL6A04^-CEG PUZ6A04^-EG PUC6A04^-EG		
TX6A <sup>™</sup> 10Gig <sup>™</sup> UTP Copper Cable with MaTriX Technology (70 meter solution)			
Plenum: Riser: LSZH (60332-1): LSZH (60332-3): CM:	PUP6ASD04^-UG PUR6SDA04^-CG PUL6ASD04^-EG PUZ6ASD04^-EG PUC6ASD04^-EG		
Mini-Com <sup>®</sup> Angled M	Iodular Patch Pane		
24-port, 1 RU: 48-port, 2 RU: 72-port, 2 RU:	CPPA24FMWBLY CPPA48FMWBLY CPPLA72WBLY		
Mini-Com <sup>®</sup> Flat Mode	ular Patch Panels		
24-port, 1 RU: 48-port, 1 RU: 48-port, 2 RU: 72-port, 2 RU:	CPP24FMWBLY CPP48HDWBLY CPP48FMWBLY CPP72FMWBLY		
For additional modular p www.panduit.com	patch panels referenc		
Tools and Accessori	es		
Patch cord removal tool: Flashlight kit: Patch cord	PCRT1 KPCRT1-FL		
color band:	PCBAND^^-Q		
Standard RJ45 plug lock-in device:	PSL-DCPLX^^^		
Recessed RJ45 plug lock-in device:	PSLDCPLRX <sup>^^^</sup>		

Tor lengths 3 to 20 feet (increments of one foot) 20, 25, 30, 35, or 40 feet change the length designation in part number to the desired length. For standard cable colors other than Off White, add suffix BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) at the end of the part number. For example, the part number for a blue 15 foot patch cord is UTP6A15BU.
"For lengths 1 to 10 meters (increments of one meter) 1.5, 2.5, 15, or 20 meters, change the length designation in part number to the desired length. For standard cable colors other than Off White, add suffix BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) at the end of the part number. For example, the part number for a blue 15 meter patch cord is UTP6A15BU.
"To designate color, add suffix IW (Off White), El (Electric Ivory), WH (White), AW (Arctic White), IG (International Gray), OR (Orange), RD (Red), BU (Blue), GR (Green), YL (Yellow), or 1G (International Gray).
"Substitute PUR6A04-CG for alternative manufacturing location."
"To designate color, add suffix BU (Blue), WH (White), YL (Yellow), or 1G (International Gray), BL (Black), BU (Blue), RD (Red), YL (Yellow), OR (Green), OR (Green), YL (Yellow), GR (Green), OR (Grange), or VL (Violet) before – Q in part number. 25/package.
""For designate color, add suffix WH (White), -BU (Blue), GR (Green), -YL (Yellow), OR (Orange), -YL (Yellow), OR (Orange), -WFOr Colors other than Red, add -BL (Black), -BU (Blue), GR (Green), YL (Yellow), OR (Orange), -OR (Orange), -WI (Violet), before – Q in part number. 25/package.
""For designate color ad suffix WH (White), -BU (Blue), GR (Green), -YL (Yellow), -OR (Orange), -WI (Violet) before – Q in part number. 10/package. Add -C tor bulk packages of 100.
Contact customer service for keyed patch cords, bulk packaged jack modules, and patch cords.

## **TX6A<sup>™</sup> 10Gig<sup>™</sup> UTP Patch Cords with MaTriX Technology**

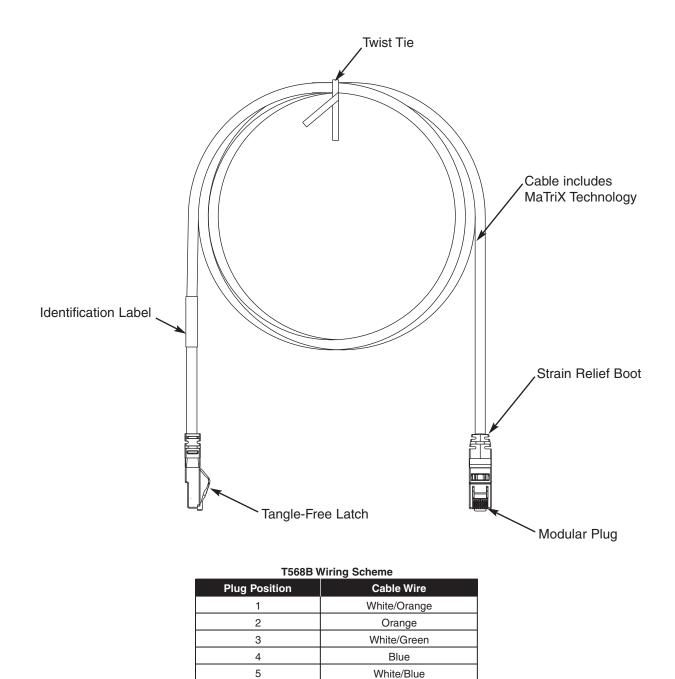

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA Markham, Ontario cs-cdn@panduit.com Phone: 800.777.3300

PANDUIT EUROPE LTD. London, UK cs-emea@panduit.com Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD. Republic of Singapore cs-ap@panduit.com Phone: 65.6305.7575

6

7

8

PANDUIT JAPAN Tokyo, Japan cs-japan@panduit.com Phone: 81.3.6863.6000

Green

White/Brown

Brown

PANDUIT LATIN AMERICA Guadalajara, Mexico cs-la@panduit.com Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia cs-aus@panduit.com Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information



Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com or by phone: 800.777.3300

©2013 Panduit Corp. ALL RIGHTS RESERVED. COSP274--WW-ENG Replaces WW-COSP195 3/2013

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ethernet Cables / Networking Cables category:

Click to view products by Panduit manufacturer:

Other Similar products are found below :

0152660053 60302002 73-7797-25 73-8890-10 73-8890-14 73-8891-14 73-8891-25 73-8892-50 73-8894-10 73-8894-3 73-8895-14 73-8896-7 MCJB2-10P6Q7-120 84909-0204 9QA0-111-12-3.00 1200650742 1200700174 1200860368 1200650013 1201080008 1-21919-1 1300500373 1300101844 1300101845 130050-0004 1300500014 1410147 E16A06002M030 E200102-009-S1 MT14-187L 17-103530 NK5EPC18RDY NK5EPC18VLY NK5EPC18YLY NK5EPC1GRY NK5EPC30BLY NK5EPC30VLY NK5EPC30YLY NK5EPC4Y NK5EPC6YLY NK5EPC8BLY NK5EPC9YLY NK6PC30BUY NK6PC30GRY NK6PC30RDY NK6PC30YLY 1969343-6 C501100010 C501106002