# TX6A™ 10Gig™ UTP Patch Cords with MaTriX Technology

### specifications

Category 6A/Class EA, UTP patch cords shall be constructed of 23 AWG stranded copper cable with an enhanced performance modular plug on each end. Copper conductors in patch cable shall be twisted in pairs and separated by a quadrant separator. All four pairs shall be surrounded by matrix tape and a flame retardant jacket. The patent pending matrix tape shall suppress alien crosstalk and allow 10 Gb/s transmission. Patch cord cable shall be offered in multiple colors and lengths for design flexibility with a strain relief boot on each modular plug. All patch cords shall be compatible with both T568A and T568B wiring schemes.



#### technical information

Category 6A/Class $E_A$ channel performance:	Certified channel performance in a 4-connector configuration up to 100 meters and exceeds the requirements of ANSI/TIA-568-C.2 Category 6A and ISO 11801 Class E <sub>A</sub> standards for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the Panduit® TX6A™ 10Gig™ UTP Copper Cabling System	
Headroom warranty:	Guaranteed performance beyond the standard when a complete end-to-end TX6A™ 10Gig™ UTP Copper Cabling System is installed by a Panduit certified installer	
Cable diameter:	0.275 in. (7.0mm) nominal	
FCC and ANSI compliance:	Meets all applicable ANSI/TIA-968-A requirements; contacts plated with 50 microinches of gold for superior performance	
RoHS compliance:	Compliant	
IEC compliance:	Meets IEC 60603-7	
PoE compliance:	Meets requirements of IEEE 802.3af and IEEE 802.3at for PoE applications	
UL rated:	UL 1863 approved	
Flammability rating:	CM	

### kev features and benefits

• •		
Interoperable	Compatible with components of the TX6A-SD™ 10Gig™ UTP Copper Cabling System with MaTriX Technology (70 meter solution) for increased design flexibility	
MaTriX Technology  PATENT PENDING	Provides superior suppression of both PSANEXT and PSAACR-F; improves the installation flexibility by allowing cable combing in existing pathways without compromising performance	
100% performance tested	Confidence that each patch cord delivers specified performance	
Superior headroom warranty	Provides the highest margins above the industry standard for both electrical an alien crosstalk performance	
Flexible cable design	Improved cable management in high density applications enabling easier installations	
Center de-embedded plug	Performs in center of ANSI/TIA-568-C.2 component range ensuring interoperability and superior performance	
Integral pair manager	Optimizes performance, consistency, and reliability by reducing untwist at plug	
Patented tangle-free latch	Prevents snags and provides easy release, saving time and providing reliability on frequent moves, adds, and changes	
Slender strain relief boot	Provides easy access in high-density applications	
Robust construction	Rated to 2500 mating cycles	
Identification	Provides identification of performance level, length, and quality control number for future traceability	
Variety of cable colors and lengths	Meets individual length and color-coding requirements for greater system flexibility	
Key version available	Color-specific keys with positive and negative keying features mechanically and visually distinguish connections to prevent unintentional insertion into unlike keyed or non-keyed ports, offering network design flexibility, versatility, and accommodating discrete networks for enhanced security	
Color bands (optional)	Snap onto cable, allowing additional color-coding options	
RJ45 plug lock-in device (optional)	Secures plug into jack to prevent unauthorized removal of patch cord	

## applications

The TX6A™ 10Gig™ UTP Patch Cords with MaTriX Technology are a component of the TX6A™ 10Gig™ UTP Copper Cabling System. Interoperable and backward compatible, this end-to-end system provides design flexibility to protect network investments well into the future. Key applications include:

- 10GBASE-T Ethernet
- Data center I/O consolidation
- Data center server virtualization
- · Consolidation of network interconnects
- · Back-bone aggregation
- · Parallel processing and high speed computing



SPECIFICATION SHEET

TX6A<sup>™</sup> 10Gig<sup>™</sup> UTP Copper Cabling System with MaTriX Technology

TX6A<sup>™</sup> 10Gig<sup>™</sup> UTP Patch Cords with MaTriX Technology

Foot lengths: UTP6A\*BU UTP6A\*\*MBU Meter lengths:

Mini-Com®TX6A™ 10Gig™ UTP Jack Module with MaTriX Split Foil Technology

Jack module: Shuttered

CJ6X88TG\*\*\*

CJD6X88TG\*\*\* iack module:

TX6A<sup>™</sup> 10Gig<sup>™</sup> UTP Copper Cable with MaTriX Technology (100 meter solution)

Plenum: PUP6A04^-UG Riser: PUR6A04^-UG LSZH (60332-1): PUL6A04^-CEG LSZH (60332-3): PUZ6A04^-EG PUC6A04^-EG

TX6A<sup>™</sup> 10Gig<sup>™</sup> UTP Copper Cable with MaTriX Technology (70 meter solution)

PUP6ASD04^-UG Plenum: PUR6SDA04^-CG Riser LSZH (60332-1): PUL6ASD04^-EG PUZ6ASD04^-EG LSZH (60332-3): PUC6ASD04^-EG

#### Mini-Com® Angled Modular Patch Panels

24-port, 1 RU: CPPA24FMWBLY 48-port, 2 RU: CPPA48FMWBLY 72-port, 2 RU: CPPLA72WBLY

#### Mini-Com® Flat Modular Patch Panels

24-port, 1 RU: CPP24FMWBLY 48-port, 1 RU: CPP48HDWBLY 48-port, 2 RU: CPP48FMWBLY 72-port, 2 RU: CPP72FMWBLY

For additional modular patch panels reference www.panduit.com

#### Tools and Accessories

Patch cord

removal tool: Flashlight kit: Patch cord color band: Standard RJ45 plug lock-in device: Recessed RJ45 plug

lock-in device:

KPCRT1-FL

PCBAND^^-Q PSL-DCPLX^^^

PSLDCPLRX^^^

\*For lengths 3 to 20 feet (increments of one foot) 20, 25, 30, 35, or 40 feet change the length designation in part number to the desired length. For standard cable colors other than Off White, add suffix BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) at the end of the part number. For example, the part number for a blue 15 foot patch coord is UTP6A15BU.

\*\*For lengths 1 to 10 meters (increments of one meter) 1.5, 2.5, 15, or 20 meters, change the length designation in part number to the desired length. For standard cable colors other than Off White, add suffix BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) after the M in the part number. For example, the part number for a blue 15 meter patch cord is UTP6A15MBU.


\*\*\*To designate color, add suffix IW (Off White), IG (International Gray), OR (Orange), RD (Red), BU (Blue), GR (Green), YL (Yellow), or VL (Violet).

\*\*To designate color, add suffix BU (Blue), WH (White), YL (Yellow), or IG (International Gray).

\*\*Substitute PUR6A04\*CG for alternative manufacturing location.

\*\*To designate color, add suffix WH (White), EI (Electric Ivory), IG (International Gray), BU (Blue), RD (Red), YL (Yellow), GR (Green), PD (Red), PD (

# TX6A™ 10Gig™ UTP Patch Cords with MaTriX Technology

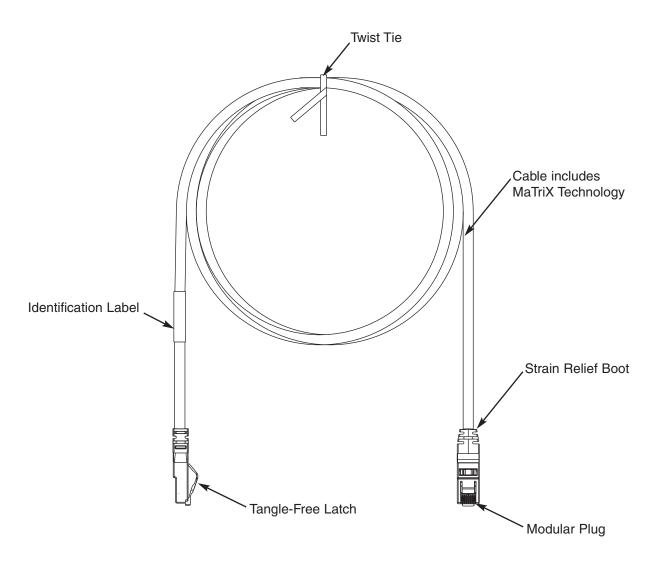

#### **T568B Wiring Scheme**

1300B WITHING Scheine		
Plug Position	Cable Wire	
1	White/Orange	
2	Orange	
3	White/Green	
4	Blue	
5	White/Blue	
6	Green	
7	White/Brown	
8	Brown	

#### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA Markham, Ontario cs-cdn@panduit.com Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK cs-emea@panduit.com Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD. Republic of Singapore cs-ap@panduit.com Phone: 65.6305.7575 PANDUIT JAPAN Tokyo, Japan cs-japan@panduit.com Phone: 81.3.6863.6000 PANDUIT LATIN AMERICA Guadalajara, Mexico cs-la@panduit.com Phone: 52.33.3777.6000 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia cs-aus@panduit.com Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty



Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com or by phone: 800.777.3300 ©2013 Panduit Corp. ALL RIGHTS RESERVED. COSP274--WW-ENG Replaces WW-COSP195 3/2013



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ethernet Cables / Networking Cables category:

Click to view products by Panduit manufacturer:

Other Similar products are found below:

73-6670-7 73-6680-15 73-7797-25 MCJB2-10P6Q7-120 84909-0204 1200700174 1200860368 E16A06002M030 E200102-009-S1

AX105346-EW MT14-187L 17-103530 ERWPAB3002M005 190-038045-01 NK5EPC18RDY NK5EPC18VLY NK5EPC18YLY

NK5EPC1GRY NK5EPC4Y NK5EPC6YLY NK5EPC8BLY NK5EPC9YLY 1969343-6 C501100010 C501106002 C501106007

C501106015 C501106025 C601102010 C601104010 C601106007 C601106015 2142758-2 2168427-2 CAT1106007 21949-1 2J1866A

RJF SFTP 5E 0500 AX100351 MN14CEC/ST C501100015 C501106004 C501106010 C5F1108007 C601104004 C601106004

CA21106004 CA21106010 CA21106015 CA21109007