

# TX6A™ 10Gig UTP Patch Cords

## specifications

Category 6A/Class E<sub>A</sub> UTP patch cords shall be constructed of 24 AWG solid copper cable with an enhanced performance modular plug on each end. Copper conductors in patch cable shall be twisted in pairs and separated by a quadrant separator. All four pairs shall be surrounded by solid foil tape and a flame retardant jacket. The tape shall suppress alien crosstalk and allow 10 Gb/s transmission. Patch cord cable shall be offered in multiple colors and lengths for design flexibility with a strain relief boot on each modular plug. All patch cords shall be compatible with both T568A and T568B wiring schemes.



## technical information

<b>Category 6A/Class E<sub>A</sub> performance:</b>	Exceeds all ANSI/TIA-568.2-D Category 6A and ISO 11801 Class EA electrical performance requirements for frequencies up to 500 MHz.
<b>Headroom warranty:</b>	Guaranteed performance beyond the standard when a complete end-to-end TX6A™ 10Gig UTP Copper Cabling System is installed by a Panduit certified installer
<b>Cable diameter:</b>	0.250 in. (6.4mm) nominal
<b>FCC and ANSI compliance:</b>	Meets ANSI/TIA-1096-A requirements (formerly FCC Part 68); contacts plated with 50 microinches of gold for superior performance
<b>RoHS compliance:</b>	Compliant
<b>IEC compliance:</b>	Meets IEC 60603-7
<b>PoE compliance:</b>	Compliant with IEEE 802.3af / 802.3at and 802.3bt type 3 and type 4
<b>UL rated:</b>	UL 1863 approved
<b>Flammability rating:</b>	CM

## key features and benefits

<b>100% performance tested</b>	Confidence that each patch cord delivers specified performance
<b>Superior headroom warranty</b>	Provides the highest margins above the industry standard for both electrical and alien crosstalk performance
<b>Flexible cable design</b>	Improved cable management in high density applications enabling easier installations
<b>Center de-embedded plug</b>	Performs in center of ANSI/TIA-568.2-D component range ensuring interoperability and superior performance
<b>Integral pair manager</b>	Optimizes performance, consistency, and reliability by reducing untwist at plug
<b>Patented tangle-free latch</b>	Prevents snags and provides easy release, saving time and providing reliability on frequent moves, adds, and changes
<b>Slender strain relief boot</b>	Provides easy access in high-density applications
<b>Robust construction</b>	Rated to 2500 mating cycles
<b>Identification</b>	Provides identification of performance level, length, and quality control number for future traceability
<b>Variety of cable colors and lengths</b>	Meets individual length and color-coding requirements for greater system flexibility
<b>Color bands (optional)</b>	Snap onto cable, allowing additional color-coding options
<b>RJ45 plug lock-in device (optional)</b>	Secures plug into jack to prevent unauthorized removal of patch cord

## applications

The TX6A™ 10Gig UTP Patch Cords are a component of the TX6A™ 10Gig UTP Copper Cabling System. Interoperable and backward compatible, this end-to-end system provides design flexibility to protect network investments well into the future. Key applications include:

- 10GBASE-T Ethernet
- Data center I/O consolidation
- Data center server virtualization
- Consolidation of network interconnects
- Back-bone aggregation
- Parallel processing and high speed computing

### TX6A™ 10Gig UTP Patch Cords

<b>Foot lengths:</b>	UTP6AX*BU
<b>Meter lengths:</b>	UTP6AX**MBU
<b>Tools and Accessories</b>	
<b>Patch cord removal tool:</b>	PCRT1
<b>Flashlight kit:</b>	KPCRT1-FL
<b>Patch cord color band:</b>	PCBAND^^-Q
<b>Standard RJ45 plug lock-in device:</b>	PSL-DCPLX^^^
<b>Recessed RJ45 plug lock-in device:</b>	PSLDCPLRX^^^

\*For lengths, 1 to 29 feet (increments of 1 foot), 30-50 feet (in 5 foot increments) change the length designation in part number to the desired length. For standard cable colors other than Blue, replace suffix; BL (Black), GY (Gray), GR (Green), RD (Red), YL (Yellow), OR (Orange), VL (Violet), or Blank (Off White). For example, the part number for a Black 15 foot patch cord is UTP6A15BL.


\*For lengths, 0.2m, 0.5m-5m (in 0.5m increments), 6m-15m (in 1m increments), and 20m change the length designation in part number to the desired length. For standard cable colors other than blue, replace suffix; BL (Black), GY (Gray), GR (Green), RD (Red), YL (Yellow), OR (Orange), VL (Violet), or Blank (Off White). For example, the part number for a Black 15 meter patch cord is UTP6A15MBL.

^^To designate color, add suffix WH (White), EI (Electric Ivory), IG (International Gray), BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange), or VL (Violet) before - Q in part number. 25/package.

^^^For colors other than Red, add -BL (Black), -BU (Blue), -GR (Green), -YL (Yellow), -OR (Orange), -IW (International White), or -IG (International Gray) to the end of the part number. 10/package. Add -C for bulk packages of 100.

♦Lengths 1m to 15m or 6 inch to 49 feet are guaranteed to meet TIA and ISO component and channel requirements. Lengths greater than 15m or 49 feet are guaranteed to meet ISO component and both TIA and ISO channel requirements.

# TX6A™ 10Gig UTP Patch Cords

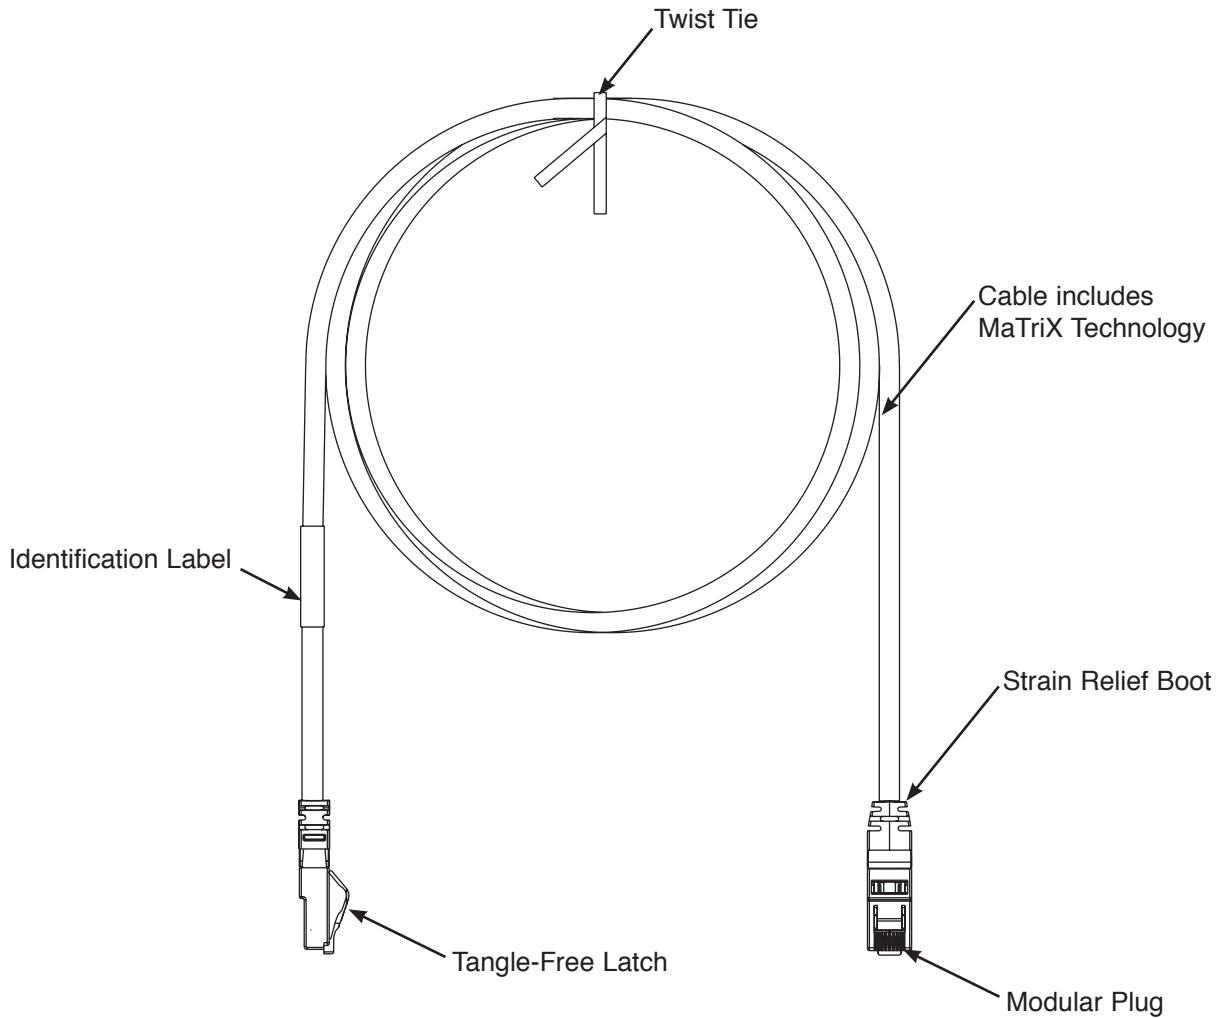

T568B Wiring Scheme	
Plug Position	Cable Wire
1	White/Orange
2	Orange
3	White/Green
4	Blue
5	White/Blue
6	Green
7	White/Brown
8	Brown

## WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

# PANDUIT®

For more information  
Visit us at [www.panduit.com](http://www.panduit.com)  
Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

© 2020 Panduit Corp.  
ALL RIGHTS RESERVED.  
Printed in the U.S.A.  
COSP496--WW-ENG  
9/2020

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Cables / Networking Cables](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[73-7797-25](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1200700174](#) [1200860368](#) [1410147](#) [E16A06002M030](#) [E200102-009-S1](#) [AX105346-EW](#)  
[MT14-187L](#) [17-103530](#) [190-038045-01](#) [NK5EPC18RDY](#) [NK5EPC18VLY](#) [NK5EPC18YLY](#) [NK5EPC1GRY](#) [NK5EPC4Y](#) [NK5EPC6YLY](#)  
[NK5EPC8BLY](#) [NK5EPC9YLY](#) [1969343-6](#) [C501100010](#) [C501106002](#) [C501106007](#) [C501106015](#) [C501106025](#) [C601102010](#) [C601104010](#)  
[C601106007](#) [C601106015](#) [2142758-2](#) [2168427-2](#) [CAT1106007](#) [21949-1](#) [2J1866A](#) [RJF SFTP 5E 0500](#) [AX100351](#) [MN14CEC/ST](#)  
[C501100015](#) [C501106004](#) [C501106010](#) [C5F1108007](#) [C601104004](#) [C601106004](#) [CA21106004](#) [CA21106010](#) [CA21109007](#) [CA21109010](#)  
[UTPCH14GY](#) [45-5684](#)