



# PJSRV05-4

## LOW CAPACITANCE TVS DIODE ARRAY

The PJSRV05-4 has a low capacitance of 1.2pF and operates with virtually no insertion loss to 1GHz. This makes the device ideal for protection of high-speed data lines such as USB2.0, firewire, DVI, and gigabit Ethernet interfaces. The low capacitance array configuration allows the user to protect Four high-speed data or transmission lines. The low inductance construction minimizes voltage overshoot during high current surges. They may be used to meet the ESD immunity requirements of IEC61000-4-2, Level 4 (15kV air, 8kV contact discharge).

<b>VOLTAGE</b>	<b>5 Volt</b>	<b>POWER</b>	<b>350 Watt</b>
----------------	---------------	--------------	-----------------


<b>SOT-23 6L</b>	Unit : inch(mm)
------------------	-----------------

### FEATURES

- IEC61000-4-2 ESD 15kV Air, 8kV Contact compliance
- Low leakage current, maximum of 1µA at rated voltage
- Low clamping voltage
- Peak power dissipation of 350W under 8/20µs waveform
- Protect four I/O lines
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

### MECHANICAL DATA

- Case : SOT-23 6L, Plastic
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx weight : 0.0005 ounces, 0.014 grams
- Marking : 054

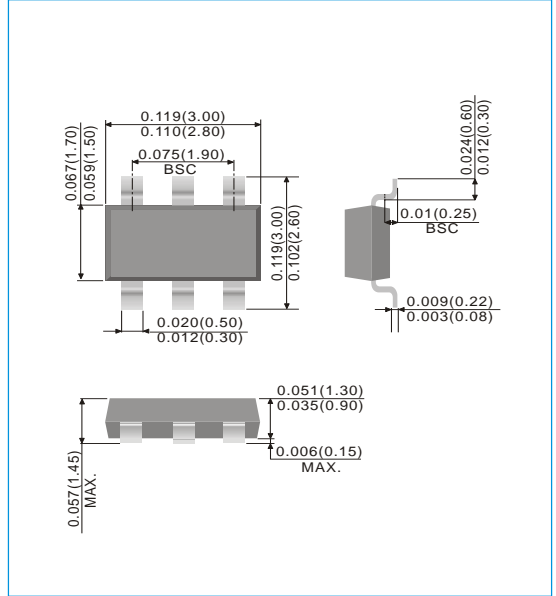

### APPLICATIONS

- USB 2.0 Power and Data Line Protection
- Video Graphics Cards
- Monitors and Flat Panel Displays
- Digital Video Interface (DVI)
- 10/100/1000 Ethernet
- ATM Interfaces




Fig.70(TOP VIEW)

### MAXIMUM RATINGS

Rating	Symbol	Value	Units
Peak Pulse Power (8/20 µs Waveform)	PPP	350	W
Peak Pulse Current (8/20 µs Waveform)	I PPM	12	A
ESD Voltage (HBM Contact)	V <sub>ESD</sub>	>8	kV
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150	°C



## PJSRV05-4

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	$V_{WRM}$		-	-	5	V
Reverse Breakdown Voltage	$V_{BR}$	$I_{BR}=1mA$ , PIN 5 to 2	6	-	-	V
Reverse Leakage Current	$I_R$	$V_R=5V$ , PIN 5 to 2	-	1.2	5	$\mu A$
Clamping Voltage (8/20 $\mu s$ )	$V_C$	$I_{PP}=1A$ , ANY I/O pin to pin 2	-	-	12	V
Clamping Voltage (8/20 $\mu s$ )	$V_C$	$I_{PP}=5A$ , ANY I/O pin to pin 2	-	-	17	V
Off State Junction Capacitance	$C_J$	0Vdc, f=1.0MHz between I/O lines and GND	-	1.1	1.2	pF
Off State Junction Capacitance	$C_J$	0Vdc, f=1.0MHz between I/O lines	-	0.55	0.60	pF



# PJSRV05-4

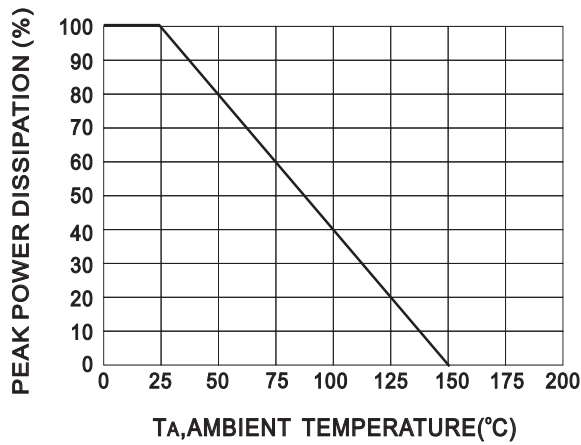


Fig 1. Power Derating Curve

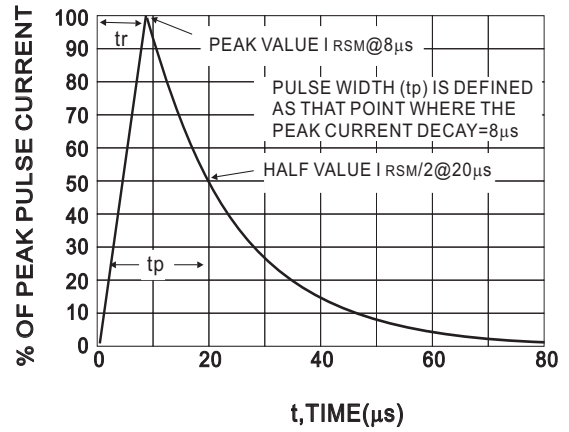


Fig 2. 8x20µs Pulse Waveform

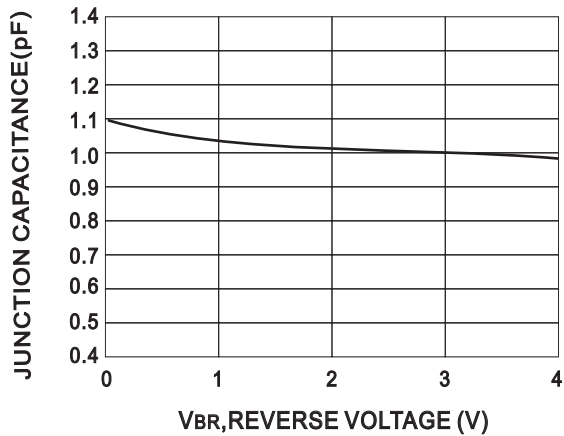


Fig 3. Junction Capacitance vs Reverse Voltage

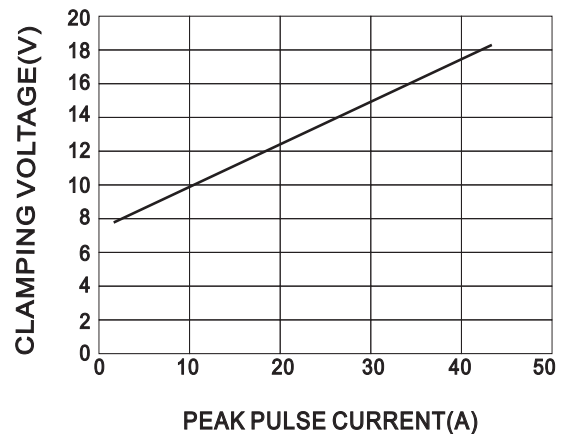


Fig 4. Clamping Voltage vs Peak Pulse Current (8x20µs Waveform)

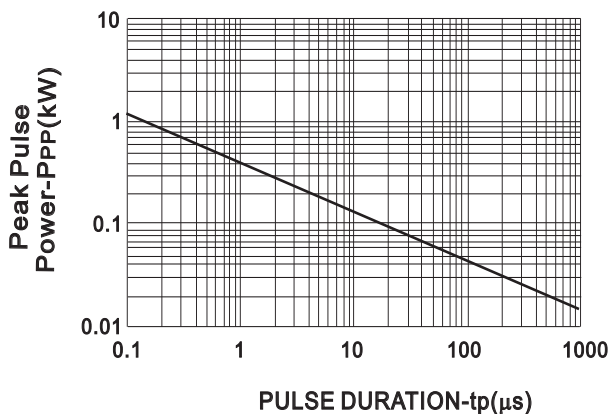


Fig 5. Non-Repetitive Peak Pulse vs. Pulse Time


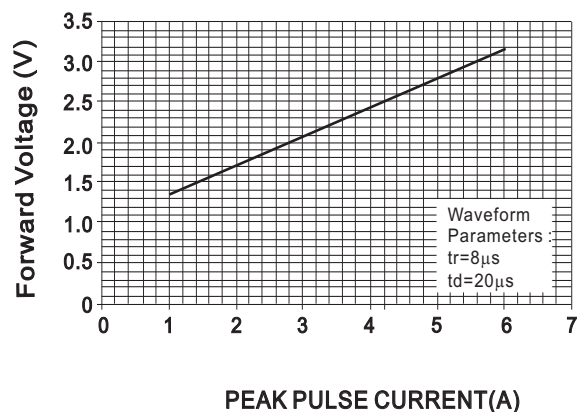


Fig 6. Forward Voltage vs. Forward Current



# PJSRV05-4

## MOUNTING PAD LAYOUT

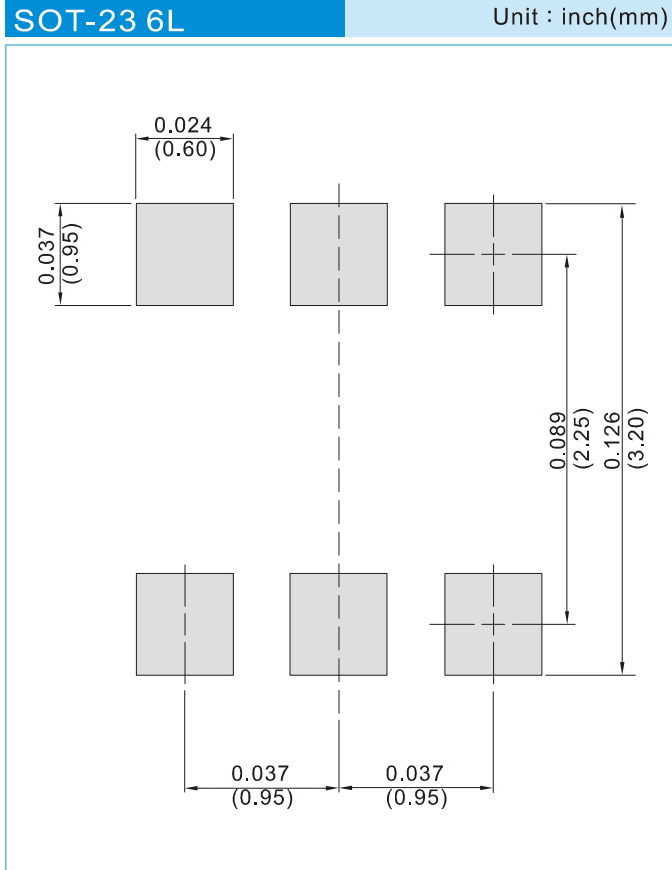

## ORDER INFORMATION

- Packing information  
T/R - 10K per 13" plastic Reel  
T/R - 3K per 7" plastic Reel



# PJSRV05-4

## Part No\_packing code\_Version

PJSRV05-4\_R1\_00001


PJSRV05-4\_R2\_00001

PJSRV05-4\_S1\_00001

PJSRV05-4\_S2\_00001

For example :

**RB500V-40\_R2\_00001**

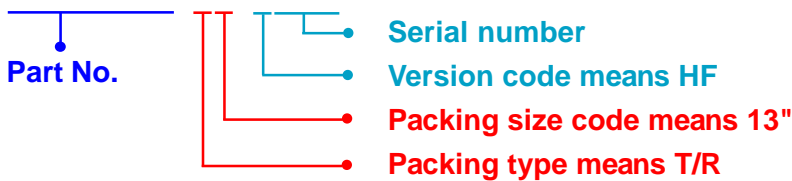

Packing Code XX				Version Code XXXXX		
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



## PJSRV05-4

---

### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Panjit](#) manufacturer:*

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)  
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#) [MPLAD30KP24A](#)  
[ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-](#)  
[TP](#) [MMAD1108E3/TR13](#) [D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA](#)  
[BK](#) [CPDQC3V3C-HF](#) [CPDQC12VE-HF](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)  
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D5V0F6U8LP33-7](#) [TVS5501V10MUT5G](#) [5.0SMLJ24CA-TP](#) [SMAJ110CA-TP](#) [MPLAD15KP75CAE3](#)  
[MMAD1103e3/TR13](#) [DFLT40AQ-7](#)