



## **QRT1506/QRT1506F/QRT1506D**

### **PLANAR STRUCTURED SUPERFAST RECOVERY RECTIFIERS**


**VOLTAGE** **600 Volt**    **CURRENT** **15 Ampere**

#### **FEATURES**

- Planar structure with EPI wafer
- Hyperfast recovery time, reduced Qrr and soft recovery
- For PFC CCM operation
- Low leakage current
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Flame Retardant Epoxy Molding Compound
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

#### **MECHANICAL DATA**

- Case: TO-220AC, ITO-220AC, TO-263 package
- Terminals: Lead solderable per MIL-STD-750, Method 2026
- TO-220AC Weight: 0.067 ounces, 1.89 grams
- ITO-220AC Weight: 0.055 ounces, 1.56 grams
- TO-263 Weight: 0.051 ounces, 1.46 grams

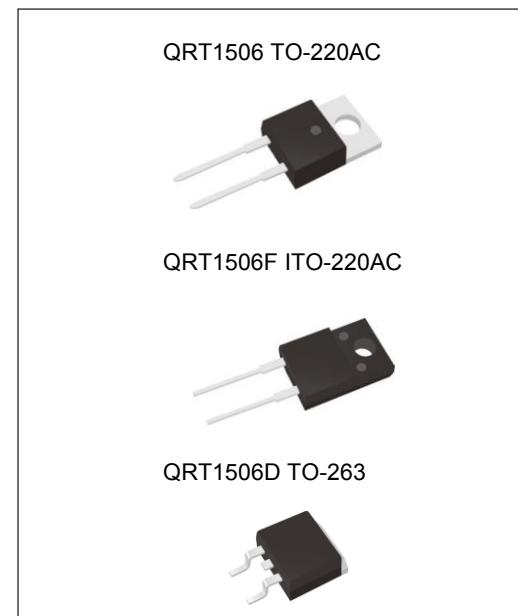

#### **MAXIMUM RATINGS( $T_A=25^\circ\text{C}$ unless otherwise noted)**

PARAMETER	SYMBOL	VALUE	UNIT
Maximum recurrent peak reverse voltage	$V_{RRM}$	600	V
Maximum rms voltage	$V_{RMS}$	420	V
Maximum dc blocking voltage	$V_R$	600	V
Maximum average forward rectified current	$I_{F(AV)}$	15	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	150	A
Typical thermal resistance TO-220AC(Note 1) ITO-220AC(Note 1) TO-263 (Note 1)	$R_{θJC}$	2 5.5 2	°C/W
Operating junction temperature range	$T_J$	-55 to + 175	°C
Storage temperature range	$T_{STG}$	-55 to + 175	°C

#### **NOTE :**

1. Device mounted on a infinite heatsink , then measured the center of the marking side.



## QRT1506/QRT1506F/QRT1506D

### ELECTRICAL CHARACTERISTICS( $T_A=25^\circ C$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Breakdown voltage	$V_{BR}$	$I_R=100\mu A$	600	-	-	V
Instantaneous forward voltage	$V_F$	$I_F=1A$ $T_J=25^\circ C$	-	1	-	
		$I_F=5A$ $T_J=25^\circ C$	-	1.53	-	V
		$I_F=15A$ $T_J=25^\circ C$	-	2.13	2.35	
	$V_F$	$I_F=1A$ $T_J=125^\circ C$	-	0.64	-	
		$I_F=5A$ $T_J=125^\circ C$	-	0.97	-	V
		$I_F=15A$ $T_J=125^\circ C$	-	1.36	1.55	
Reverse leakage current	$I_R$	$V_R=600V$ $T_J=25^\circ C$ $T_J=125^\circ C$	-	-	3 100	$\mu A$
Reverse recovery time	$T_{RR}$	$I_F=0.5A$ $I_R=1A$ $I_{RR}=0.25A$ $T_J=25^\circ C$	-	-	30	ns
		$I_F=1A$ $V_R=30V$ $di/dt=100A/\mu s$ $T_J=25^\circ C$	-	-	25	ns
		$I_F=15A$ $V_R=400V$ $di/dt=200A/\mu s$ $T_J=25^\circ C$	-	40	-	ns
Peak recovery current	$I_{RRM}$	$I_F=15A$ $V_R=400V$ $di/dt=200A/\mu s$ $T_J=25^\circ C$	-	2.5	-	A
Reverse recovery charge	$Q_{RR}$	$I_F=15A$ $V_R=400V$ $di/dt=200A/\mu s$ $T_J=25^\circ C$	-	55	-	nC



## QRT1506/QRT1506F/QRT1506D

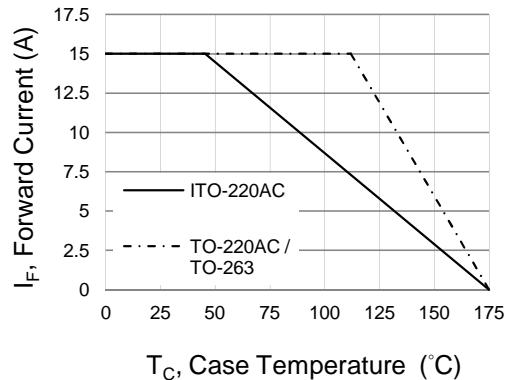


Fig.1 Forward Current Derating Curve

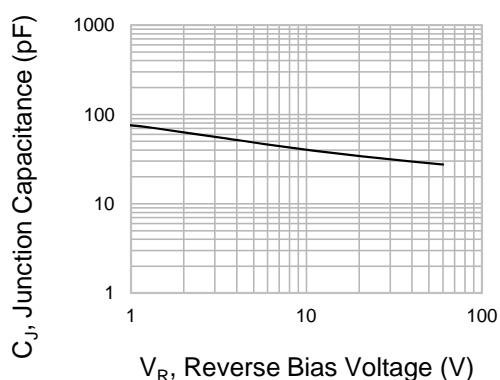


Fig.2 Typical Junction Capacitance

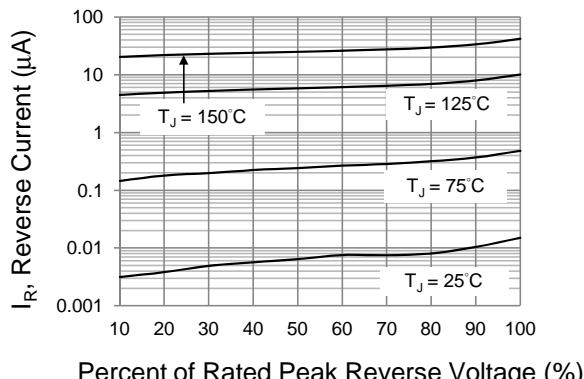


Fig.3 Typical Reverse Characteristics

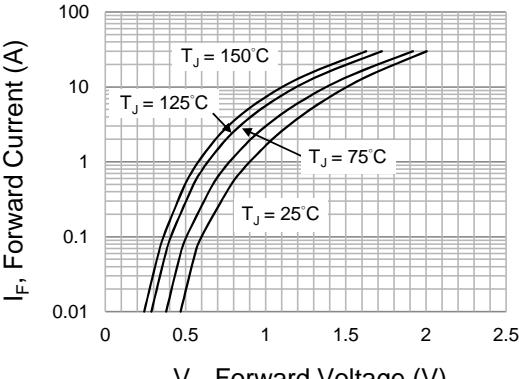


Fig.4 Typical Forward Characteristics

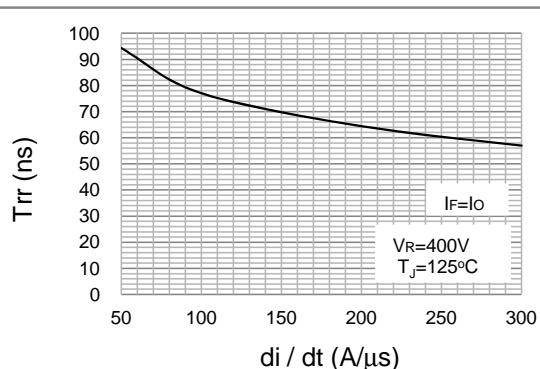


Fig.5 Typical Reverse recovery time versus di/dt

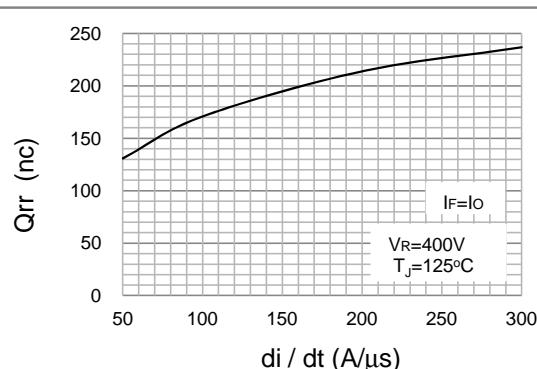



Fig.6 Typical Reverse recovery charges versus di/dt



## **QRT1506/QRT1506F/QRT1506D**


**TO-220AC**

Unit : inch(mm)

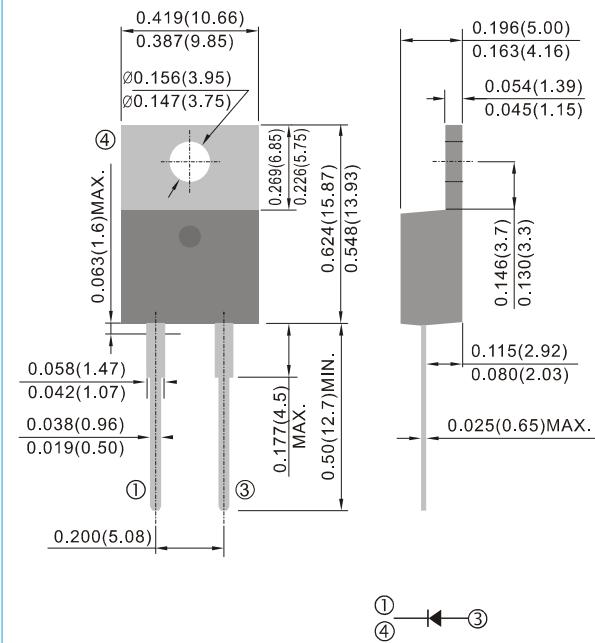



**ITO-220AC**

Unit : inch(mm)

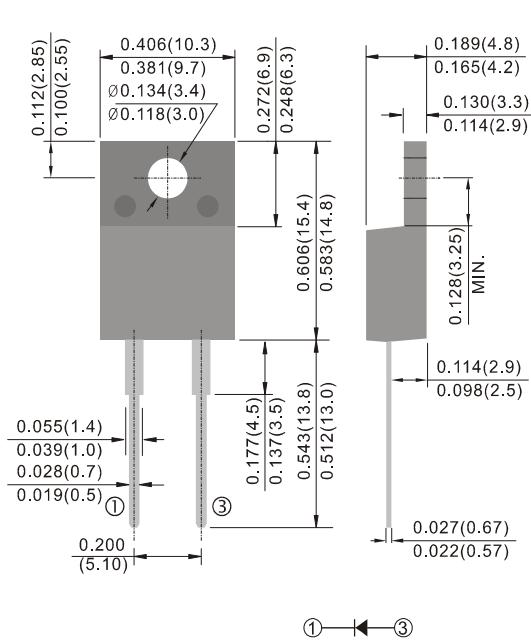

**TO-263 / D<sup>2</sup>PAK**

Unit : inch(mm)

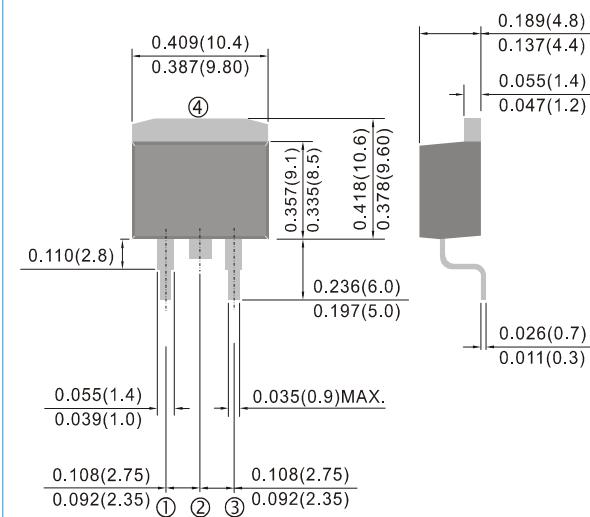




## **QRT1506/QRT1506F/QRT1506D**

---

### **MOUNTING PAD LAYOUT**

---

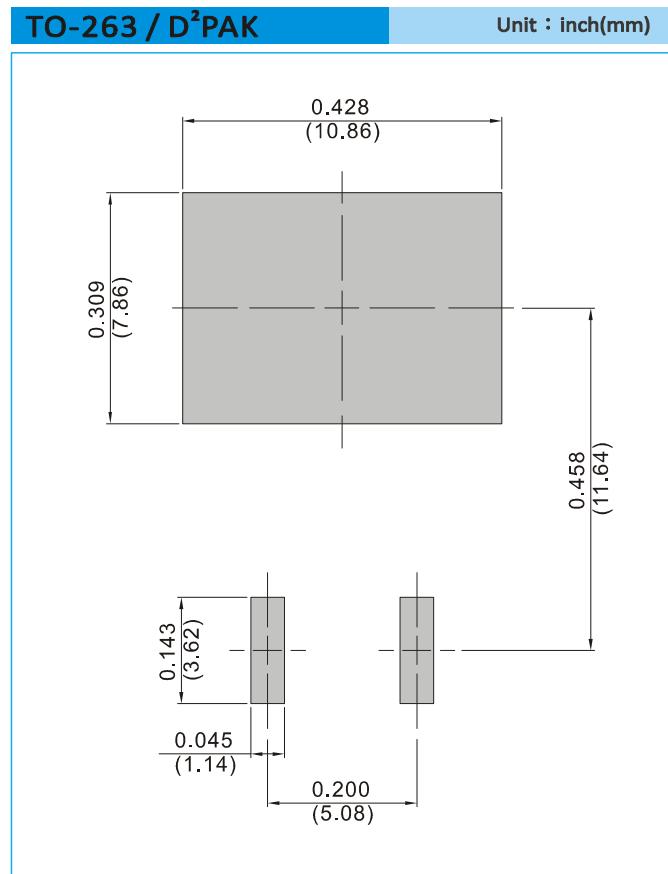

---

### **ORDER INFORMATION**

---

- Packing information  
T/R - 0.8K per 13" plastic Reel



## QRT1506/QRT1506F/QRT1506D

### Part No\_packing code\_Version

QRT1506\_T0\_00001

QRT1506F\_T0\_00001

QRT1506D\_R2\_00001

For example :

**RB500V-40\_R2\_00001**



Packing Code XX				Version Code XXXXX		
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> -5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



## **QRT1506/QRT1506F/QRT1506D**

### **Disclaimer**

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Rectifiers](#) category:***

***Click to view products by [Panjit](#) manufacturer:***

Other Similar products are found below :

[D91A](#) [DA24F4100L](#) [DD89N1600K-A](#) [DD89N16K-K](#) [RL252-TP](#) [DLA11C-TR-E](#) [DSA17G](#) [1N4005-TR](#) [BAV199-TP](#) [UFS120Je3/TR13](#)  
[JANS1N6640US](#) [VS-80-1293](#) [DD89N16K](#) [DD89N16K-A](#) [481235F](#) [DSP10G-TR-E](#) [RRE02VS6SGTR](#) [067907F](#) [MS306](#) [ND104N08K](#)  
[SPA2003-B-D-A01](#) [VS-80-6193](#) [VS-66-9903](#) [VGF0136AB](#) [US2JFL-TP](#) [UFS105Je3/TR13](#) [A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#)  
[RF301B2STL](#) [RF501B2STL](#) [UES1306](#) [UES1302](#) [BAV199E6433HTMA1](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [JANTXV1N5660A](#) [UES1106](#)  
[GS2K-LTP](#) [D126A45C](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [STTH20P035FP](#) [VS-8EWS12S-M3](#) [VS-12FL100S10](#) [ACGRA4001-HF](#)