


# SR22 THRU SR29

## MINI SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER VOLTAGE - 20 to 90 Volts CURRENT - 2.0 Amperes

### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier majority carrier conduction
- Low power loss, High efficiency
- High current capability, low  $V_F$
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260  $^{\circ}$ C/10 seconds at terminals

### SMA/DO-214AC

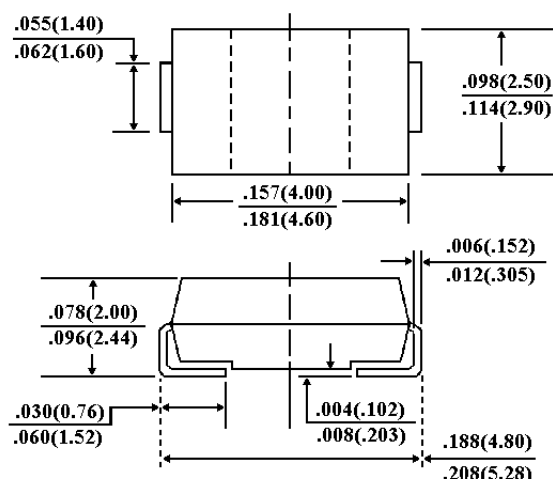

Dimensions in inches and (millimeters)

### MECHANICAL DATA

Case: JEDEC DO-214AC molded plastic

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode

Standard packaging: 12mm tape (EIA-481)

Weight: 0.002 ounce, 0.064 gram

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25  $^{\circ}$ C ambient temperature unless otherwise specified.

Resistive or inductive load.

|   | SYMBOLS                              | SR22        | SR23 | SR24 | SR25 | SR26 | SR28 | SR29  | UNITS          |
|---|--------------------------------------|-------------|------|------|------|------|------|-------|----------------|
| Maximum Recurrent Peak Reverse Voltage  | $V_{RRM}$                            | 20          | 30   | 40   | 50   | 60   | 80   | 90    | Volts          |
| Maximum RMS Voltage   | $V_{RMS}$                            | 14          | 21   | 28   | 35   | 42   | 56   | 64    | Volts          |
| Maximum DC Blocking Voltage   | $V_{DC}$                             | 20          | 30   | 40   | 50   | 60   | 80   | 90    | Volts          |
| Maximum Average Forward Rectified Current at $T_L$ (See Figure 1)                               | $I_{(AV)}$                           | 2.0         |      |      |      |      |      |       | Amps           |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method) | $I_{FSM}$                            | 50.0        |      |      |      |      |      |       | Amps           |
| Maximum Instantaneous Forward Voltage at 2.0A (Note 1)  | $V_F$                                | 0.5         |      | 0.70 |      | 0.85 |      | Volts |                |
| Maximum DC Reverse Current $T_A=25^{\circ}$ C (Note 1)  | $I_R$                                | 0.5         |      |      |      |      |      |       | mA             |
| At Rated DC Blocking Voltage $T_A=100^{\circ}$ C  |                                      | 20.0        |      |      |      |      |      |       |                |
| Maximum Thermal Resistance (Note 2)   | R $\epsilon$ KJL<br>R $\epsilon$ KJA | 17<br>75    |      |      |      |      |      |       | $^{\circ}$ C/W |
| Operating Junction Temperature Range  | $T_J$                                | -50 to +125 |      |      |      |      |      |       | $^{\circ}$ C   |
| Storage Temperature Range   | $T_{STG}$                            | -50 to +150 |      |      |      |      |      |       | $^{\circ}$ C   |

### NOTES:

1. Pulse Test with PW=300  $\mu$ g sec, 2% Duty Cycle.
2. Mounted on P.C.Board with 8.0mm<sup>2</sup> (.013mm thick) copper pad areas.

RATING AND CHARACTERISTIC CURVES

SR22 THRU SR29

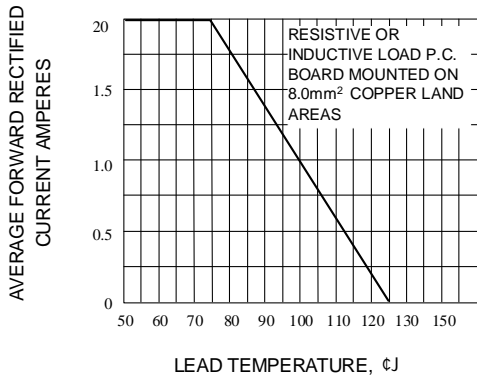


Fig. 1-FORWARD CURRENT DERATING CURVE

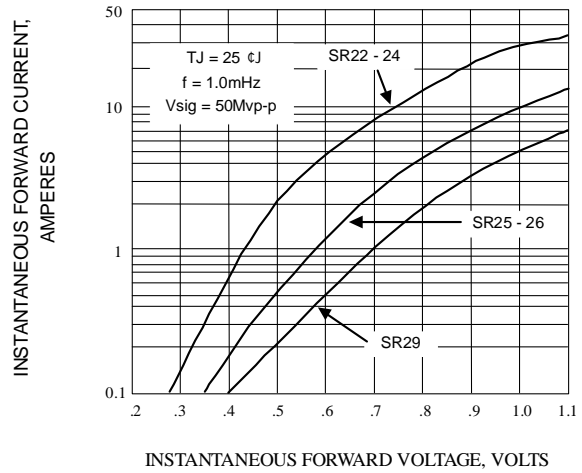


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

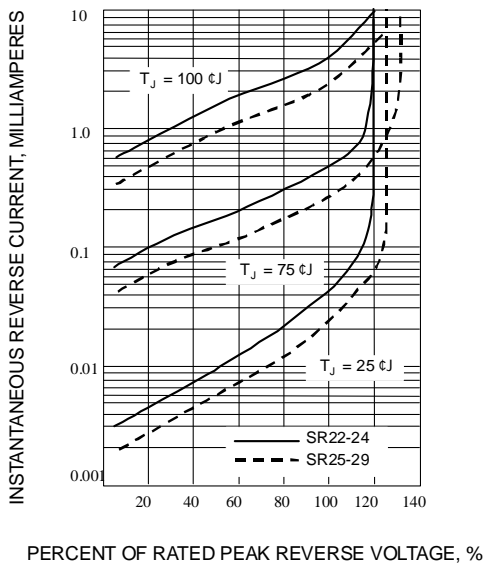


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

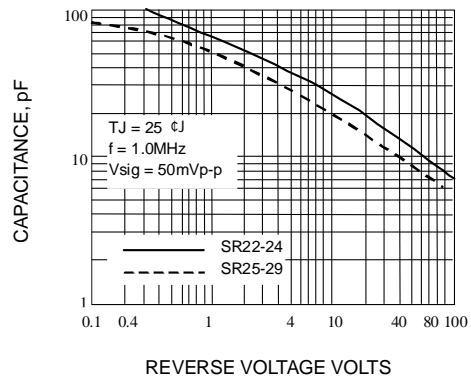


Fig. 4-TYPICAL JUNCTION CAPACITANCE

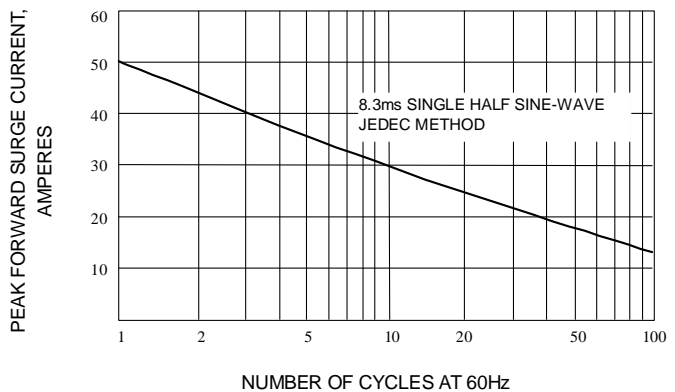


Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [Panjit](#) manufacturer:*

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)