D-SUB .318" RIGHT ANGLE PCB MOUNT



SPECIFICATIONS

Material:

Shell: Steel, tin-plated *Insulator:* PBT, glass reinforced thermoplastic, rated UL 94V-0 *Insulator color:* Black *Contacts:* Phosphor Bronze *Hardware:* Brass, nickel plated

Plating:


5 µin gold on contact area over 50 µin nickel underplate, gold flash or tin lead on solder-tails

ORDERING INFORMATION

choose one from each category as shown in sample below

DR	25S	
Series	Positions/ Gender	Options (add as suffix to part number)
DR - D-Sub Right Angle .318"	Plug: 9P, 15P, 25P, 37P Socket: 9S, 15S, 25S, 37S	 F - Fixed Jackscrews J - Removable Jackscrews Installed PF - Press Fit E - Ferrite Filter Attenuation Graph Pg.51

PLUG

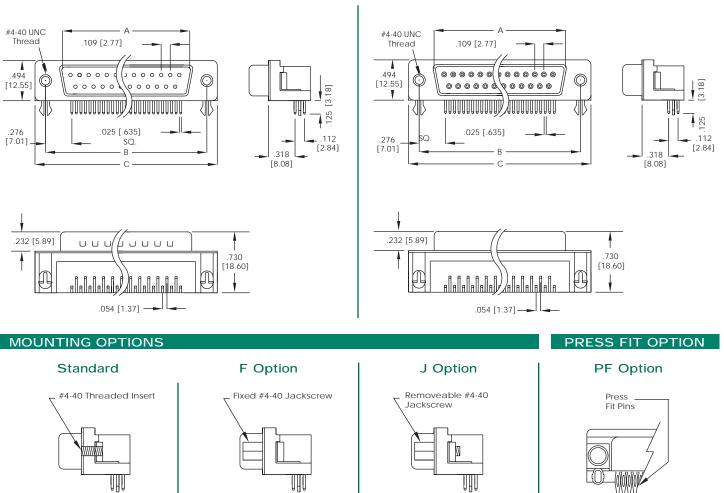

Electrical:


Operation voltage: 250 VAC max *Current rating*: 3 Amps max *Contact resistance:* 20 mΩ max





Insulation resistance: 3000 M Ω min @ 1000 VDC between adjacent contacts (75° F and 50% R.H.)

Dielectric withstanding voltage: 1000 VAC min rms (sea level)



SOCKET

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Standard Connectors category:

Click to view products by Parallax manufacturer:

Other Similar products are found below :

56F711-015 012-9507-004 LV242999-142T12 015-0341-000 015-0372-005 015-0372-008 015-8755-001 020419-0104 012-0467-000 012-0515-000 012-9507-034 012-9507-114 020745-0008 609-25P M24308/2-23Z CT2-148-2PCA34 CT2-18-11PCAU CT6-10SL-3SC CT6-10SL-4SC CT6-14S-2SC CT6E14SA7SC M83513/01-FC M83723/76W24619 L/C M85049/48-3-2F 6STD09PCM99B70X 6STD09SCM99B30X 6STD09SCT99S40X 6STD15PCT99S40X 6STD15SCM99B30X 6STD15SCT99S40X 6STF09PCM05B70X 7-135760-9 MC11E-10-6SN 747552-3 MD1-21PS MDM-15SCBRM7-F222 MDM96517-699 MDM96521-744 MDVB1-21SL1 MIK0-1-7SH003 MIKQ6-7SH076 MIKQ7-7PH077 MIKQ7-7PH11 MIKQ7-7PH32 MJSV-28SL61 MKJ4A1F14-55S 8-135760-3 8STD09PCM99B30X PG-KV/PV-16-GROM-SEALING GDA15P