
Drawing No.	Rev.	Page
CWA3S-24-CD-W18	Е	1 / 2

## **SPECIFICATIONS**

[General Specifications]				
Model		CWA3S-24-CD		
Color Code		CD		
Luminous Color		Daylight		
Color Temperature (typ.)		6500 K		
Illuminance (at 24V DC,1m)		110 lx		
Total Luminous Flux (at 24V DC)		385 lm		
Rated Voltage		24V DC (Polarized)		
Operating Voltage Range		Rated Voltage ±10%		
Signal Wire Current	Тур.	180 mA		
(Rated Current Consumption)	Max.	198 mA		
Operating Ambient Temperature		-30 °C to +60 °C		
Operating Ambient Humidity		Less than 90% (No condensation)		
Storage Ambient Temperature		-35 °C to +65 °C		
Storage Ambient Humidity		Less than 90% (No condensation)		
Mounting Direction		All Directions		
Protection Rating		IP65 (IEC 60529)		
		(Cable connection ends not included)		
Vibration Resistance		19.6 m/s <sup>2</sup>		
		(30Hz, Back and Forth, Up and Down, Left and Right for 2 hrs. each)		
Mass		215±10 g		
Outer Dimensions		Refer to the Outer Dimension Drawing		
Conformity Standards		EMC Directive (EN 55015, EN 61000-6-2)		
		RoHS Directive (EN IEC 63000)		
		UL Listed (File No.E306141)		
Remarks		Due to the inherent properties of the LED, color variations and hue may occur.		

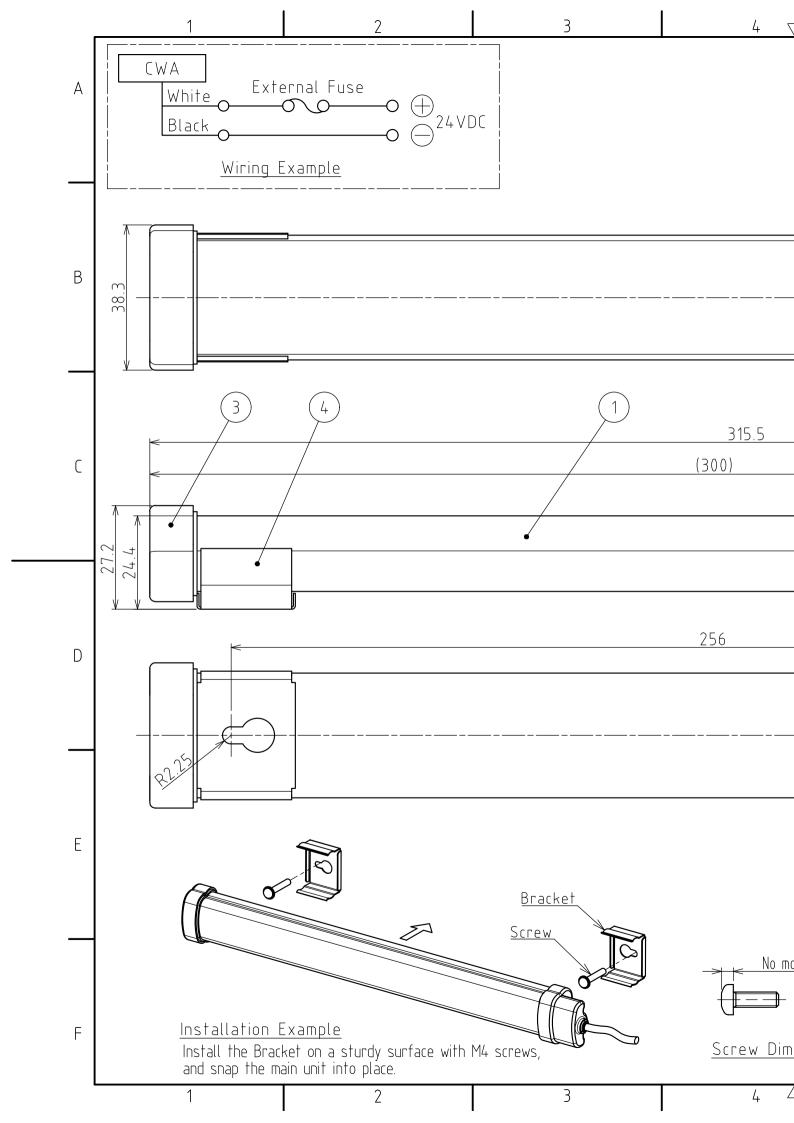

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Replacement Lamps - Based LEDs category:

Click to view products by Patlite manufacturer:

Other Similar products are found below:

LAPD-1A LAPD-1R LAPD-2R LAPD-6W LSTD-M4S SSP-1156B153S12 SSP-1157B156U12 SSP-LXS110818BA 560-0101F 560-0103F

LAPD-1W LAPD-6R 560-0104F 585-1113 SSP-LXC1283S24 SSP-3MB96U12G SLL-05EY 1.90.690.684/0000 560-0203F 586-2206
205F SSP-LXS1826U16A LATD-2JW 24LS4-G1 24LS4-R1 MF200-NFW5H MB403-W60-CW-BP 1819LS2-G-CG 387LP-R 387LP-B

387LP-W 387LP-G 6S6LS155-CWR 130MBLS-G-CG 5000404LAMP E10SB12A E10SB130A E10SB24A E10SG12A E10SG130A

E10SR12A E10SR130A E10SW12A E10SY12A E10SY130A 6S6LS130-CWW MF200-BCG12H MF200-NFR5H 24L4-B1 120PSBL
NWW MF200-NKG120