
	Drawing No. Rev. Page
	CWA9S-24-CD-W18 E 1 / 2
SPEC	CIFICATIONS
General Specifications]	
Model	CWA9S-24-CD
Color Code	CD
Luminous Color	Daylight
Color Temperature (typ.)	6500 K
Illuminance (at 24V DC,1m)	330lx
Total Luminous Flux (at 24V DC)	1155lm
Rated Voltage	24V DC (Polarized)
Operating Voltage Range	Rated Voltage ±10%
Signal Wire Current Typ.	540mA
Rated Current Consumption) Max.	594mA
Operating Ambient Temperature	-30 °C to +60 °C
Operating Ambient Humidity	Less than 90% (No condensation)
Storage Ambient Temperature	-35 °C to +65 °C
Storage Ambient Humidity	Less than 90% (No condensation)
Mounting Direction	All Directions
Protection Rating	IP65 (IEC 60529)
	(Cable connection ends not included)
Vibration Resistance	19.6 m/s <sup>2</sup>
	(30Hz, Back and Forth, Up and Down, Left and Right for 2 hrs. each)
Mass	530±25g
Outer Dimensions	Refer to the Outer Dimension Drawing
	EMC Directive (EN 55015, EN 61000-6-2)
	RoHS Directive (EN IEC 63000)
Conformity Standards	UL Listed (File No.E306141)
Conformity Standards	

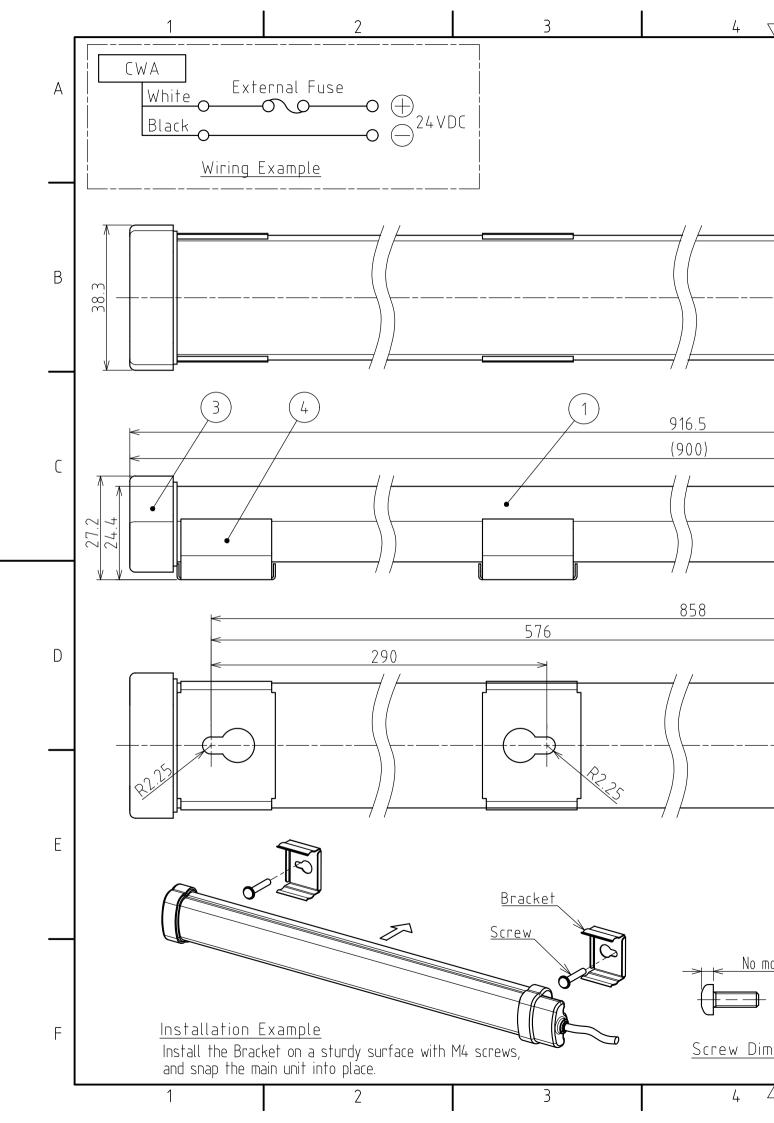

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Replacement Lamps - Based LEDs category:

Click to view products by Patlite manufacturer:

Other Similar products are found below :

LAPD-1A LAPD-1R LAPD-2R LAPD-6W LSTD-M4S SSP-1156B153S12 SSP-1157B156U12 SSP-LXS110818BA 560-0101F 560-0103F LAPD-1W LAPD-6R 560-0104F 585-1113 SSP-LXC1283S24 SSP-3MB96U12G SLL-05EY 1.90.690.684/0000 560-0203F 586-2206-205F SSP-LXS1826U16A LATD-2JW 24LS4-G1 24LS4-R1 MF200-NFW5H MB403-W60-CW-BP 1819LS2-G-CG 387LP-B 387LP-W 6S6LS155-CWR 130MBLS-G-CG 5000404LAMP E10SB12A E10SB130A E10SB24A E10SG12A E10SG130A E10SR12A E10SR130A E10SW12A E10SY12A E10SY130A 6S6LS130-CWW MF200-BCG12H MF200-NFR5H 24L4-B1 120PSBL-NWW MF200-NKG120 5SB-NFG24H MF200C-NFW28H