


# PCIE-1752 PCIE-1754 PCIE-1756

64-ch Isolated Digital Output PCI Express Card

64-ch Isolated Digital Input PCI Express Card

64-ch Isolated Digital I/O PCI Express Card

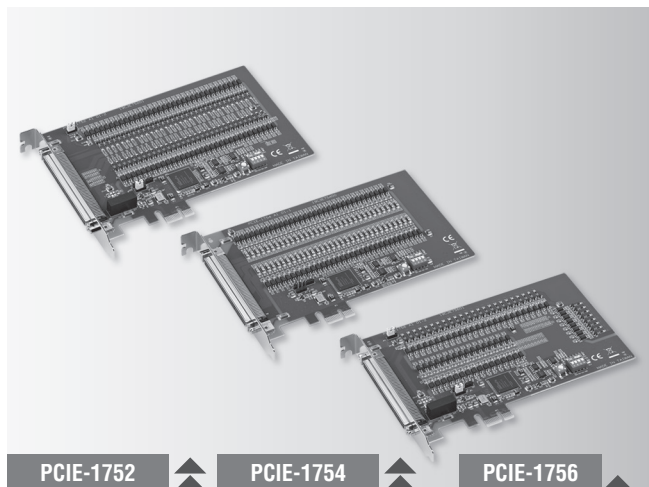

PCIE-1752

PCIE-1754

PCIE-1756



## Features

### PCIE-1752/1756

- Wide output range (5 ~ 40 V<sub>DC</sub>)
- High sink current on isolated output channels (500mA max./ch)
- 2,000 V<sub>DC</sub> ESD protection
- High-voltage isolation (2,500 V<sub>DC</sub>)
- Interrupt handling capability

### PCIE-1754/1756

- Wide input range (10 ~ 30 V<sub>DC</sub>)
- Either +/- voltage input for DI by group
- High over-voltage protection (70 V<sub>DC</sub>)
- High-voltage isolation (2,500 V<sub>DC</sub>)
- Output status read-back
- Keeps the output settings and values after system hot reset
- Channel-freeze function

## Introduction

The Advantech PCIE-1752, PCIE-1754 and PCIE-1756 series products offer 64 isolated digital input and output channels with 2,500 V<sub>DC</sub> isolation protection. They feature a wide input range (10 ~ 30 V<sub>DC</sub>), wide output range (5 ~ 40 V<sub>DC</sub>) and high sink current (500mA max./channel) can make PCIE-1752/1754/1756 series products easily used in industrial automation control systems. With the help of the latest Advantech driver - DAQNav, users can perform the configuration and setting easily and efficiently in the programming.

## Specifications

### Isolated Digital Input

- Channels** PCIE-1754: 64  
PCIE-1756: 32
- Input Voltage** Logic 0: 3 V max.  
Logic 1: 10 V min. (30 V<sub>DC</sub> max.)
- Input Current** 10 V<sub>DC</sub> @ 2.97 mA  
20 V<sub>DC</sub> @ 6.35 mA  
30 V<sub>DC</sub> @ 9.73 mA
- Interrupt Capable Ch.** PCIE-1754: 4  
PCIE-1756: 2
- Isolation Protection** 2,500 V<sub>DC</sub>
- Overvoltage Protection** 70 V<sub>DC</sub>
- ESD Protection** 2,000 V<sub>DC</sub>
- Opto-isolator Response** 50 μs

### Isolated Digital Output

- Channels** PCIE-1752: 64  
PCIE-1756: 32
- Output Type** Sink (NPN)
- Isolation Protection** 2,500 V<sub>DC</sub>
- Output Voltage** 5 ~ 40 V<sub>DC</sub>
- Sink Current** 500 mA max./channel
- Opto-isolator Response** 50 μs

### General

- Bus Type** PCI Express V1.0
- I/O Connectors** 1 x 100-pin SCSI female connector
- Dimensions (L x H)** 168 x 100 mm (6.6" x 3.9")
- Power Consumption**
  - PCIE-1752**  
Typical: 3.3 V @ 485 mA  
Max.: 3.3 V @ 530 mA; 12V @ 90 mA
  - PCIE-1754**  
Typical: 3.3 V @ 285 mA  
Max.: 3.3 V @ 330 mA
  - PCIE-1756**  
Typical: 3.3 V @ 385 mA  
Max.: 3.3 V @ 430 mA; 12V @ 55 mA
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity** 5 ~ 95% RH, non-condensing

## Ordering Information

- PCIE-1752** 64-ch Isolated Digital Output PCI Express Card
- PCIE-1754** 64-ch Isolated Digital Input PCI Express Card
- PCIE-1756** 64-ch Isolated Digital I/O PCI Express Card

### Accessories

- PCL-10250-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- PCL-10250-2E** 100-pin SCSI to Two 50-pin SCSI Cable, 2 m
- ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators
- PCL-101100M-3E** 100-pin SCSI to 100-pin SCSI Cable, 3 m
- ADAM-39100** 100-pin DIN-rail Wiring Board

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Controllers](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)  
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)  
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)  
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)  
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)  
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)