




6W Constant Current LED Driver PDA006A Waterproof LED Power Supply

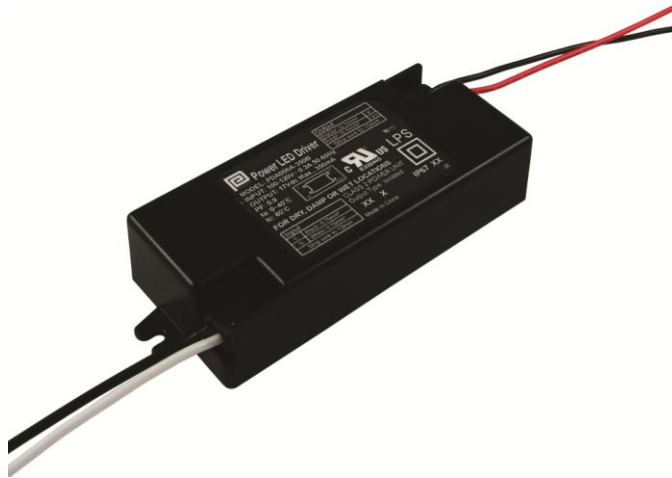

Features

- Low Profile Design
- OVP, OCP, Over-Load and Short-Circuit Protection
- Class 2 Output per UL1310
- UL 8750 Compliant
- IP67 Rated
- Brownout Protection
- ≥ 0.9 Power Factor Correction
- Very Low Leakage
- SELV Compliant
- RoHS Compliant

Applications

- Outdoor Lighting
- Indoor Lighting

Safety Approvals

- cUL/UL

Mechanical Characteristics

- Length: 105.8mm (4.17in)
- Width: 39.8mm (1.57in)
- Height: 20.8mm (0.82in)
- Weight: 101g (3.56oz)

Output Specifications

Model	DC Output Voltage			Output Current	Output Power
	Min.	Typ.	Max.		
PDA006A-350B-R	9V	-	17V	350mA	6W
PDA006A-700B-R	5V	-	8.6V	700mA	6W
PDA006A-1A0B-R	4V	-	6V	1000mA	6W

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

INPUT:

AC Input Voltage
90 to 132VAC

Nominal AC Input Voltage
110 to 120VAC

Leakage Current
<0.25mA at 120VAC and maximum load

Maximum Input Current
≤250mA at full load, 120VAC

No Load Power Draw
≤300mW at 115VAC, 60Hz

OUTPUT:

Total Output Power
6W maximum

Efficiency
≥73% at nominal input voltage, 350-700mA out
≥69% at nominal input voltage, 1000mA out

Power Factor
≥0.9 at nominal input voltage, full load

ENVIRONMENTAL:

Operating Temperature 0 to +40°C
Storage Temperature -40 to +85°C

Operating Humidity 10 to 95%

Warranty
3 Years

EMC

FCC Part 15 Class B

Immunity

EN61000-4-2
EN61000-4-5
EN61000-3-2 Class C
EN61000-3-3

Isolation Test

Primary to Secondary: 3000VAC, <10mA, 1 minute

Insulation Resistance

Primary to Secondary: 500VDC, >5M ohm, 1 minute

FEATURES:

Input Over-Current Protection

The input power line will be fused with a 1W/100ohm fuse resistor

Short Circuit Protection

Auto restart without damage

Output Over-Voltage Protection

Output should not exceed voltage limits, auto shut down

Input / Output Connection


Flying leads

Position	Terminal Color	Wire Gauge
Line	Black	AWG 18
Neutral	White	AWG 18
Vout+	Red	AWG 22
Vout-	Black	AWG 22

Ingression Protection

IP67; plastic housing

Dimension Diagram unit:mm

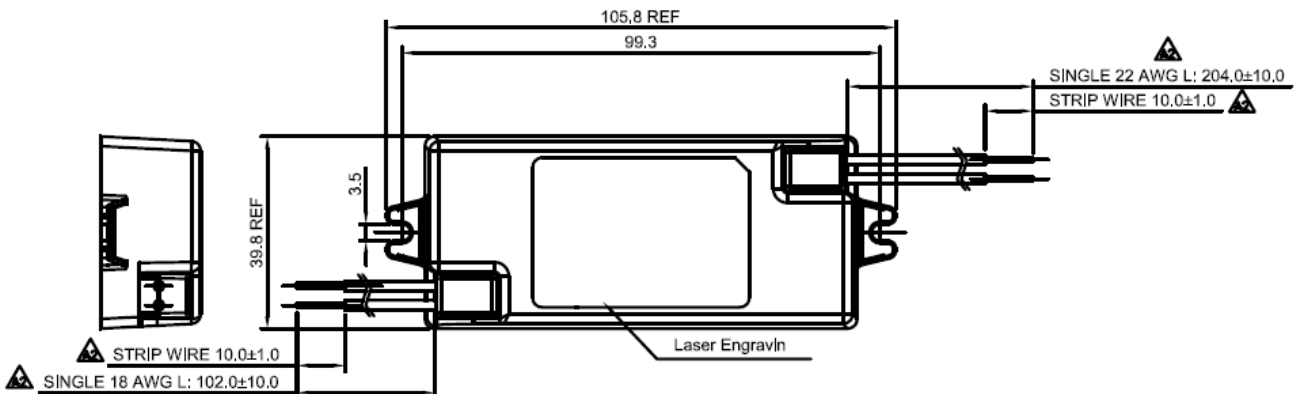

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Phihong](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [LN1224CV](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 18W 24V ONE4ALL SC PRE](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#) [LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#) [PWM-40-36](#) [PWM-60-36](#) [LUD-060S150BSF](#) [ESS010W-0750-12](#)