



**36W LED Driver with 3 Channel Constant Current Outputs
PDA038W LED Power Supply with 0-10V Dimming**



Features

- 3 Channel Output
- OVP, OTP and Short-Circuit Protection
- Brownout Protection
- Class 2 Output per UL1310
- IP65 Rated
- AC input: 108-304VAC
- ≥ 0.9 Power Factor Correction & THD <20%

Applications

- Troffers

Safety Approvals

- cUL/UL8750 / UL60950
- Class 2 Output per UL1310

Mechanical Characteristics

- Length: 242mm (9.53in)
- Width: 43.5mm (1.71in)
- Height: 30.5mm (1.2in)
- Weight: 650g

Output Specifications

Channel 1~3

Model	DC Output Voltage			Output Current	Output Power
	Min.	Typ.	Max.		
PDA038W-T350G	27V	-	36V	350mA	19W

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

INPUT:

AC Input Voltage Range
108~304VAC

AC Input Voltage Rating
120~277VAC

AC Input Frequency
47~63 Hz

Maximum Input Current
≤ 0.5A

Leakage Current
0.75mA maximum

Power Factor
≥ 0.9

THD
< 20%

OUTPUT:

Output Current Ripple
≤ 60%

Efficiency
83% at 120VAC
84% at 277VAC
Typical Efficiency: 86%

Environmental:

Temperature
Operation Tc -20 to 70°C
Non-operation -40 to +85°C
Operating Humidity 5% to 95%

EMC

FCC Part 15B, Class A

Immunity

IEC61000-4-5

Dielectric Withstand (Hi-pot) Test

Primary to secondary: 3600VAC for 3 seconds, 10mA

Insulation Resistance

Primary to secondary: >5M Ohm 500VDC, 1 Minute

Short-Circuit Protection

Latch requires power cycle to restart

Output Over-voltage Protection


Max Voltage Limit 42V

Input / Output Connections


Position	Terminal Color	Specification	Length
Input	Black	AWG18 Solid Wire	360mm
	White	AWG18 Solid Wire	360mm
	Green/Yellow	AWG18 Solid Wire	220mm
Output	Red(+)	AWG18 Solid Wire	200mm
	Blue(-)	AWG18 Solid Wire	200mm
	Blue(-)	AWG18 Solid Wire	200mm
	Blue(-)	AWG18 Solid Wire	200mm
Dim+	Violet(+)	AWG18 Solid Wire	200mm
Dim-	Grey(-)	AWG18 Solid Wire	200mm
Auxiliary	Yellow	AWG18 Solid Wire	200mm

Warranty


5 Years

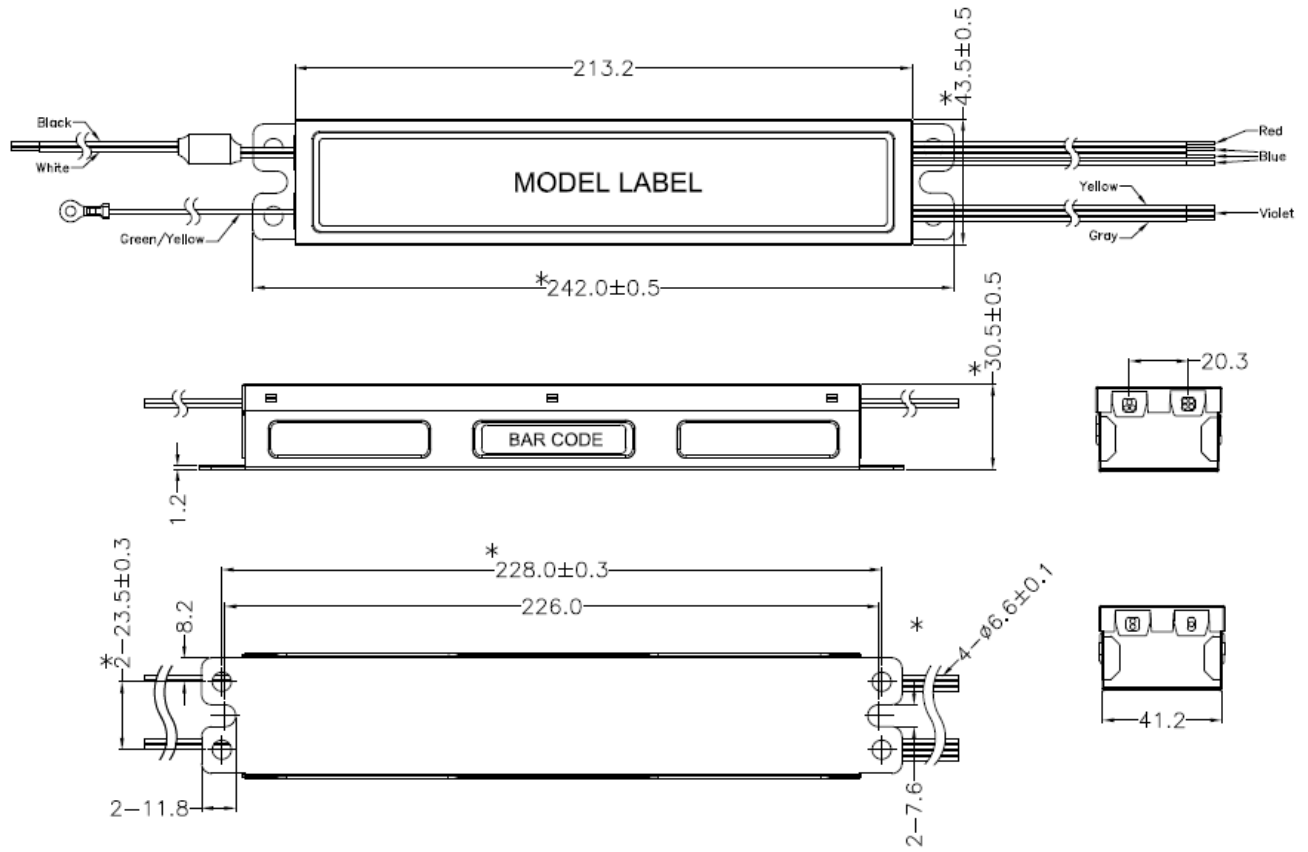


THD vs. Input voltage

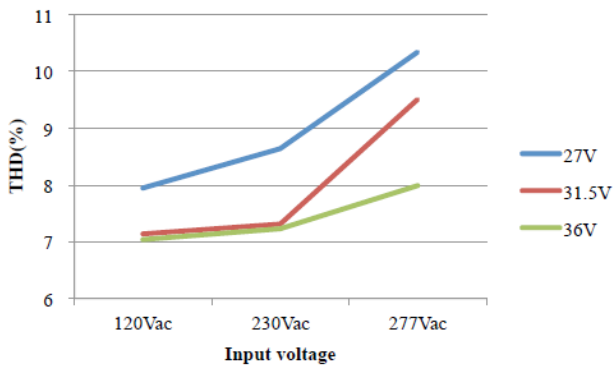


PF vs. Input voltage

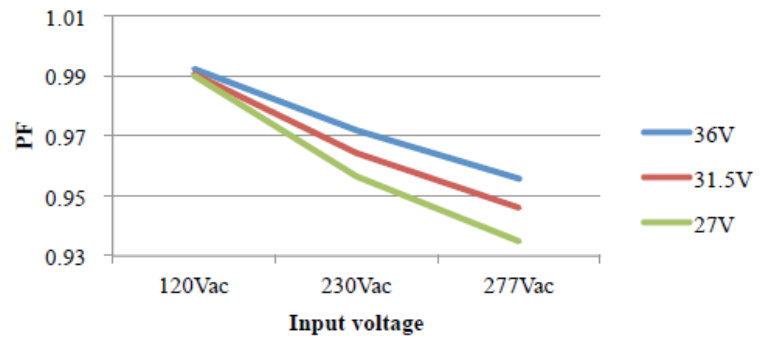

Efficiency vs. Input voltage

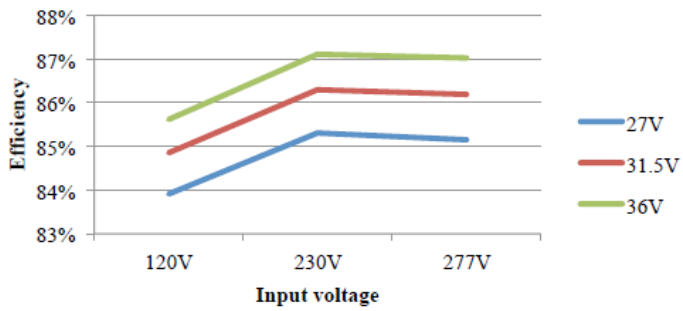

Dimming curve

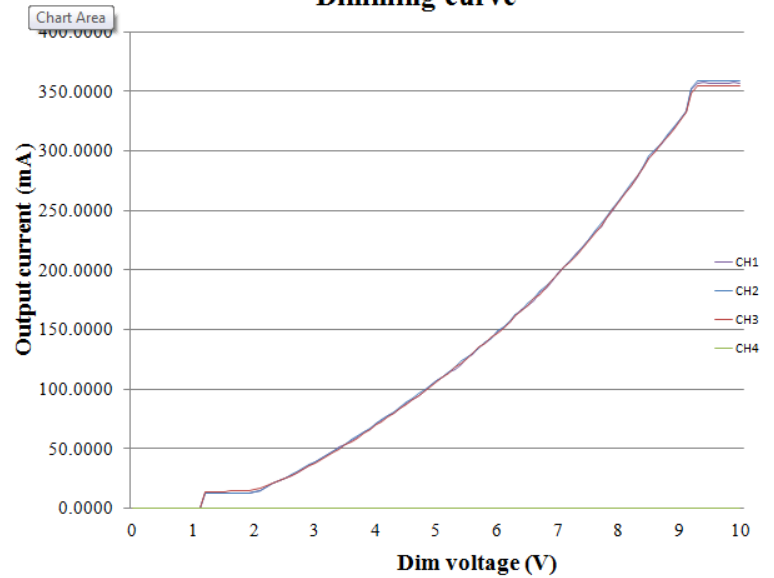

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Phihong](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#) [LN1224CV](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 18W 24V ONE4ALL SC PRE](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#) [LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#) [PWM-40-36](#)