



80W Constant Current LED Driver PDA080 Series for Outdoor Lighting



Features

- High Efficiency
- UL8750 Compliant
- 5 Year Warranty
- OVP, Short and Open Circuit Protection
- IP67 - waterproof, Potted
- Wide Operating Temperature Range
- Brownout/Brownout Recovery
- 120V-277V Rated Operation

Applications

- General Lighting
- Street Lighting
- Outdoor Lighting
- Architectural Lighting

Safety Approvals

- CE
- cUL/UL

Mechanical Characteristics

- Length: 242mm (9.5in)
- Width: 43.5mm (1.7in)
- Height: 30.5mm (1.2in)
- Weight: 750g (1.65lbs)

Output Specifications

Model ⁽¹⁾	DC Output Voltage			Output Current	Output Power ⁽²⁾
	Min.	Typ.	Max.		
PDA080X-700G	90V	-	114V	700mA	80W
PDA080X-1A0G	50V	-	76V	1000mA	80W
PDA080X-1A6G	34V	-	48V	1670mA	80W

Note (1): X is B for non-dimming or W for 0-10V Dimming

Note (2): Output power drops to 65W maximum when input is 90-100VAC

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

Input:**AC Input Voltage Range**

90VAC to 304VAC

AC Input Frequency

47~63Hz

Maximum Input Current $\leq 2A$ **Leakage Current**

0.5mA maximum at 230VAC Input

Inrush Current $\leq 20A$ **OUTPUT:****Power Factor** ≥ 0.9 at nominal**Ripple and Noise** $<7\%$ (p-p)**Efficiency (Target)**

85% at 277VAC

84% at 120VAC

Turn-on Delay Time

0.5s maximum at nominal AC Power ON

Environmental:**Temperature**

Operation -40 to +60°C

Non-operation -40 to +85°C

Operating Humidity 10 to 95%

Case Temperature

80°C maximum

Warranty

5 Years

Dimming Function: (W Models)**Dimming Control**

0-10VDC

Dimming Output to Load

PWM at 500Hz

Dimming Grounding

Dim(-) and Vout(-) must never be connected together to ensure proper operation and isolation requirements

EMC

EN55015/CISPR 15, FCC 47 CFR Part 15/18, Class A

Immunity

IEC61000-4-2

IEC61000-4-3

IEC61000-4-4

IEC61000-4-5*

IEC61000-4-6

IEC61000-4-8

IEC61000-4-11

IEC61000-3-2 Class C

*Surge Differential mode: 2.0kV, Common mode: 4.0kV

Ring Wave Surge (ANSI C62.41.2 Cat A)

Differential mode: 4.0kV

Common mode: 6.0kV

Input Over Current Protection

The input power line will be fused with a 3.15A fuse

Short-Circuit Protection

The PSU will withstand a short circuit across the outputs without damage

Open Circuit Protection


Once the circuit is opened, the output voltage should be less than 120% at nominal AC input conditions

Dielectric Withstand (Hi-pot) Test

Primary to secondary: 4242VDC for 1 minute, 5mA

Insulation ResistancePrimary to secondary: $>5M$ Ohm 500VDC, 1 Minute**Design Life**50K hours at full power, ambient 50°C and $T_{case} < \text{rating}$ **Wire Connections**

Position	Terminal Color	Specification
Line	Black	AWG18 solid wire
Neutral	White	AWG18 solid wire
Ground	Green/Yellow	AWG18 solid wire
Vout+	Red	AWG18 solid wire
Vout-	Blue	AWG18 solid wire
Dim+	Violet	AWG18 Solid wire
Dim-	Grey	AWG18 Solid Wire

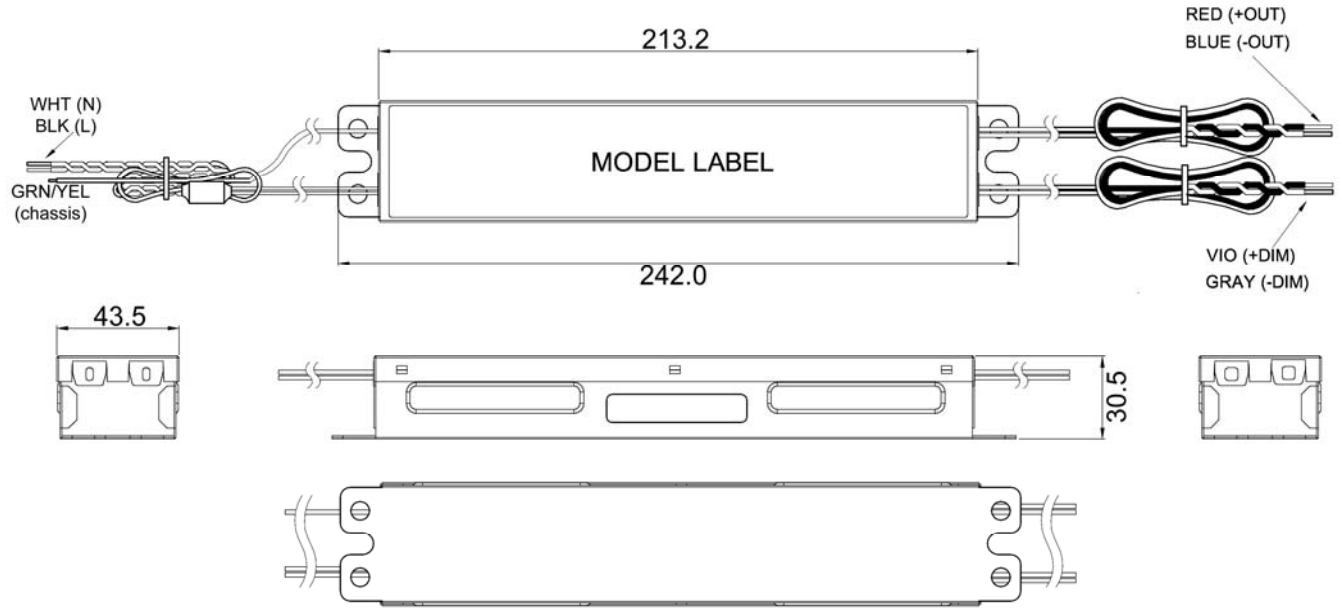

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Phihong](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#) [LN1224CV](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 18W 24V ONE4ALL SC PRE](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#) [LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#) [PWM-40-36](#)