



16 Port Gigabit Power over Ethernet Midspan POE370U for 10/100/1000 Base-T Networks



Features

- IEEE 802.3af Detection, Disconnect and Overload Protection
- NIC Interface (Optional)
- 10/100/1000 base T Compatible
- Cisco Legacy Detection
- 1-year warranty¹
- Full Power of 370W--15.4W per Port No Power Management required
- Full Protection OTP, OCP, OVP
- 48V RPS Input (Optional)
- 1U Rack Mounting Kit Ships with Unit

Applications

- VoIP Phones
- Access Point
- Security Systems
- Lighting Systems with Single UPS

Safety Approvals

- cUL/UL
- CE
- SAA
- C-Tick

Mechanical Characteristics

- Length: 438mm (17.25in)
- Width: 228mm (8.98in)
- Height: 44.5 mm (1.75in)
- Weight: 3.8Kg (8.5lbs)

Output Specifications

Model	Number of Ports	Maximum Output Power
POE370U-480-16	16	250W

Notes:

1. Effective January 1, 2019, warranty is valid for one year from purchase date. Optional extended warranties available-please consult factory for more information.

Reference Files:

1. [Multiport Midspan Installation Manual.pdf](#)
2. [19in Rack Mounting Kit Datasheet.pdf](#)
3. [SNMPv2c User Manual-Rev1.7.pdf](#)
4. [SNMPv2c Firmware-Rev1.7.zip](#)
5. [SNMPv2c MIB_10_30_2009.zip](#)

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

INPUT:**AC Input Voltage Range**

90 to 264VAC

AC Input Voltage Rating

100 to 240VAC

AC Input Current

5.5A (RMS) maximum for 90VAC

2.75A (RMS) maximum for 240VAC

Leakage Current

3.5mA maximum @ 254VAC 60Hz

AC Input Frequency

47-63Hz

AC Inrush Current

30A (RMS) maximum for 115VAC

60A (RMS) maximum for 230VAC

OUTPUT:**Total Output Power**

15.4W per port

Ripple and Regulation

100mV maximum

Efficiency75% (typical) at maximum load, and
120VAC 60Hz**Hold-up Time**

16mS min. 120VAC at maximum load

Transient O/P Voltage Protection60V maximum at switch on and off at any
AC line Phase**Turn-On Delay Time**3 sec maximum at maximum load, and
120VAC 60Hz, 25Hz**ENVIRONMENTAL:****Temperature**

Operation 0 to +40°C

Non-operation -25 to +65°C

Humidity 5 to 90%

EMCEn55022 Class B, FCC Class B with FTP
cablingEN55022 Class A, FCC Class A with UTP
cabling**Isolation Test**Primary to Secondary: 4242VDC for 1
minute

Primary to Ground: 2121VDC for 1 minute

Secondary to Ground: 2121VDC for 1
minute**Immunity EN50082-1**

ESD: EN61000-4-2. Level 3

RS: EN61000-4-3. Level 2

EFT: EN61000-4-4. Level 2

Surge: EN61000-4-5. Level 3

CS: EN61000-4-6. Level 2

Voltage Dips EN61000-4-11

Harmonic: EN61000-3-2 Class A

IEEE 802.3af InteroperabilityUNH Interoperability report available on
request**FEATURES:****Cisco Legacy detection**

No extern parts required for Legacy devices:

VoIP Phones:

7910, 7912, 7940, 7960

Access Points:

350, 1100, 1200

**Over Voltage/Current, Short Circuit
Protection**The output can be shorted permanently
without damage

Over Temperature Protection

Automatic shutdown without damage

Indicators

Green LED: Power detected “ON”

Yellow LED: Fault detected

USB Diagnostics Port

USB “B” port for diagnostics and manual port control

Windows GUI

Input Connector

AC

IEC320 inlet 3 pin


DC for RPS option

Molex Minifit

Shell 39-01-20-65

Pins 39-00-0077

POE370U-480-16 Dimension Diagram Unit: mm

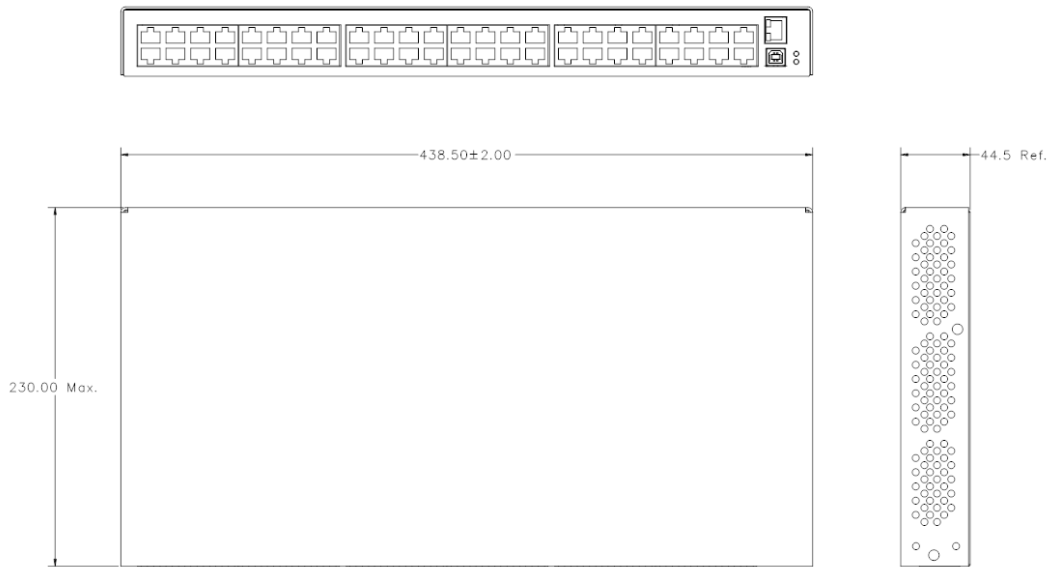

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power over Ethernet - PoE category](#):

Click to view products by [Phihong manufacturer](#):

Other Similar products are found below :

[PD-3504G/AC](#) [PD-9601G/AC](#) [PD-3504G/AC-EU](#) [180993-3001](#) [GHOSTBRIDGE-POE](#) [EKI-2701HPI-AE](#) [EKI-2701MPI-AE](#) [EKI-2701MPI-R-AE](#) [EKI-2701PSI-AE](#) [EKI-2741FHPI-AE](#) [PALS400-2482G](#) [PALS600-2482G](#) [AWPOE](#) [PD-9001GC/AC](#) [PD-9001GI/DC](#) [PD-9001GO-ET/AC](#) [PD-9001GR/AT/AC-EU](#) [PD-9601GC/AC-EU](#) [PD-9601GC/AC](#) [PD-9606GC/AC-EU](#) [PD-9612GC/AC-EU](#) [PD-9624GC/AC-EU](#) [PD-9624GC/AC-US](#) [PD-9624GC/AC](#) [PD-9001GR/AT/AC-JP](#) [PD-9501GC/AC-EU](#) [PD-6506G/AC/M](#) [PD-9001GRAC](#) [PD-OUT/MBK/G](#) [NPS-30W-B](#) [NPS-30W-WOC](#) [PD-9501GO-ET/AC](#) [PD-9601G/AC-EU](#) [PD-OUT/MBK/ET](#) [PD-OUT/MBK/S](#) [POE14-137-R](#) [POE15M-560E-R](#) [POE16R-560L6](#) [POE16S-1AFG-R](#) [POE30S-1ATG-R](#) [POE370U-480-16N-R](#) [POE370U-480-16-R](#) [POE370U-480-8N-R](#) [POE370U-480-8-R](#) [POE45-120-R](#) [POE576U-16ATN-R](#) [POE60D-560G-R](#) [POE60S-1BT-R](#) [POE60S-4AF-R](#) [POE60U-1BT-5](#)