### WWW.PHIHONG.COM



## **18 Watt Fixed Wall Plug Series**



•

•

٠

•

•



Class II Double Insulated

**High Efficiency** 

Portable Equipment

Height: 53.5mm (2.11in)

Low Cost

PDA

#### Features

- Limited Power Source (LPS)
- Class B EMI
- Level VI Compliant

### Applications

- Wireless Communications
- Peripherals
- Parinharals
- Safety Approvals
  - cUL/UL 60950-1

**Mechanical Characteristics** 

- Length: 83.5mm (3.29in)
- Width: 35mm (1.38in)

**Output Specifications** 

	Model	DC Output	Load		Ripple <sup>(1)</sup>	Regulation
widdei		Voltage	Min.	Max.	P-P (max.)	Line & Load
PS	AC18A-120L6-R	12V	0A	1.5A	240mV	±5%

Notes: (1)Measured after 30 minutes with by-pass capacitors o.1uF/10uF at output connector terminal and oscilloscope set at 20Mhz.

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

### **PSAC18A Characteristics**

Input: AC Input Voltage Rating 100 to 240V AC

**AC Input Voltage Range** 90 to 264V AC

**AC Input Frequency** 47 to 63Hz

**Input Current** 0.5A (RMS) max at 100V AC/60Hz

**Leakage Current** 0.25mA maximum at 240Vac/50Hz

### Inrush Current <40A for 115V AC at max load

<60A for 230V AC at max load (Cold start at ambient 25°C)

Output: Efficiency US DOE Level VI

# **Environmental:**

**Temperature** Operation Non-operation Humidity

0 to +40°C -20 to +70°C 90% RH max

### WWW.PHIHONG.COM

**Emissions** Complies with FCC Class B Complies with EN55032 Class B

Immunity EN61000-4-2, Level 4, contact 8kv, Air 15kV, Criteria B EN61000-4-3, Criteria A EN61000-4-4, Criteria B EN61000-4-5, Level 3, line to neutral  $\pm 1$ kV; line/neutral to FG, Criteria B EN61000-4-6, Criteria A EN61000-4-8, Criteria A EN61000-4-11, Criteria B

Hold-up Time 10mS min at 115Vac/60Hz, max load


**Over-Voltage Protection** 20.4V max at 80Vac~264Vac/50Hz, max load

**Over-Current Protection** 3A max

**Dielectric Withstand (Hi-pot) Test** Primary to Secondary: 3000V AC for 1 min., 10mA

### DC Output Connector

Barrel plug 5mm x 2.1mm x 10mm

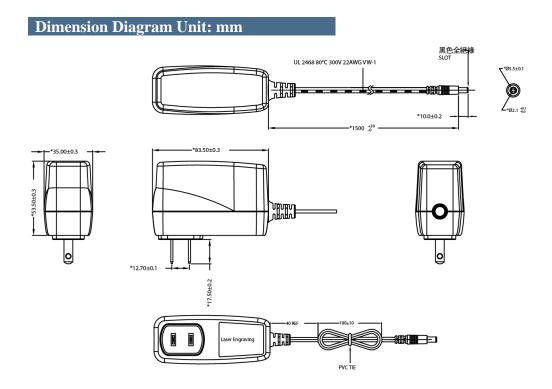

### Supplier's Declaration of Conformity 47 CFR § 2.1077 Compliance Information

Phihong USA Corporation 47800 Fremont Boulevard Fremont, CA 94538 Telephone: (510) 445-0100 www.phihong.com

NOTE: This model has/The models in this product series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- -Increase the separation between the equipment and receiver.
- -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Wall Mount AC Adapters category:

Click to view products by Phihong manufacturer:

Other Similar products are found below :

ADP-163 E ADP-167 J ADP-168 K ADP-159 A ADP-165 G PSAC05A-050L6 RLMDT361800 P25A14E-R1C DA10-050CH DA5-050US-B DA10-050UK RLMDT701800 WSU120-2000-R13 WSU180-1330-13 AC-DC ADAPTER 160W WSU120-2000-13 WSU150-0800-13 WSU075-3200-13 WSU060-2000-R13 WSU090-2500-13 WSU050-2000-R13 WSU240-1000-13 WSU240-0500-R13 WSU075-1500-13 WSU050-3000-13 WSU120-1500-13 WSU120-1500-R13 WSU045-1500-13 WSU240-0750-13 WSU090-2500-R13 WSU240-1500-13 WSU180-0660-13 WSU075-1500-R13 WSU090-1300-13 WSU180-1330-R13 BB-SMI1812VP230C1 WSU050-1500-13 WSU090-0800-13 WSU120-0700-13 WSU045-3000-13 WSU180-0450-13 WSU150-0560-R13 WSU135-0880-13 WSU120-3000-13 WSU120-1000-R13 WSU090-1300-R13 WSU060-4000-13 WSU060-1250-R13 WSU060-1250-R13 WSU045-2000-R13