




20-30W Desktop C14 Adapter Series

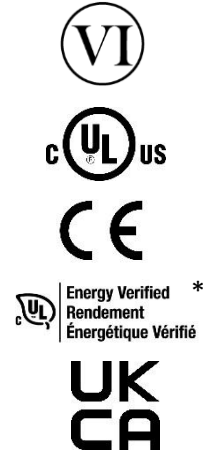

Features

- Non-Vented Case
- US DoE Level VI Efficiency Compliance
- Ecodesign/ErP Lot 7 (EU) 2019/1782 Compliance
- Class B EMI

Applications

- Portable Equipment
- Gaming Machines
- Peripherals
- Networking

*NRCan approval for PSAC30U-120L6-R, PSAC30U-240L6-R models only

Phihong Taiwan - No.568, Fuxing 3rd Rd., Guishan Dist., Taoyuan City (33383), Taiwan, ROC

Phihong USA - 47800 Fremont Blvd. Fremont, CA 94538, USA

Phihong Europe - Wattstraat 50, 2171 TR Sassenheim, The Netherlands



PSAC30U Series Specifications¹

Model		PSAC30U-050L6-R ²	PSAC30U-090L6-R ²	PSAC30U-120L6-R ²
Output	DC Output Voltage	5.0V	9.0V	12.0V
	Max Current	4.0A	3.0A	2.5A
	Output Power	20.0W	27.0W	30.0W
	Regulation	± 5%	± 5%	± 5%
	Ripple & Noise P-P(max) ³	70mV	90mV	120mV
Input	AC Input Voltage Range	90 to 264VAC		
	AC Input Frequency	47 to 63Hz		
	Input Current	0.8A (RMS) max @120VAC, 0.5A (RMS) max @240VAC		
	Inrush Current	60A max @100VAC, 100A max @240VAC		
	No Load Power Consumption at 115VAC Input	0.026W	0.030W	0.0264W
	No Load Power Consumption at 230VAC Input	0.069W	0.060W	0.054W
	115VAC Average Efficiency ⁴	84.21%	87.98%	88.88%
	230VAC Average Efficiency ⁴	83.73%	87.63%	88.83%
	230VAC 10% Load Efficiency ³	76.13%	82.30%	83.98%
Leakage Current	3.5mA max @254VAC, 50Hz			
Protection	Over-Voltage	10V max, Auto-restart	15V max, Auto-restart	20V max, Auto-restart
	Short Circuit	Output can be shorted permanently without damage		
	Over-Current	Auto restart		
Environmental	Operating Temperature	0°C to +40°C		
	Non-Operating Temperature	-20° to +75°C		
	Operating Humidity	20 to +90%		
Safety Approvals and EMC	Dielectric Withstand (HI-POT)	Primary to Secondary: 3000VAC for 1min, 10mA		
	Insulation Resistance	Primary to Secondary: >7M ohm for 500VDC		
	Standards	cULus 60950-1, cULus 62368-1 IEC 60950-1, IEC 62368-1		
	EMI Emissions	FCC Part 15 Class B, CAN ICES-003(B)/NMB-003(B), EN 55032/CISPR 32 Class B Conducted and Radiated		
	Harmonic Current Emissions	IEC 61000-3-2		
	Voltage Fluctuations & Flicker	IEC 61000-3-3		
	Immunity	EN 55024/CISPR 24: IEC 61000-4-2 (+/- 8kV air, +/- 4kV contact), IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5 (+/- 2kV), IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11		
Mechanical	Dimensions (L x W x H)	103.4mm (4.07in) x 42mm (1.65in) x 28.7mm (1.13in)		
	Weight	175g		
	Cable Length	1000mm	1000mm	1500mm
	DC Output Connector	2.1mm x 5.5mm x 10.0mm		
	DC Plug Pin Assignment	Inner (V+) / Outer GND (V-)		
	Cable Wire Type	16 AWG	16 AWG	18 AWG
	Input Connector	IEC 60320 C14		


Model		PSAC30U-240L6-R ²	PSAC30U-480L6-R ²	PSAC30U-560L6-R ²
Output	DC Output Voltage	24.0V	48.0V	56.0V
	Max Current	1.25A	0.625A	0.536A
	Output Power	30.0W	30.0W	30.016W
	Regulation	± 5%	± 5%	± 5%
	Ripple & Noise P-P(max) ³	240mV	480mV	560mV
Input	AC Input Voltage Range	90 to 264VAC		
	AC Input Frequency	47 to 63Hz		
	Input Current	0.8A (RMS) max @120VAC, 0.5A (RMS) max @240VAC		
	Inrush Current	60A max @100VAC, 100A max @240VAC		
	No Load Power Consumption at 115VAC Input	0.042W	0.050W	0.050W
	No Load Power Consumption at 230VAC Input	0.070W	0.080W	0.090W
	115VAC Average Efficiency ⁴	89.22%	89.83%	90.27%
	230VAC Average Efficiency ⁴	89.19%	89.10%	89.18%
	230VAC 10% Load Efficiency ⁴	83.33%	78.57%	79.88%
Leakage Current	3.5mA max @254VAC, 50Hz			
Protection	Over-Voltage	33V max, Auto-restart	65V max, Auto-restart	66V max, Auto-restart
	Short Circuit	Output can be shorted permanently without damage		
	Over-Current	Auto restart		
Environmental	Operating Temperature	0°C to +40°C		
	Non-Operating Temperature	-20° to +75°C		
	Operating Humidity	20 to +90%		
Safety Approvals and EMC	Dielectric Withstand (HI-POT)	Primary to Secondary: 3000VAC for 1min, 10mA		
	Insulation Resistance	Primary to Secondary: >7M ohm for 500VDC		
	Standards	cULus 60950-1, cULus 62368-1 IEC 60950-1, IEC 62368-1		
	EMI Emissions	FCC Part 15 Class B, CAN ICES-003(B)/NMB-003(B), EN 55032/CISPR 32 Class B Conducted and Radiated		
	Harmonic Current Emissions	IEC 61000-3-2		
	Voltage Fluctuations & Flicker	IEC 61000-3-3		
Mechanical	Immunity	EN 55024/CISPR 24: IEC 61000-4-2 (+/- 8kV air, +/- 4kV contact), IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5 (+/- 2kV), IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11		
	Dimensions (L x W x H)	103.4mm (4.07in) x 42mm (1.65in) x 28.7mm (1.13in)		
	Weight	140g		
	Cable Length	1500mm		
	DC Output Connector	2.1mm x 5.5mm x 10.0mm		
	DC Plug Pin Assignment	Inner (V+) / Outer GND (V-)		
	Cable Wire Type	24 AWG		
Input Connector	IEC 60320 C14			
Notes	<ol style="list-style-type: none"> The specifications defined are at ambient temperature of 25°C, unless otherwise specified. Special order MOQ 20MHz bandwidth frequency oscilloscope, add a 0.1µF multilayer Cap. and Low ESR Electrolytic Cap. (10µF) at output connector terminals (nominal line voltage, full load). Efficiency is measured after 30 minutes burn-in. 			

*NRCan approval for PSAC30U-120L6-R, PSAC30U-240L6-R models only



Outline Drawing


PSAC30U-050L6-R, PSAC30U-090L6-R

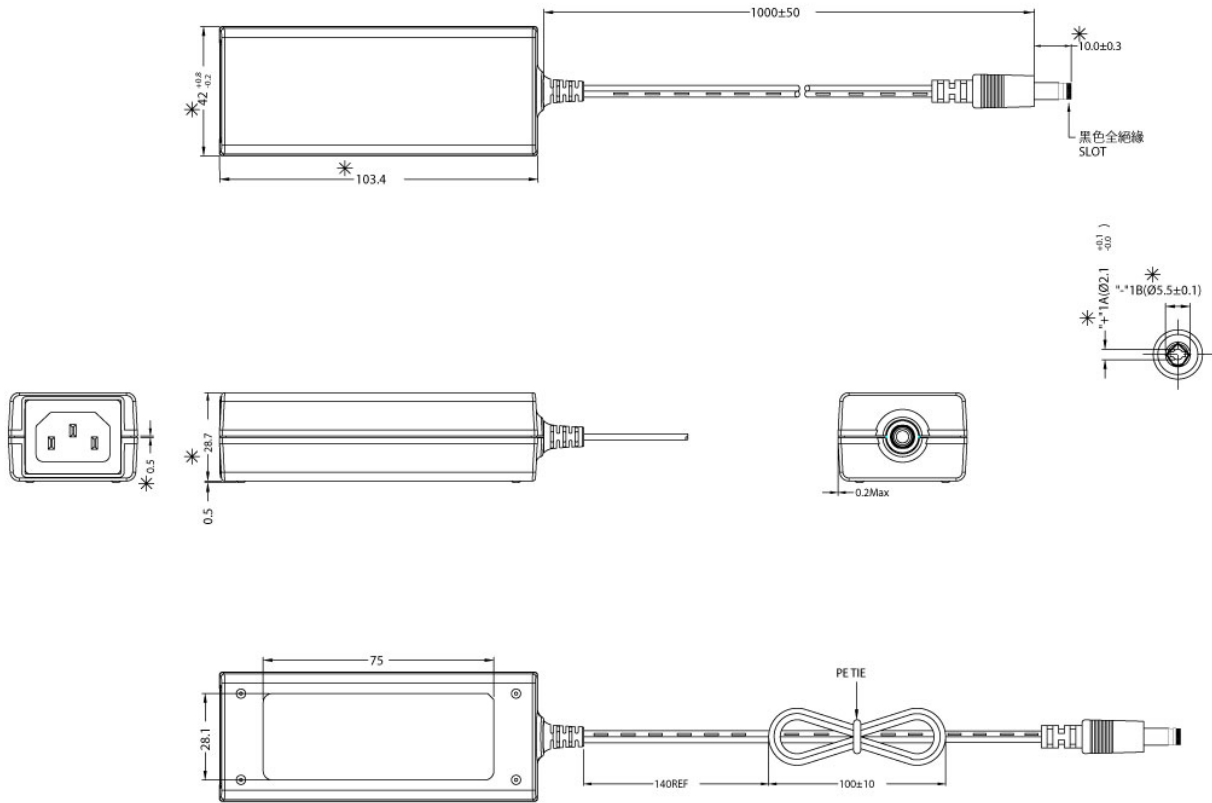



Outline Drawing

PSAC30U-120L6-R, PSAC30U-240L6-R,
PSAC30U-480L6-R, PSAC30U-560L6-R

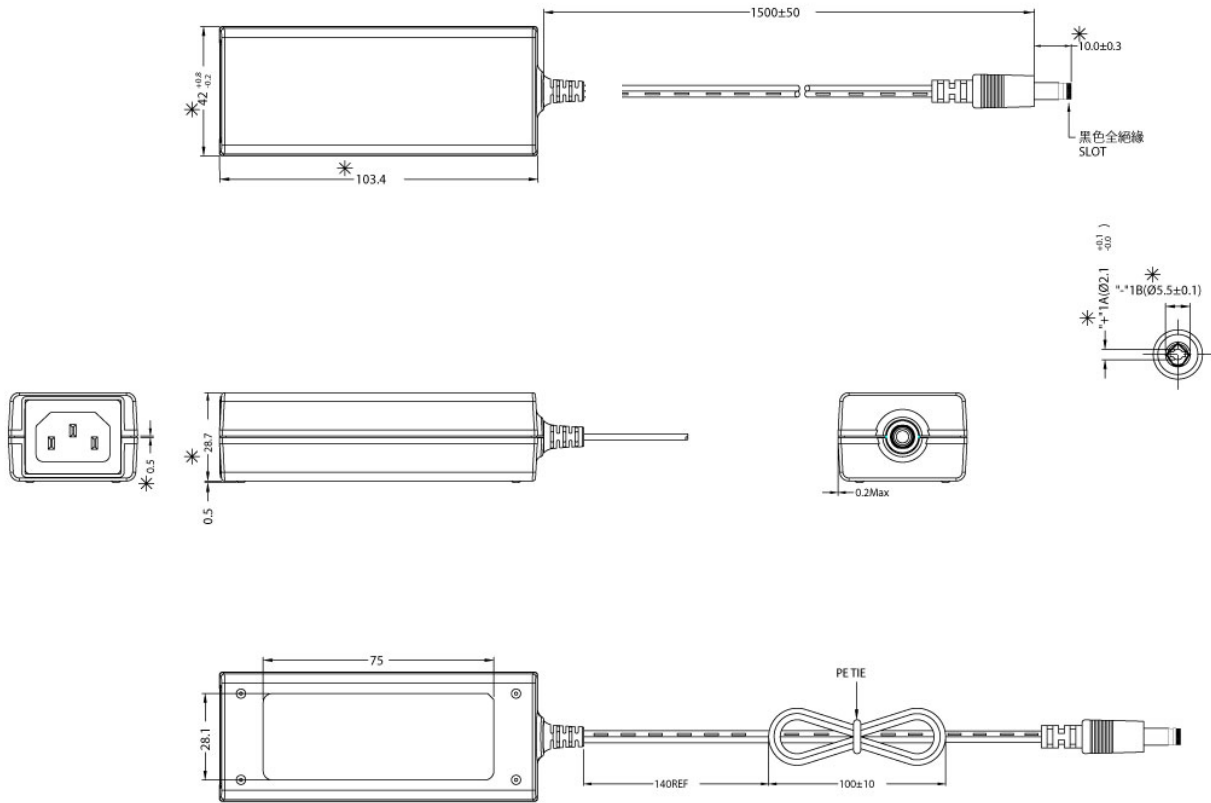






**Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information**

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

This device complies with/The devices in this product series comply with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.




Line Cords - Sold Separately

Model		AC30UNA-R	AC30UEU-R	AC30UUK-R
Specifications	Plug Type	North America NEMA 5-15P	Continental Europe CEE 7VIII	United Kingdom BS 1363
	Connector	IEC320 C13	IEC320 C13	IEC320 C13
	Wire Size	18 AWG	0.75mm	1.0mm
	Temperature	60°C	70°C	70 °C
	Amperage Rating	10A	6A	10A
	Voltage Rating	125V	250V	250V
	Cable Length	1830mm	1830mm	2500mm
Safety Approvals		CSA; UL	CEBEC; DEMKO; DVE; FIMKO; GOST; IMQ; KEMA; NEMKO; NF; OVE; SEMKO	BSI; Safety Mark
Photos				




Line Cords - Outline Drawings


AC30UNA-R

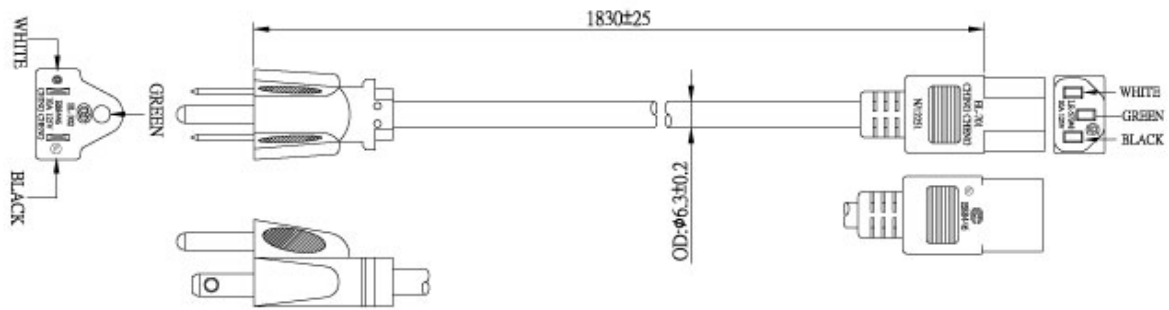

AC30UEU-R

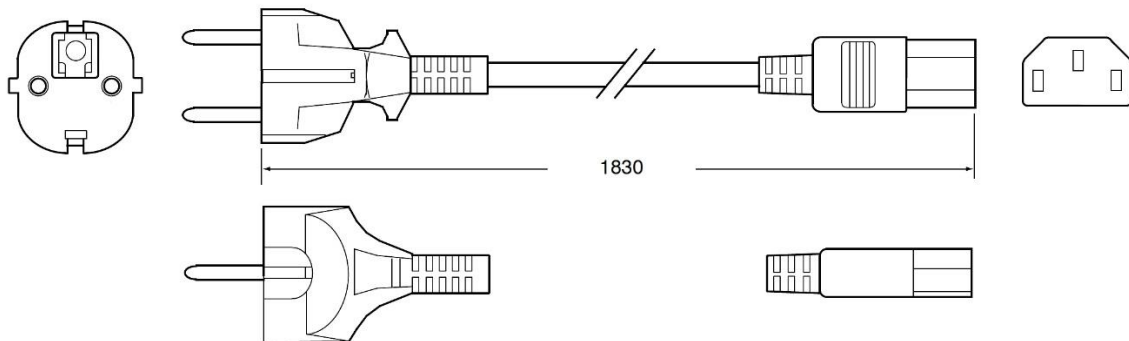

AC30UUK-R

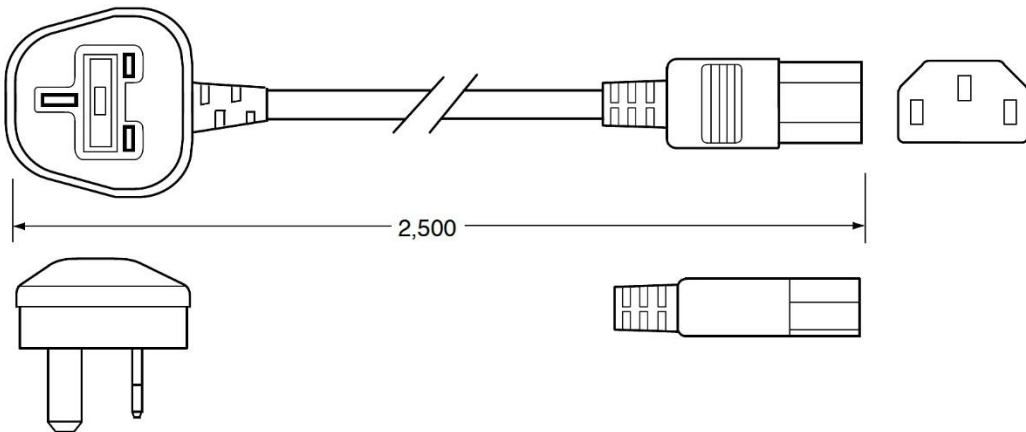

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Desktop AC Adapters](#) category:

Click to view products by [Phihong](#) manufacturer:

Other Similar products are found below :

[212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [KR8-PS01](#) [1894875](#) [FWE050024B-10A](#) [820A4080G](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#) [TRH21A120-49E03-Level-VI](#) [FWC100024A-11A](#) [FWE050012B-10A](#) [AC-DC ADAPTER 90W w/ Cable](#) [FWA065024A-11A](#) [PSA120U-560L6](#) [96PSA-A63W18V1-M](#) [1895235](#) [PW-C0725-W2-B](#) [57-U1](#) [57-U2](#) [SED80N2-16.0](#) [SED80N3-16.0](#) [RFQ43442-01](#) [YS50-1903150](#) [50966124050E](#) [MEA-045AA2C K-A](#) [PCM50UT04](#) [PCM50UT05](#) [CPSUNOTAKY-07056](#) [CPSUNOTAKY-07168](#) [CPSUNOTAKY-07169](#) [CPSUNOTAKY-07234](#) [CPSUNOTAKY-07236](#) [CPSUNOTAKY-07288](#) [CPSUNOTAKY-07312](#) [CPSUNOTAKY-07342](#) [CPSUNOTAKY-07388](#) [TE30A0503F01](#) [TE30A4803F01](#) [TE40A2403F01](#) [TE40A2403N01](#) [ME30A1803N01](#) [ME30A4803F01](#) [ME40A1203N01](#) [ME40A2403N01](#) [MENT1150A2451F01](#) [125530040F](#)