



**PSM1000 1100W 1U RPS and Bulk n+1 Power Supply with active PFC**



**Features**

- SELV Output with 1500VAC Isolation
- 1100W x 3 in 1U 19” Rack
- Hot Plug N+1
- Diagnostic LEDs
- Full Protection OTP, OCP, OVP

**Applications**

- Power over Ethernet
- Telecommunications
- Network Redundant Power Source
- Servers

**Safety Approvals**

- cUL/UL
- CE

**Mechanical Characteristics**

- Length: 300mm (11.81in)
- Width: 107mm (4.21in)
- Height: 41mm (1.61in)
- Weight: 2Kg (4lb)

**Output Specifications**

Model	DC Output Voltage	Min. Load	Max. Load		Max Power
			≤100VAC IN	≥115VAC IN	
PSM1000-216	56V (Main)	0A	17.8A	19.65A	1100W*
	12V (Stand-by)	0A	0.5A		

\*Please refer to second page for more specific output power information

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at [www.phihong.com](http://www.phihong.com) for the most up-to-date specifications and contact information.

**Input:**

**AC Input Voltage Range**  
90 to 264V AC

**AC Input Frequency**  
47 to 63Hz

**Input Current**  
15A (RMS) max low line  
7.5A (RMS) max high line

**AC Input Line Fuse**  
20A/250V

**Leakage Current**  
3.5mA maximum at 264V AC, 50Hz


**Inrush Current**  
35A maximum at 115VAC  
70A maximum at 230VAC

**Hold-up Time**  
10mS minimum at max load with output dropping to 50V

**Output:**

**Output Power**  
1100W for AC Input 115VAC to 264VAC  
1000W for AC Input 100VAC or less

**Efficiency**  
≥85% (typical) at 115VAC or greater

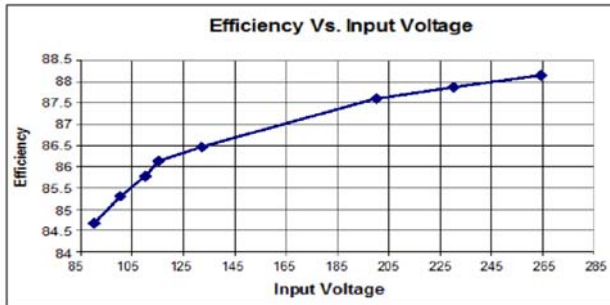

**Output Ripple and Noise**  
56V=1% pk-pk at ambient 25°C  
12V=2% pk-pk at ambient 25°C

**Over-Voltage Protection**  
Latching, OV set at 60V±5%

**Thermal Shutdown**  
Non latching

**Over-Current/Short-Circuit Protection**

Latching with timer; the 56V output can operate in current mode till short circuit. Output latches within 2-4 seconds if overload or short circuit. The condition will not be removed.

**56V Enable/Disable**

Non-latching –remote on/off pin, short to output return to enable

**Fan Fail**

Latching

**Environmental:**

**Temperature**

Operation (Standalone) 0 to 50°C  
Operation (In Rack) 0 to 40°C  
Non-operation -30 to +70°C

**Emissions**

FCC Class A  
EN55022 Class A

**Immunity**

ESD: EN61000-4-2 Level 4  
RS: EN61000-4-3 Level 3  
EFT: EN61000-4-4 Level 3  
Surge: EN61000-4-5 Level 4  
CS: EN61000-4-6 Level 3  
Voltage Dips: EN61000-4-11  
Harmonic: EN61000-3-2

**Insulation Resistance**

Input to Output: 7M ohm 500VDC

**Dielectric Withstand (Hi-pot) Test**

Primary to Secondary: 4242VDC for 1 minute  
Primary to Chassis: 2121VDC for 1 minute  
Secondary to Chassis: 2121VDC for 1 minute

**Indicators (Front Panel)**


DC Good LED – Green  
Fault LED – Red (Fan Fail, Thermal Shutdown, Over Load, Short Circuit)

**AC Input Connector**

IEC320 3-Pin located on the front of the module

**DC Output Connector**

FCI p/n 51761-10001604AA or Equivalent  
Mate FCI p/n 51731-29 or Equivalent  
Pin Out +56V main +P1, P2; -56V main = P3, P4;  
Enable – A4; CS\_BUS = D4; +12Vsb =C1, D1; -12Vsb +A1, B1

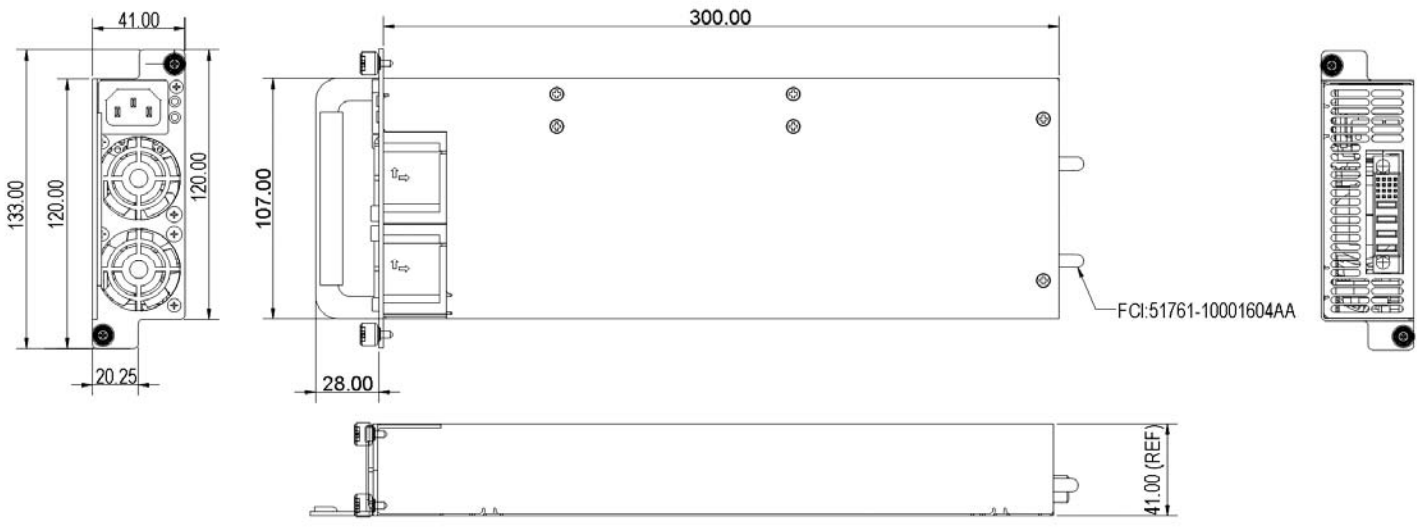

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rack Mount Power Supplies](#) category:*

*Click to view products by [Phihong](#) manufacturer:*

Other Similar products are found below :

[HFE2500BP](#) [PET1300-12-054NAE](#) [HFE1600BP](#) [73-311-0001](#) [73-317-0148](#) [73-495-0233](#) [750-1016](#) [SFP450-S101G](#) [FUP550SNRPS](#)  
[VRA.00335.0](#) [VRA.00334.0](#) [VRA.00333.0](#) [HFE1600-KIT](#) [CP841A\\_3C3R\\_S](#) [CC109146503](#) [RKP-1UI](#) [LCM600Q-T-A](#) [PFE1100-12-054ND](#)  
[FND300-1012G](#) [73-951-0001T](#) [73-954-0001C](#) [DS550DC-3](#) [RCP-2000-24](#) [TSR10](#) [TET2000-12-086NA](#) [PET2000-12-074RA](#) [RCP-MU](#)  
[RCP-3K1UI-12](#) [605-10144-2AC](#) [6609006-5](#) [D1U54P-W-1200-12-HC4PC](#) [DS450DC-3](#) [DS650DC-3](#) [LCM300Q-T-4](#) [LCM300W-T-4](#)  
[LCM600N-T-4-A](#) [FNP600-48G](#) [FNR-3-48G](#) [FNR-5-12G](#) [SPSPFE3-05G](#) [TET3200-12-069RA](#) [IEC-A-1](#) [DHP-1UT-A](#) [DRP-3200-24](#) [RCP-](#)  
[1000-12](#) [RCP-1000-12-C](#) [RCP-1000-24](#) [RCP-1000-24-C](#) [RCP-1000-48](#) [RCP-1000-48-C](#)