

Fuse holder - TTC-6-FC-UT/50 - 1104514


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Fuse carrier for surge protective devices of the TERMITRAB complete product range with screw connection technology. Multi-level connection on TTC-6 housings possible. For conventional 5x20 mm miniature fuses.



Key Commercial Data

| | |
|------------------------|---|
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| GTIN |  4 055626 971520 |
| GTIN | 4055626971520 |

Technical data

Dimensions

| | |
|--------|----------------|
| Height | 24 mm |
| Width | 6.2 mm +0.1 mm |
| Depth | 47 mm |

Ambient conditions

| | |
|---|--|
| Ambient temperature (operation) | -40 °C ... 85 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Altitude | ≤ 4000 m (amsl (above mean sea level)) |
| Degree of protection | IP20 |

General

| | |
|--|--|
| Housing material | PBT |
| Flammability rating according to UL 94 | V-0 |
| Color | traffic grey A RAL 7042 |
| Mounting type | Snapping and screwing components onto TERMITRAB complete |

Protective circuit

| | |
|-------------------------|---------|
| Operating voltage range | 60 V DC |
|-------------------------|---------|

Fuse holder - TTC-6-FC-UT/50 - 1104514

Technical data

Protective circuit

| | |
|---------------|-------|
| Rated current | 6.3 A |
|---------------|-------|

Connection data


| | |
|----------------------------------|---|
| Connection method | Screw connection |
| Screw thread | M3 |
| Tightening torque | 0.5 Nm |
| Stripping length | 8 mm |
| Conductor cross section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section solid | 0.2 mm ² ... 4 mm ² |
| Conductor cross section AWG | 24 ... 12 |

Standards and Regulations

| | |
|--------------------------|-------------------|
| Standards/specifications | EN 60947-7-3 2009 |
|--------------------------|-------------------|

Drawings

Dimensional drawing

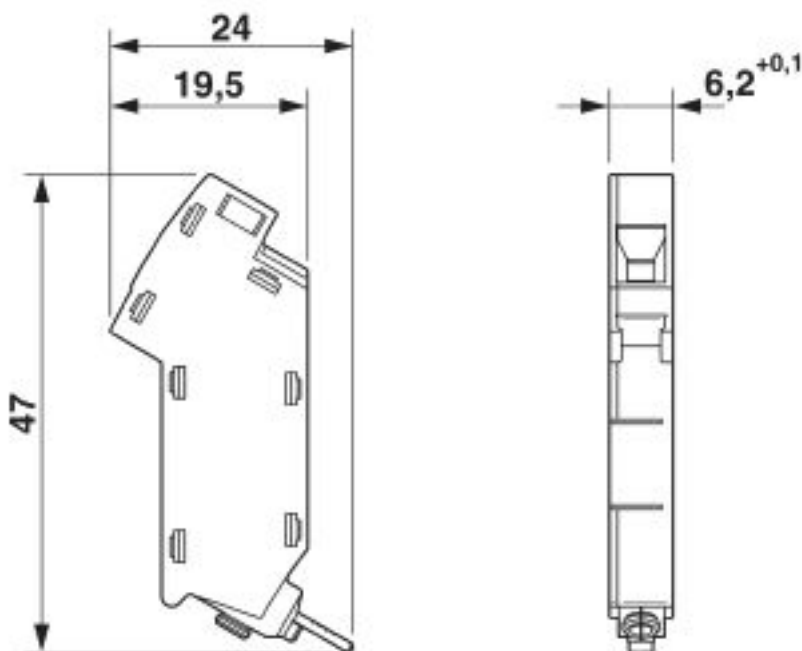

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27130890 |
| eCl@ss 8.0 | 27130890 |
| eCl@ss 9.0 | 27130890 |

Fuse holder - TTC-6-FC-UT/50 - 1104514

Classifications

ETIM

| | |
|----------|----------|
| ETIM 5.0 | EC002497 |
| ETIM 6.0 | EC002497 |
| ETIM 7.0 | EC002497 |

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [020417G](#) [020418E](#) [6R30A1B](#) [F600A3B](#) [80910030](#) [8601.2020](#) [G15A2SPQ](#) [9-3557-GP REV A](#) [HDJ-B](#)
[R6J30A3S](#) [HFH-1](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [BK/FHN19G](#) [BK/HHM](#) [BK/HKP-CCHH](#) [BK/HKP-JJ](#) [BK/HTJ-LES-FUSE](#) [HMG-](#)
[241](#) [HTJ-LES-FUSE](#) [C4044-1](#) [2086-1](#) [2193](#) [2602](#) [2650](#) [178.000100](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [HKP-CCHH](#)
[R6F30A2S](#) [341001A](#) [345621A](#) [CVRMCC](#) [4202](#) [4407](#) [4408](#) [4413](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#) [BK/HC-5](#)