

Charger - SF-ASD 16/CHARGER - 1200296

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Charger, for 100 ... 240 V mains voltage, recognition of battery and parameter check, rapid charging, short-circuit resistant, polarized, operating mode display




Your advantages

- Diagnostic and status indicators
- Easy operation
- Rapid battery charging
- reverse polarity protected
- 3.6 V
- 100 V ... 240 V
- 50 ... 60 Hz



Key Commercial Data

| | |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 1 pc |
| GTIN |  4 055626 666440 |
| GTIN | 4055626666440 |

Technical data

Dimensions

| | |
|------------|--------|
| Length (b) | 143 mm |
| Width (a) | 108 mm |
| Height (c) | 55 mm |

Ambient conditions

| | |
|---------------------------------|----------------|
| Ambient temperature (operation) | 5 °C ... 40 °C |
| Degree of protection | IP30 |

General

| | |
|-------------------|-------|
| Color | black |
| Power consumption | 15 W |

Charger - SF-ASD 16/CHARGER - 1200296


Technical data

Environmental Product Compliance

| | |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 5 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Schematic diagram

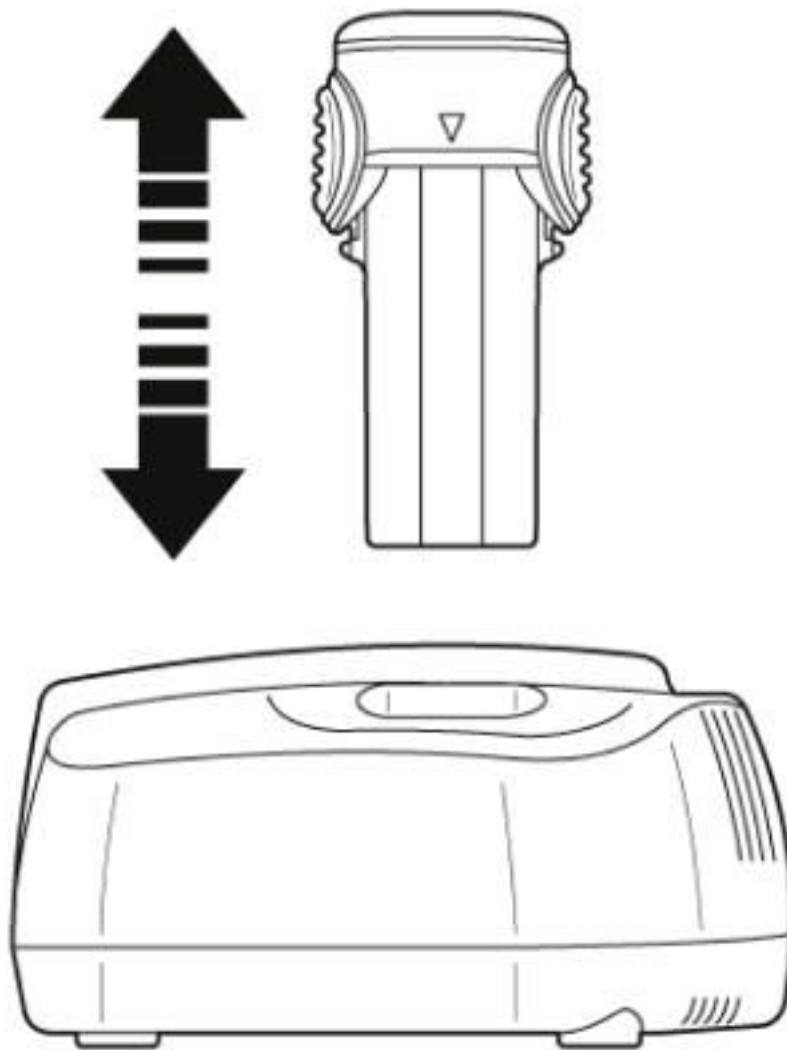

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 21059205 |
|---------------|----------|

Charger - SF-ASD 16/CHARGER - 1200296

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 7.0 | 21059205 |
| eCl@ss 9.0 | 21059205 |

ETIM

| | |
|----------|----------|
| ETIM 6.0 | EC001184 |
| ETIM 7.0 | EC001184 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

| | | |
|-----|--|--------------------------|
| EAC | | RU C- DE.AI30.B.01750 |
|-----|--|--------------------------|

Accessories

Accessories

Battery module

Battery module - SF-ASD 16/ACCU 1,5 AH - 1200297



Replacement battery, 1.5 Ah, lithium-ion, 3.6 V, for SF-ASD 16 cordless screwdriver

Torque tool

Battery-powered screwdriver set - SF-ASD 16 SET - 1200295



Cordless screwdriver in case, incl. battery, charging device 100 ... 240 V, 2 bits, two-speed gearbox, forward/reverse running and 16-stage clutch up to 450 rpm, hexagonal fast connection.

Charger - SF-ASD 16/CHARGER - 1200296

Accessories

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Battery Chargers](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[CH0011](#) [CB1210A](#) [PS-034052](#) [GP X411 AA/AAA + 4X R6 2700MAH RECYKO](#) [CB243A](#) [CB123A](#) [CB12245A](#) [DA60U-240A-R](#) [DA84U-240A-R](#) [DA200U-250A-R](#) [MC2](#) [VP4 PLUS DRAGON](#) [LCD MULTI CHARGER](#) [MINI-CHARGER](#) [5V 2.1A](#) [PB320](#) [PB50](#) [PB550 + 4XAA 2700MAH](#) [VC4](#) [POCKET-CHARGER + 4XAA 2100MAH](#) [PB-300P-12](#) [VC2](#) [MINI CHARGER + 2XAA 2100MAH](#) [CHFC3](#) [GC30U-5P1J](#) [SBP-001](#) [PB-300N-12](#) [GC30B-11P1J](#) [GC220A12-AD1](#) [DBU-3200-24](#) [RRC-SMB-MBC](#) [TSP-BCM12](#) [TSP-BCM360](#) [TSP-BCM48A](#) [H-TRONIC AL 2000PLUS](#) [ES240J](#) [ES360A](#) [LS-CR45-PQ](#) [LS-CR45-PD WHITE](#) [5V 1A](#) [MC3](#) [PB2 BLUE](#) [SC1](#) [SC2](#) [VC2S](#) [X2](#) [X4](#) [CEF14](#) [2XAA](#) [2XAAA](#) [CEF27](#) [2XAA](#) [2XAAA](#) [CL14.4VDC-0.4A](#)