

## Sensor/actuator cable - SAC-4P-M12MS/5,0-600 SH HD - 1403983

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/actuator cable, 4-position, PP-EPDM halogen-free, gray RAL 7035, shielded, Plug straight M12, coding: A, on free cable end, cable length: 5 m, Hygienic design, with high-grade steel knurl

### Your advantages

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ Easy to clean, thanks to the special hygienic design
- ✓ Corrosion protection for all exposed metal parts, thanks to the use of stainless steel type 1.4404
- ✓ Contamination can be detected quickly – thanks to the light color
- ✓ Reliable signal transmission – 360° shielding in environments with electromagnetic interference

### Key Commercial Data

|              |               |
|--------------|---------------|
| Packing unit | 1 pc          |
| GTIN         |               |
| GTIN         | 4046356677387 |

### Technical data

#### Dimensions

|                 |     |
|-----------------|-----|
| Length of cable | 5 m |
|-----------------|-----|

#### Ambient conditions

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Ambient temperature (operation) | -40 °C ... 105 °C (Plug / socket) |
| Degree of protection            | IP65                              |
|                                 | IP67                              |
|                                 | IP68                              |
|                                 | IP69K                             |

#### General

|                       |         |
|-----------------------|---------|
| Rated current at 40°C | 4 A     |
| Rated voltage         | 48 V AC |
|                       | 60 V DC |

# Sensor/actuator cable - SAC-4P-M12MS/5,0-600 SH HD - 1403983

## Technical data

### General

|                              |  |
|------------------------------|--|
| Number of positions          | 4  |
| Insulation resistance        | ≥ 100 MΩ                                 |
| Coding                       | A - standard                             |
| Standards/regulations        | M12 connector IEC 61076-2-101            |
|                              | Material conformance FDA 21 CFR 177.2600 |
| Status display               | No                                       |
| Protective circuit/component | unwired                                  |
| Overvoltage category         | II                                       |
| Degree of pollution          | 3  |
| Insertion/withdrawal cycles  | ≥ 100                                    |
| Torque                       | 0.4 Nm (M12 connector)                   |

### Material

|                          |                 |
|--------------------------|-----------------|
| Contact material         | CuSn            |
| Contact surface material | Ni/Au           |
| Contact carrier material | PP              |
| Material of grip body    | PP              |
| Material, knurls         | Stainless steel |

### Standards and Regulations

|                          |  |
|--------------------------|--|
| Standards/specifications | M12 connector IEC 61076-2-101            |
|                          | Material conformance FDA 21 CFR 177.2600 |

### Cable

|   |                                       |
|---|---------------------------------------|
| Cable abbreviation                              | Li9YV1-C-V1-9Y                        |
| Conductor cross section                         | 4x 0.34 mm <sup>2</sup> (Signal line) |
| AWG signal line                                 | 22                                    |
| Conductor structure signal line                 | 42x 0.10 mm                           |
| Core diameter including insulation              | 1.27 mm ±0.02 mm (Signal line)        |
| Thickness, insulation                           | ≥ 0.21 mm (Core insulation)           |
| Wire colors                                     | brown, white, blue, black             |
| Overall twist                                   | 4 wires, twisted                      |
| Length of twist, overall twist                  | 48 mm                                 |
| Shielding                                       | Braided copper wires                  |
| Optical shield covering                         | 85 %                                  |
| External sheath, color                          | gray RAL 7035                         |
| Outer sheath thickness                          | approx. 0.8 mm                        |
| External cable diameter D                       | 5.55 mm ±0.2 mm                       |
| Minimum bending radius, fixed installation      | 5 x D                                 |
| Minimum bending radius, flexible installation   | 10 x D                                |
| Number of bending cycles                        | 2000000                               |
| Minimum bending radius, drag chain applications | 10 x D                                |

# Sensor/actuator cable - SAC-4P-M12MS/5,0-600 SH HD - 1403983

## Technical data

### Cable


|                                 |   |
|---------------------------------|---|
| Traversing path                 | 10 m  |
| Traversing rate                 | 3 m/s   |
| Acceleration                    | 10 m/s <sup>2</sup>   |
| Cable weight                    | 40 kg/km  |
| Outer sheath, material          | PP-EPDM   |
| Material conductor insulation   | PP  |
| Conductor material              | Bare Cu litz wires  |
| Conductor resistance            | 58 Ω/km (at 20 °C)  |
| Nominal voltage, cable          | ≤ 300 V AC  |
| Test voltage, cable             | ≥ 3000 V AC (Spark test)  |
| Test voltage Core/Shield        | ≥ 2000 V AC (for 60 s)  |
| Special properties              | FDA compliant according to FDA 21 CFR 177.2600                                    |
|                                 | flexible  |
|                                 | Flexible cable conduit capable  |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815  |
| Other resistance                | Resistant to cold bending and cold impacts According to DIN EN 60811-1-4 (-40 °C) |
| Ambient temperature (operation) | -40 °C ... 105 °C (cable, fixed installation)                                     |
|                                 | -25 °C ... 105 °C (cable, flexible installation)                                  |

### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings


Dimensional drawing

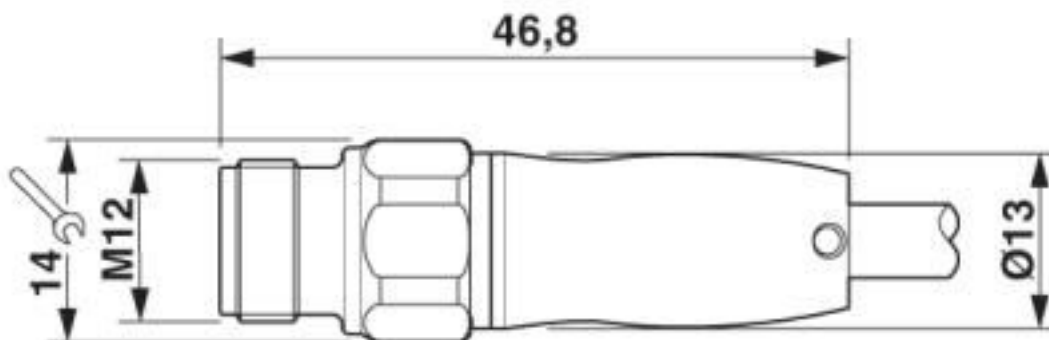

Plug, M12 x 1, straight, shielded

## Sensor/actuator cable - SAC-4P-M12MS/5,0-600 SH HD - 1403983


Circuit diagram

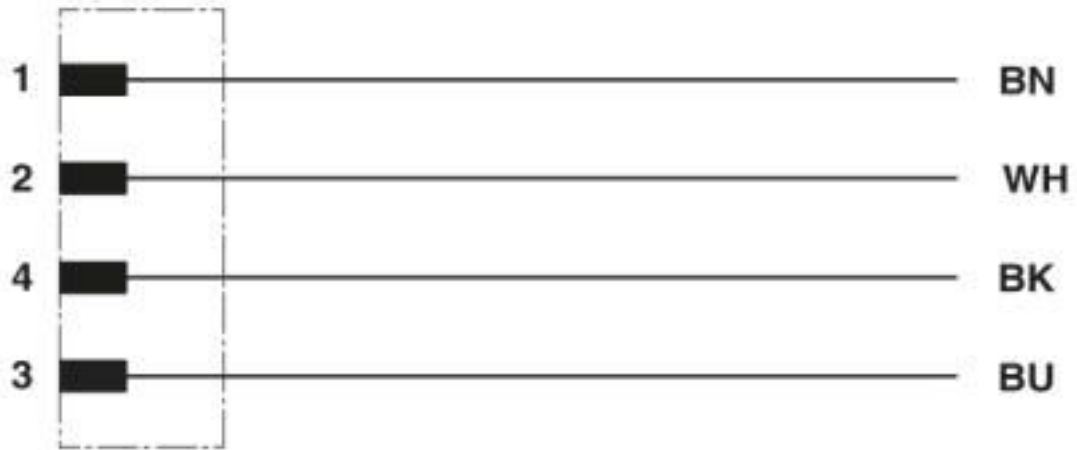

Contact assignment of the M12 plug and the M12 socket

# Sensor/actuator cable - SAC-4P-M12MS/5,0-600 SH HD - 1403983


Schematic diagram

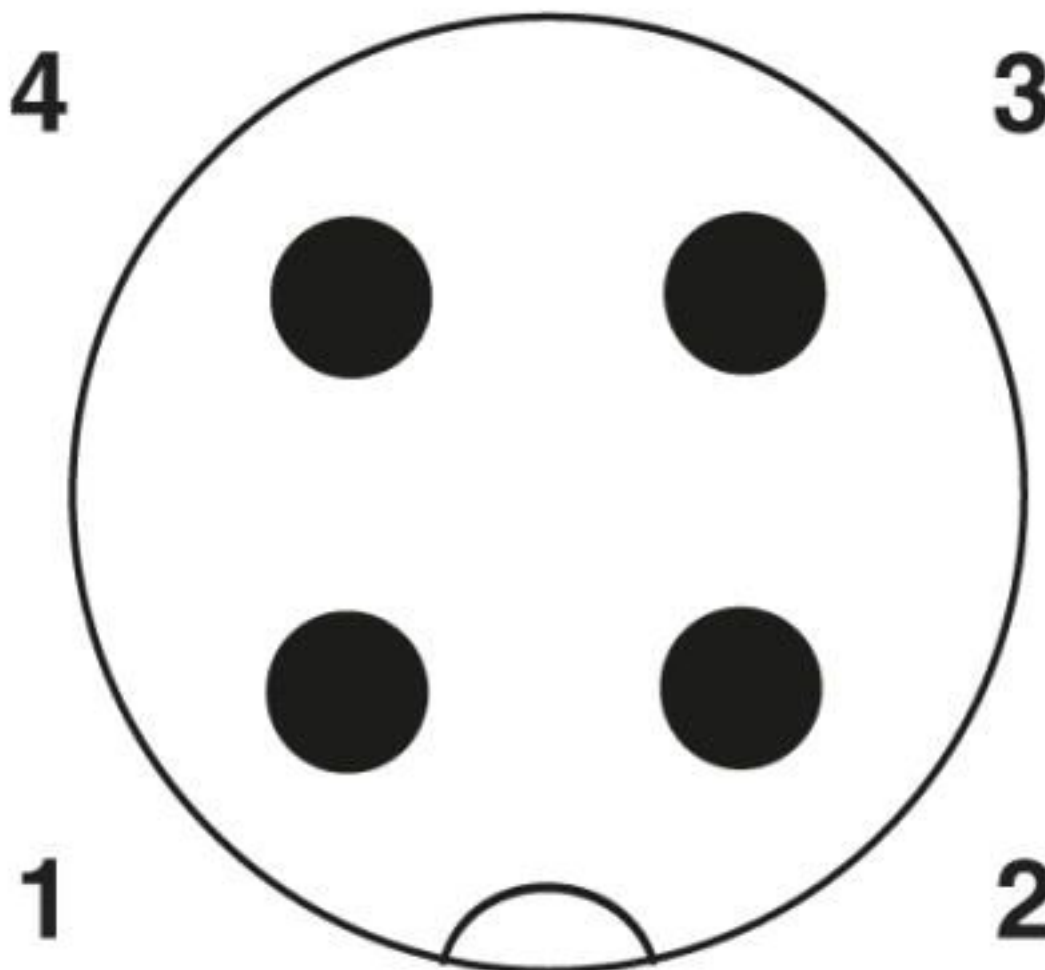

Pin assignment M12 plug, 4-pos., A-coded, view plug side

# Sensor/actuator cable - SAC-4P-M12MS/5,0-600 SH HD - 1403983

Cable cross section

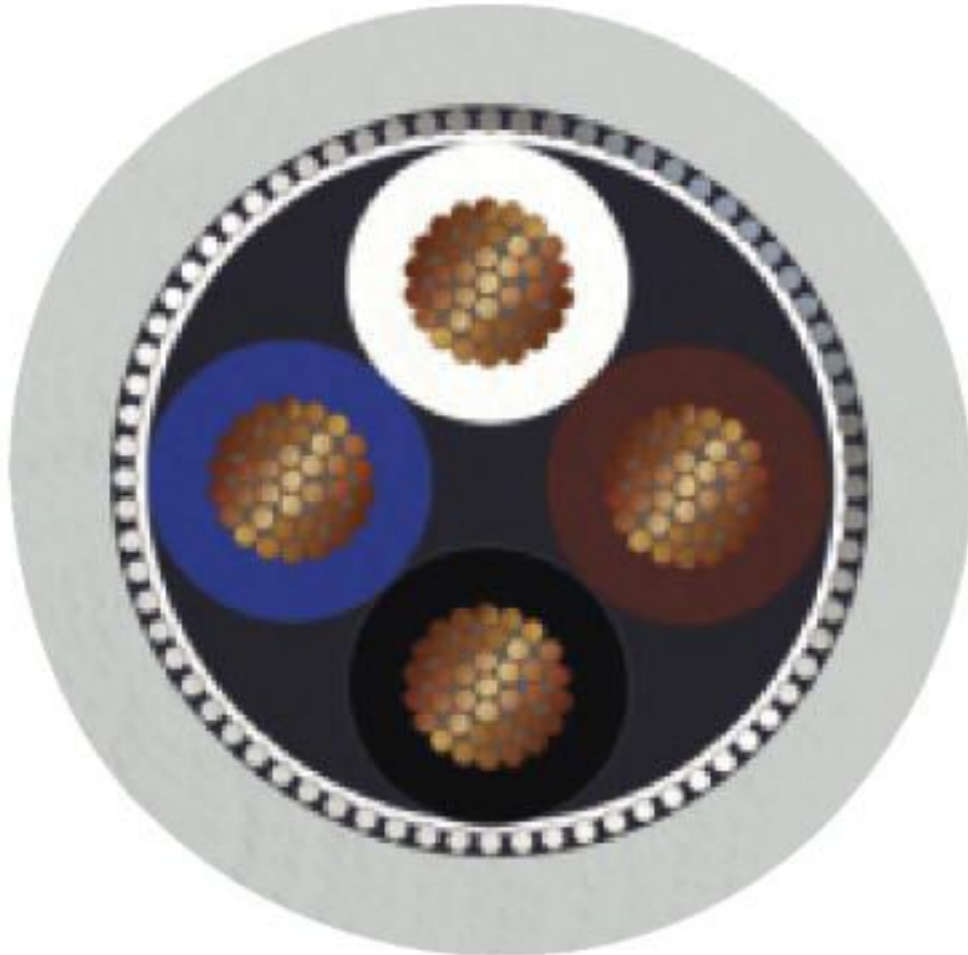

Halogen-free PP gray shielded [600]

## Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27060311 |
| eCl@ss 4.0    | 27060300 |
| eCl@ss 4.1    | 27060300 |
| eCl@ss 5.0    | 27061800 |
| eCl@ss 5.1    | 27061800 |
| eCl@ss 6.0    | 27279200 |
| eCl@ss 7.0    | 27279218 |
| eCl@ss 8.0    | 27279218 |
| eCl@ss 9.0    | 27060311 |

# Sensor/actuator cable - SAC-4P-M12MS/5,0-600 SH HD - 1403983

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |
| ETIM 6.0 | EC001855 |
| ETIM 7.0 | EC001855 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |
| UNSPSC 19.0   | 31251501 |
| UNSPSC 20.0   | 31251501 |
| UNSPSC 21.0   | 31251501 |

## Approvals

### Approvals

---

Approvals

EAC-RoHS

---

Ex Approvals

---

### Approval details

|          |  |                          |
|----------|--|--------------------------|
| EAC-RoHS |  | RU D-<br>DE.HB35.B.00387 |
|----------|--|--------------------------|

## Accessories

Accessories

Cutting tools

## Sensor/actuator cable - SAC-4P-M12MS/5,0-600 SH HD - 1403983

### Accessories

Diagonal cutter - CUTFOX-S VDE - 1212207



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

---

### Screwdriver tools

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

---

Adapter - SAC BIT M12-W14 - 1212513



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a hexagonal knurl wrench size of 14 mm, with 4 mm hexagonal drive

---

### Stripping tool

Stripping tool - WIREFOX SAC - 1212623



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from  $\varnothing$  of 4.4 to 7 mm, any stripping length

---

Stripping tool - WIREFOX 10 - 1212150



Stripping tool, for cables and conductors from 0.02 - 10 mm<sup>2</sup>, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm<sup>2</sup> stranded/1.5 mm<sup>2</sup> solid, replaceable stripping blade

---

### Torque tool



## Sensor/actuator cable - SAC-4P-M12MS/5,0-600 SH HD - 1403983

### Accessories

Torque screwdriver - TSD 04 SAC - 1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

---

Torque screwdriver - TSD-M 1,2NM - 1212224



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

---

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sensor Cables / Actuator Cables](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[60963](#) [60964](#) [703000D02F2002](#) [703001D02F0602](#) [703001D02F300](#) [704000D02F120](#) [773032K02F030](#) [802027107404-1](#) [802027213811-1](#)  
[804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M020](#) [1200651332](#) [1200651713](#) [1200660844](#) [1200660845](#)  
[1200661173](#) [1200680071](#) [1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#) [1200860125](#) [1200870123](#) [1200980102](#)  
[1200650267](#) [1200650298](#) [1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#) [1200661342](#) [1200661343](#) [1200670080](#)  
[1200670220](#) [1200680331](#) [1200720252](#) [1200730184](#) [1200860344](#) [1200870359](#) [1200870643](#) [1200980008](#) [1200980031](#) [1210502211](#)  
[1210400542](#) [1211810021](#)