

## FO connectors - FOC-C-SCRJ-PCF - 1411304

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



SC-RJ connector, with bend protection, for 200/230  $\mu\text{m}$ , 50/200/230  $\mu\text{m}$ , and 62.5/200/230  $\mu\text{m}$  PCF fibers

SC-RJ

### Product Description


SC-RJ connector, with bend protection, for 200/230  $\mu\text{m}$ , 50/200/230  $\mu\text{m}$ , or 62.5/200/230  $\mu\text{m}$  PCF fibers

### Your advantages

- ✓ For quick and easy field assembly
- ✓ No bonding or polishing
- ✓ Optimum attenuation values with easy assembly
- ✓ Fulfills IEC 61753 category: Extreme Environment
- ✓ Cleave technology
- ✓ Suitable for the following fiber types: 200/230  $\mu\text{m}$ , 50/200/230  $\mu\text{m}$ , 62.5/200/230  $\mu\text{m}$



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 924931
GTIN	4046356924931

### Technical data

#### Mechanical characteristics

Number of slots	2
Insertion/withdrawal cycles	$\leq 500$
Cable outlet	straight
No. of cable outlets	2
Weight	8.3 g
Flammability rating according to UL 94	V0

#### Ambient conditions

# FO connectors - FOC-C-SCRJ-PCF - 1411304

## Technical data

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (assembly)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Degree of protection	IP20

### Material data

Housing material	PBT
Width	16.5 mm
Height	8.94 mm
Length	56 mm

### Standards and Regulations


Flame resistance	yes
Flammability rating according to UL 94	V0

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings


Dimensional drawing

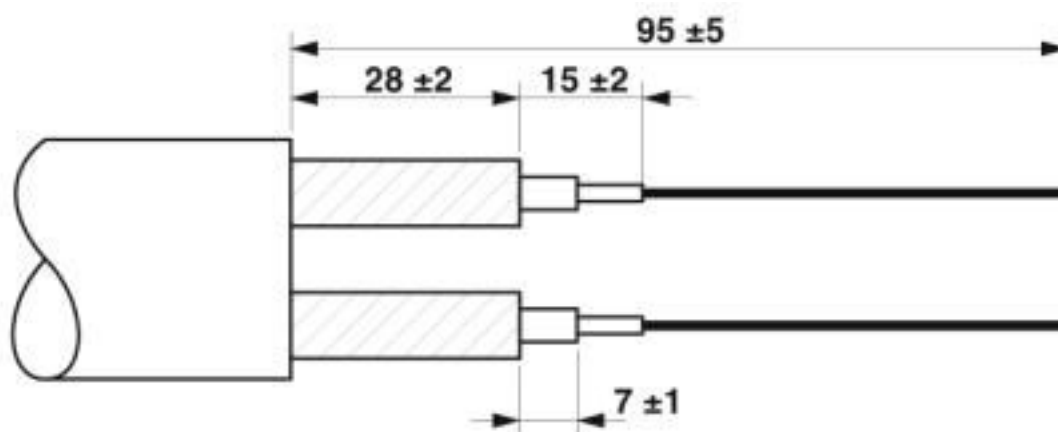

SC-RJ connector IP20

# FO connectors - FOC-C-SCRJ-PCF - 1411304

Schematic diagram

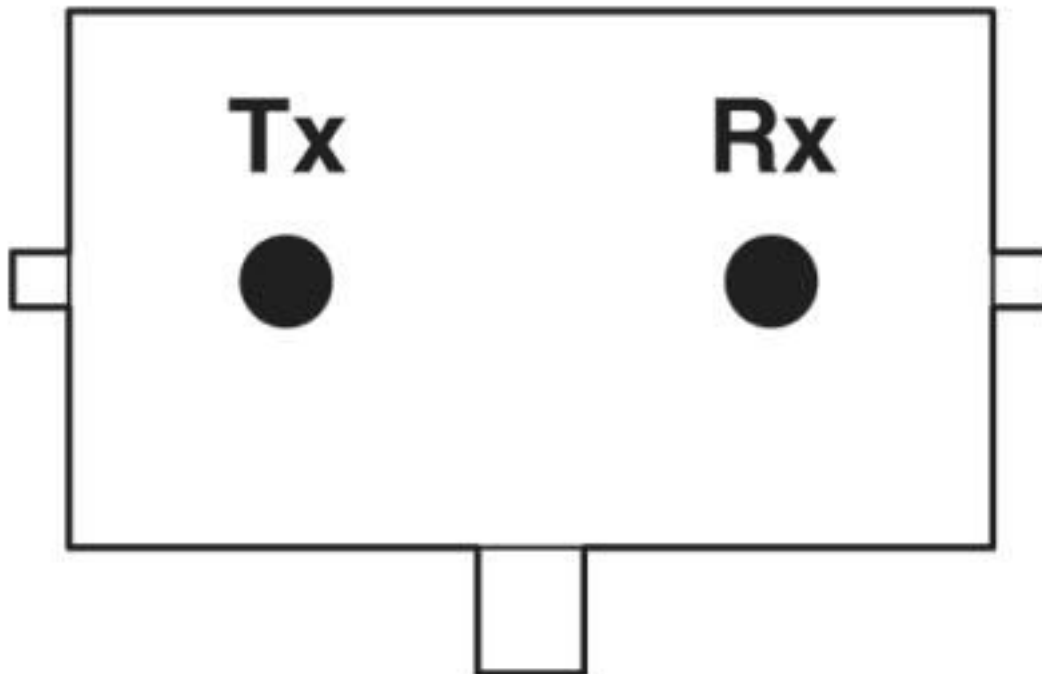

## Classifications

### eCl@ss

eCl@ss 10.0.1	19170122
eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27180800
eCl@ss 8.0	19170122
eCl@ss 9.0	19170122

### ETIM

ETIM 4.0	EC001031
ETIM 5.0	EC001122
ETIM 6.0	EC001122
ETIM 7.0	EC001122

### UNSPSC

UNSPSC 13.2	43223310
UNSPSC 18.0	43223310
UNSPSC 19.0	43223310
UNSPSC 20.0	43223310

# FO connectors - FOC-C-SCRJ-PCF - 1411304

## Classifications

### UNSPSC

UNSPSC 21.0	43223310
-------------	----------

## Approvals

### Approvals

---

### Approvals

EAC

---

### Ex Approvals

---

## Approval details

EAC		B.01742
-----	--	---------

## Accessories

### Accessories

#### Data plug

Tool set - FOC-TOOL-PCF KONF SET - 1411051



Tool set for PCF assembly, for 200/230 µm, 50/200/230 µm, and 62.5/200/230 µm PCF fibers

## Fiber optics connector (device side)

SC-RJ female insert - VS-SCRJ-GOF-BU/BU - 1652978



SC-RJ socket insert, duplex, for VS-A-F-IP67 panel mounting frame, can be used for fiberglass (multi-mode and single mode), PCF, and polymer fibers

## Necessary add-on products

## FO connectors - FOC-C-SCRJ-PCF - 1411304

### Accessories

Tool set - FOC-TOOL-PCF KONF SET - 1411051



Tool set for PCF assembly, for 200/230  $\mu\text{m}$ , 50/200/230  $\mu\text{m}$ , and 62.5/200/230  $\mu\text{m}$  PCF fibers

---

### Additional products

FO accessories - FOC-TOOL-FERRULECLEANER-2.50 - 1407029



2.50 mm ferrule cleaner, for ST, SC, FC, E2000 (also APC), approx. 500 cleaning cycles

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fibre Optic Connectors](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[0004700001](#) [6100-R](#) [6313](#) [F709722200](#) [F709730000](#) [F718183204](#) [F727403500](#) [F727752800](#) [8119](#) [9440F20-27S-190](#) [944-120-6001](#)  
[9441F10SL-3S](#) [9444W28-21S](#) [9444W36-10S](#) [9446F10SL-4S](#) [9446W20-16S](#) [953-101-5310-P](#) [954-101-57202B](#) [A0270169](#) [12-9122](#) [12-5702](#)  
[AX101713](#) [AX102420](#) [AX103923](#) [AX104024](#) [AX104193](#) [AX104230](#) [AX104562](#) [AX105203-B25](#) [AX105205-S1](#) [EHSC2M](#) [17-300800](#)  
[181-011-126](#) [181-011-S](#) [181-057-126](#) [HRFC-R2\(40\)](#) [NKSOPBUY](#) [20500002116](#) [2064996-1](#) [20800001065](#) [2170](#) [9132](#) [2612](#) [2620](#) [9291](#)  
[9440F16-10S](#) [9440F20-18S](#) [9446F16-10S-190](#) [953-106-50231](#) [953-120-5003](#)