

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Flush-type connector, Universal, 4-position, Plug, M12, A-coded, Front mounting, M16  $\times$  1.5, Individual wires, cable length: 0.5 m, 0.34 mm², TPE litz wire

### Your advantages

- ☑ Easy-to-install, optimized XL housing contour with wrench size 19
- Pre-assembled with litz wires for immediate use
- ☑ Customer-specific assemblies and litz wire lengths available
- Sealed on the litz wire side for optimum leak-tightness
- MI standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- For high transmission safety: shield connection to the housing with optional EMC nut



### Key Commercial Data

Packing unit	1 pc
GTIN	4 046356 936156
GTIN	4046356936156

### Technical data

#### **Dimensions**

Length of cable	0.5 m
A 12 ( PC	

#### Ambient conditions

Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
Degree of protection	IP67

#### General

The electrical and mechanical data specified assume that the compair is correctly locked and mounted. If the connector is unlocked there is a danger of contamination, the connector must be sealed a protective cap > IP54. Influences arising from litz wires, cables cassembly must also be taken into consideration.
--



## Technical data

### General

Rated current at 40°C	4 A
Rated voltage	250 V
Rated surge voltage	2.5 kV
Number of positions	4
Insulation resistance	$\geq$ 100 M $\Omega$
Coding	A - standard
Standards/regulations	M12 connector IEC 61076-2-101
Signal type/category	Universal
Status display	No
Overvoltage category	II
Degree of pollution	3
Connection method	Individual wires
Insertion/withdrawal cycles	> 100
Torque	0.8 Nm 1.3 Nm (Installation-side)
Mounting type	Front mounting M16 x 1.5 Tightening limitation

### Material

Flammability rating according to UL 94	V0
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	FKM

### Cable

Cable type	TPE litz wire
Conductor cross section	0.34 mm²
AWG signal line	22
Conductor structure signal line	7x 0.25 mm
Core diameter including insulation	1.2 mm ±0.07 mm
Thickness, insulation	0.21 mm (Core insulation)
Wire colors	brown, white, blue, black
Material conductor insulation	TPE
Conductor material	Tin-plated Cu litz wires
Standards/specifications	M12 connector IEC 61076-2-101
Insulation resistance	≥ 20 MΩ*km
Conductor resistance	≤ 57.6 mΩ/m
Nominal voltage, cable	300 V
Test voltage, cable	2000 V AC
Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)
	-25 °C 85 °C (cable, flexible installation)



# Technical data

### Standards and Regulations

Standards/specifications	M12 connector IEC 61076-2-101
Flammability rating according to UL 94	V0
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
	The products are suitable for applications in plant, controller, and electrical device engineering.
	When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
	Assembled products may not be manipulated or improperly opened.
	Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
	When using the product in direct connection with third-party manufacturers, the user is responsible.
	• For operating voltages > 50 V AC, conductive connector housings must be grounded
	Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
	Observe the corresponding technical data. You will find information: On the product On the packing label In the supplied documentation Online at phoenixcontact.com/products under the product
	Only use tools recommended by Phoenix Contact
	Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
	Ensure that the protective or functional ground has been properly connected.
	VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

## **Environmental Product Compliance**

China RoHS	Environmentally Friendly Use Period = 50 years




## Technical data

**Environmental Product Compliance** 

For details about hazardous substances go to tab "Downloads",
Category "Manufacturer's declaration"


# **Drawings**

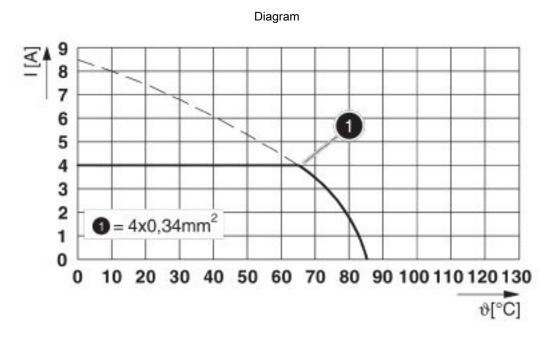

I = current strength, T = ambient temperature




Dimensional drawing

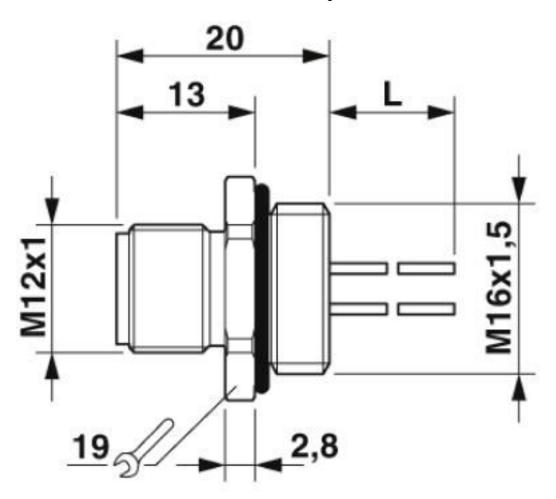


M12 flush-type plug



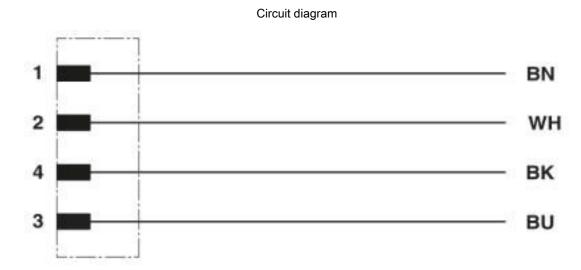

Contact assignment of the M12 connector



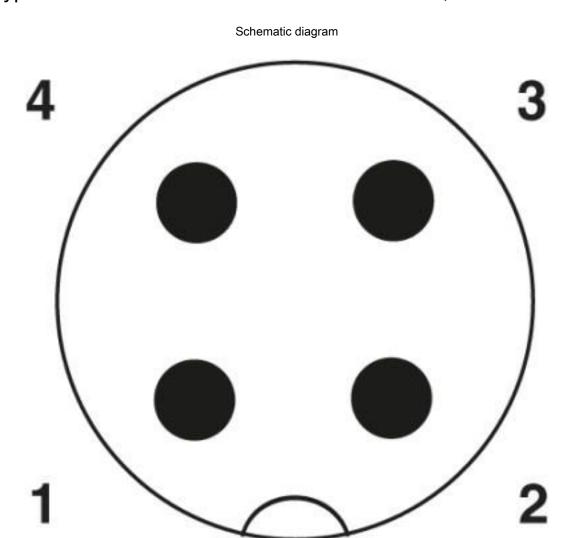

Pin assignment M12 plug, 4-pos., A-coded, view plug side

### Classifications

## eCl@ss

eCl@ss 10.0.1	27440102
eCl@ss 4.0	27140800
eCl@ss 4.1	27140800
eCl@ss 5.0	27143400
eCl@ss 5.1	27143400
eCl@ss 6.0	27279200
eCl@ss 7.0	27440103
eCl@ss 8.0	27440103
eCl@ss 9.0	27440102



# Classifications

### **ETIM**

ETIM 4.0	EC002061
ETIM 5.0	EC002061
ETIM 6.0	EC002061

### **UNSPSC**

UNSPSC 13.2	39121413
UNSPSC 18.0	39121413
UNSPSC 19.0	39121413
UNSPSC 20.0	39121413
UNSPSC 21.0	39121413

# Approvals

Approvals

Approvals

EAC / cULus Recognized

Ex Approvals

### Approval details

EAC	EAC		B.01687
-----	-----	--	---------

cULus Recognized	http://database.ul.co	http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E221474-20140616	
Nominal voltage UN		250 V	
Nominal current IN		4 A	
mm²/AWG/kcmil		22-20	

#### Accessories

Accessories

Circular connectors (device side)



### Accessories

Flat nut - SACC-E-MU-M16 - 1504097



Flat nut with M16 thread

#### Protective cap

Sealing cap - PROT-M12 FS - 1560251



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

#### Sealing cap - PROT-M12 FS-M - 1430488



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany

Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Sensor Cables / Actuator Cables category:

Click to view products by Phoenix Contact manufacturer:

Other Similar products are found below:

```
60963 60964 703000D02F2002 703001D02F0602 703001D02F300 704000D02F120 773032K02F030 802027107404-1 802027213811-1 804001A09M150 805001A09M0502 84914-0235 84914-0237 885030A09M020 8R4J30E03C3003 1200651332 1200651713 1200660844 1200660845 1200661173 1200680071 1200720053 1200720081 1200720099 1200720217 1200800231 1200860125 1200870123 1200980102 1200650267 1200650298 1200660183 1200660782 1200660849 1200661295 1200661297 1200661342 1200661343 1200670080 1200670020 1200670220 1200680331 1200720252 1200730184 1200860344 1200870359 1200870643 1200980008 1200980031 1210502211 1210400542
```