

Housing screw connection - SACC-BP-F-M12/M15-6-SMD - 1414021

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Housing screw connection, Socket, M12, Rear mounting, M15 x 1

Your advantages

- ☑ Reduced mounting costs thanks to two-piece device connector
- ☑ Easy device integration, thanks to mechanical port screw connections with threaded fastening



Key Commercial Data

Packing unit	20 pc			
Minimum order quantity	20 pc			
GTIN	4 055626 022642			
GTIN	4055626022642			

Technical data

Ambient conditions

Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)		
	-40 °C 85 °C (without mechanical actuation)		
Degree of protection	IP67 (correctly plugged in and locked)		

General

Note	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.				
Standards/regulations	M12 connector IEC 61076-2-101 In line with				
Insertion/withdrawal cycles	> 100				
Torque	1.5 Nm 2 Nm (Installation-side)				
Mounting type	Rear mounting M15 x 1 Spacing between the top edge of the PCB and the back of the front plate: 6 mm				

09/11/2020 Page 1 / 4



Housing screw connection - SACC-BP-F-M12/M15-6-SMD - 1414021

Technical data

Material

Material, knurls	Zinc die-cast, nickel-plated		
Material	Zinc die-cast (nickel-plated)		
Sealing material	FKM (O-ring on housing)		
	FKM (O-ring (pin connector pattern))		
Additional material specifications	Brass, nickel-plated (Locking nut)		

Cable

Standards/specifications	M12 connector IEC 61076-2-101 In line with

Standards and Regulations


Standards/specifications	M12 connector IEC 61076-2-101 In line with			
Standards/specifications	M12 connector IEC 61076-2-101 In line with			


Environmental Product Compliance

REACh SVHC	Lead 7439-92-1		
China RoHS	Environmentally Friendly Use Period = 50 years		
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"		

Drawings

Dimensional drawing

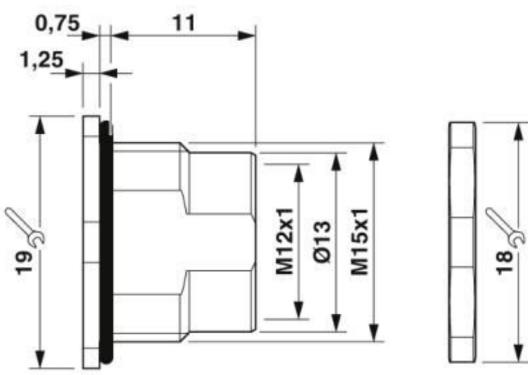





Housing screw connection - SACC-BP-F-M12/M15-6-SMD - 1414021

Classifications

eCl@ss

eCl@ss 10.0.1	23100602
eCl@ss 4.0	23100600
eCl@ss 4.1	23100600
eCl@ss 5.0	23100600
eCl@ss 5.1	23100600
eCl@ss 6.0	23100600
eCl@ss 7.0	23100602
eCl@ss 8.0	23100602
eCl@ss 9.0	23100602

ETIM

ETIM 4.0	EC001855
ETIM 5.0	EC002350
ETIM 6.0	EC002350
ETIM 7.0	EC002350

UNSPSC

UNSPSC 13.2	31171603
UNSPSC 18.0	31171603
UNSPSC 19.0	31171603
UNSPSC 20.0	31171603
UNSPSC 21.0	31171603

Approvals

Α	n	n	r	O)	v	a	ls
/\	ν	ν		v	v	ч	ı

Approvals

EAC

Ex Approvals

Approval details

EAC ENC



Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Metric Connectors category:

Click to view products by Phoenix Contact manufacturer:

Other Similar products are found below:

600X518037X 6STD15PCR99B70A 8R4000A16M020 8R5000A16M005 1200910002 1203580030 1200910008 1200910011 1300140094 130203-0054 1300140026 1300150099 RF-12S1N8A90DU 1612618 21036836414 8R4006A16M010 1604232 1R3006A20M005 RF-12P1N8A80DU RF-12P1N8A90DU 41-40011 42-00006 42-01015 4-22279-4 4-22281-1 4-22284-9 43-00113 43-01088 43-01203 41-40013 42-00008 43-00343 43-01026 43-01032 43-01162 43-01173 43-10000 XS3P-M421-2 600X518050X SACC-DSI-FS-5P-PG9-L180 SC 8R5006A16M020 8R5006A16M005 8R4000A16M010 6-22279-3 1605332 N03FA03144 1300140077 43-16213 43-01338 XS2RD4265